

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE FLUORESCENT LIGHTS

TCY20-2A Fluorescent Pendant Light

Application Applied to illumination of water dripping, water spattering, water coagulating place in military ship and ship, such engine room, dry cabin, tunnel, pepeline and weater deck etc.

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights	
Category	Marine Fluorescent Lights
Standard	GB
Material	Shell is good quality steel plate.
Weight / Size	Specification Type Voltage Power Lamp Holder Material Size Weight TCY20-...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications			
Category	Marine Fluorescent Lights	Model / SKU	TCY20-2A-Fluorescent-Pendant-Light
Standard	GB	Material	Shell is good quality steel plate.
Weight / Size	Specification Type Voltage Power Lamp Holder Material Size Weight TCY20-2A 110/220V 50/60Hz 2x18W G13 Steel/SS 715x500 6.6kg TCY20-2AE Steel/SS 6.7kg TCY40-2A 2x36W Steel 1330x1100 9.9kg TCY40-2AE Steel 10.0kg	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China TCY20-2A Fluorescent Pendant Light:

Application

Applied to illumination of water dripping, water spattering, water coagulating place in military ship and ship, such engine room, dry cabin, tunnel, pipeline and weater deck etc.

Protection Class	Application
IP20	Dry Living Cabin and dry control room
IP22	Sterring room, Refrigeator toom, emergency engine room, store room
IP34	Engine Room, boile room, steering gea room and aux machinery room
IP44	Bath roo, Machienry space, gallery and laundry
IP55	Engine room
IP56/IP66/IP67	Open Deck
IP68	Waterh deck and 20M underwater


Product Feature

1. Shell is good quality steel plate.
2. Lampshade adopts injection of AS with metal guard.
3. Environment temperature is -20-45 degree with the scope of work
4. Cable gland material: stainless steel, brass, bylon, protection class is IP56.
5. Stainless steel material should be selected for outdoor lighting.

Standard

1. Chapter 3, Part 4 of Classification Society Rules for Classification of Sea-going Steel Ships 2015 and its Amendments;
2. GB7000.1-2015 , Luminaires –Part1:General requirements and tests.

Specification

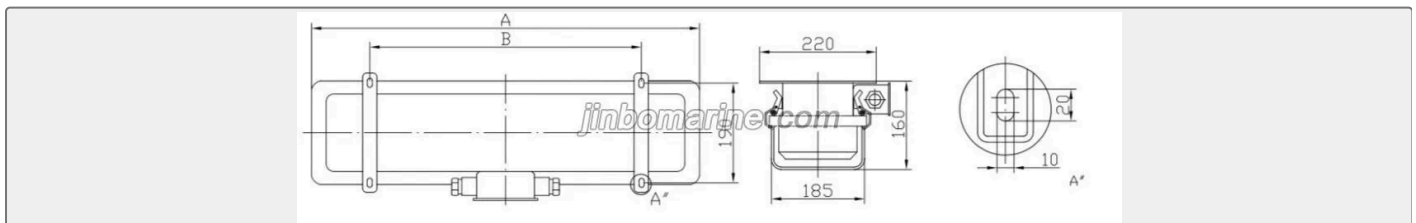

Type	Voltage	Power	Lamp Holder	Material	Size	Weight
------	---------	-------	-------------	----------	------	--------

TCY20-2A	110/220V 50/60Hz	2x18W	G13	Steel/SS	715x500	6.6kg
TCY20-2AE				Steel/SS		6.7kg
TCY40-2A		2x36W		Steel	1330x1100	9.9kg
TCY40-2AE				Steel		10.0kg

