

Jinbo Marine

Marine & Offshore Equipment Datasheet


PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (KOREA TYPE)

TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable)

- ISO9001 Supplier
- Class Certificate
- Export Supply

TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation; Tinned Copper Wire braided. Cable Construction Conductor: Tinned Copper. IEC 6022...

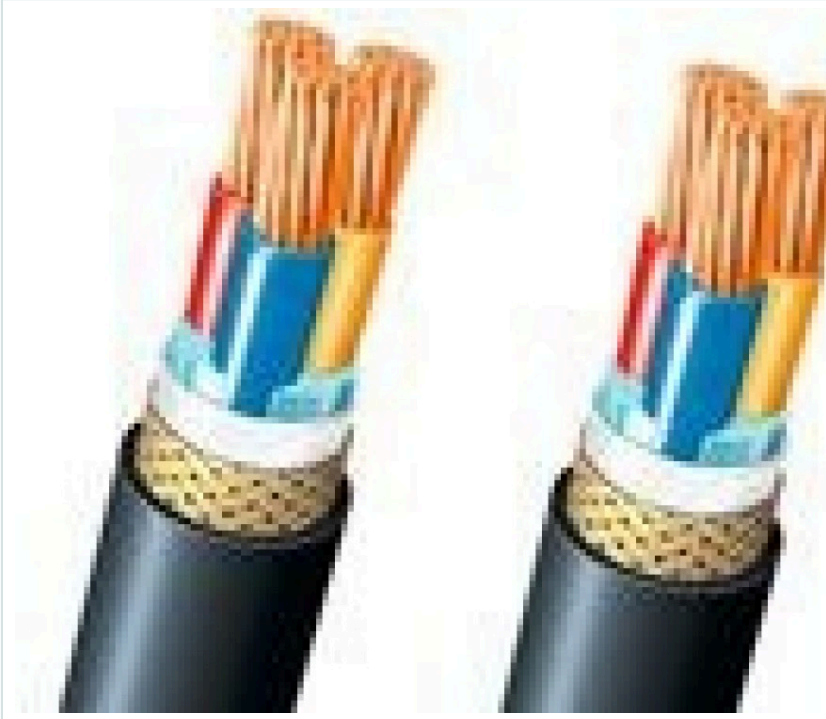
	Key Highlights	
	Category	IEC 60092 Standard Cable (Korea Type)
	Standard	EN
	Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1
	Weight / Size	TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable...
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		



Technical Specifications			
Category	IEC 60092 Standard Cable (Korea Type)	Model / SKU	TFOI-Flame-Retardant-Marine-Power-Control-Cable-0-6-1KV-Light-Weight-Cable
Standard	EN	Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1
Weight / Size	TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation;	Surface	Galvanized
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	■ China TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable):	■ Cable Construction
	■ Standards	■ Cores & Size
	■ Feature	■ Application

China TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable):

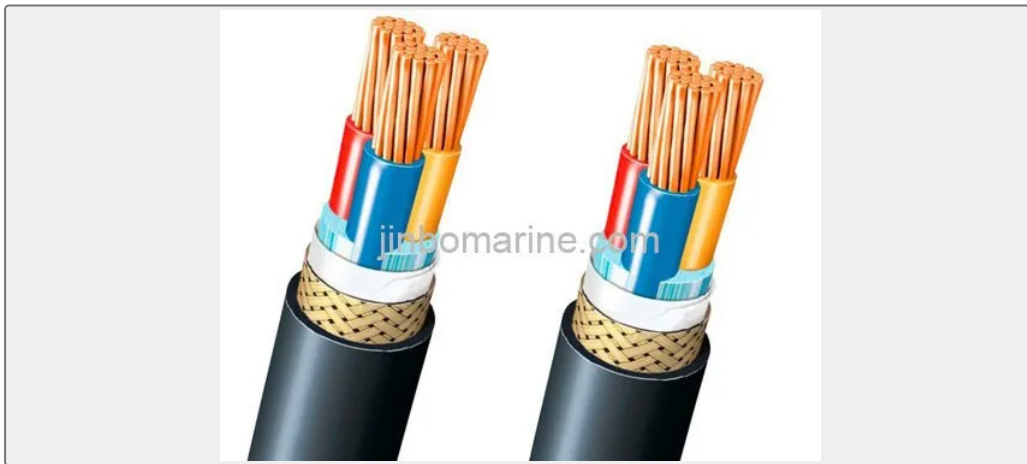

TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation; Tinned Copper Wire braided.

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Inner Covering: Halogen-Free Tape

Armour : Galvanized Wire Braided



Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

Feature

Halogen-free, Low Smoke, Flame retardant

Application

The cable is fixed installation on ships and offshore units, used for power, lighting and control.