

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (KOREA TYPE)


## TFOI(i) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable)

ISO9001 Supplier

Class Certificate

Export Supply

TFOI(i) Flame Retardant Marine telephone and instrument cable are individually screened by aluminum polyester with copper wire. Cable Construction &nbsp; Conductor: Tinned Copper. IEC 6...

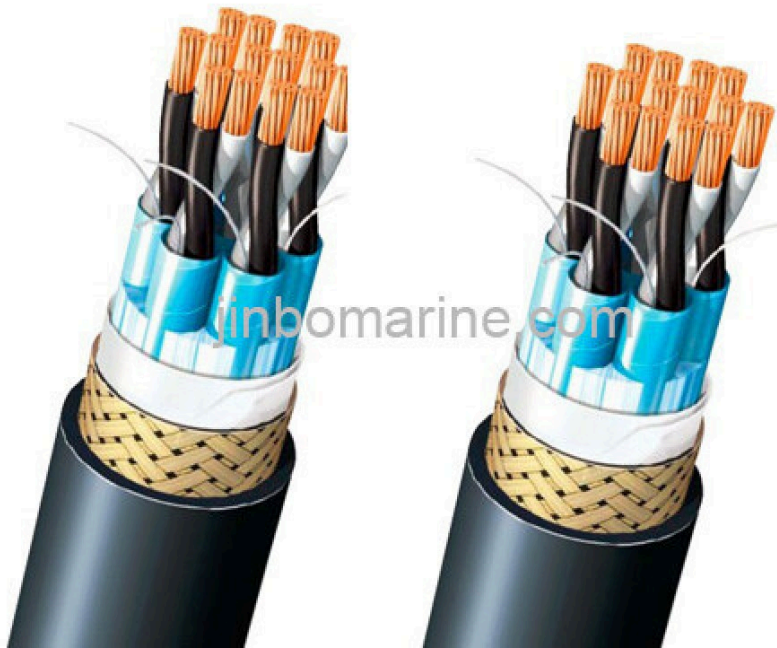

### Key Highlights

Category	IEC 60092 Standard Cable (Korea Type)
Standard	EN
Material	Tinned Copper/XLPE insulation/Copper Wire Screened/SHF1 Outer Sheath
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications


Category	IEC 60092 Standard Cable (Korea Type)	Model / SKU	TFOI-i-Flame-Retardant-Marine-Telephone-Cable-250V-Light-Weight-Cable
Standard	EN	Material	Tinned Copper/XLPE insulation/Copper Wire Screened/SHF1 Outer Sheath
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:	Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
Warranty	12 Months unless specified otherwise	Origin	China



**CONTENTS**

- China TFOI(i) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable):
- Standards
- Feature
- Cable Construction
- Cores & Size
- Application

## China TFOI(i) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable):

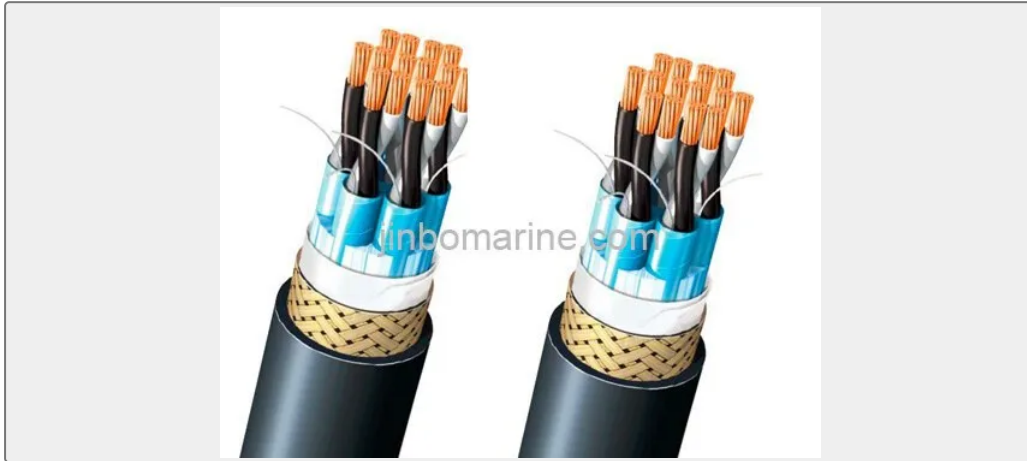

TFOI(i) Flame Retardant Marine telephone and instrument cable are individually screened by aluminum polyester with copper wire.

### Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Individual Screen: Each Pair/Triad individually screened by aluminum polyester tape with copper wire

Inner Covering: Halogen-Free Tape

Armour : Copper Wire Braided

Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

### Standards

Design : IEC 60092-350, 376

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

### Cores & Size

Cores: 1P, 2P,3P,4P,5P,7P,10P,12P,14P,16P,19P,20P, 24P, 30P (P:Pair)



1T, 2T,3T,4T,5T,7T,10T,12T,14T,16T,19T,20T, 24T, 30T (Triad)

Size (sqmm): 0.75, 1, 1.5, 2.5

## Feature

Halogen-free, Low Smoke, Flame retardant

## Application

The cable is fixed installation on ships and offshore units, used for telephone and instrument.