

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (KOREA TYPE)


## TXXI(c) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable)

ISO9001 Supplier

Class Certificate

Export Supply

TXXI(c) Flame Retardant Marine Telephone and Instrument Cable are collective screened by Aluminum Polyester with copper wire, 150/250V

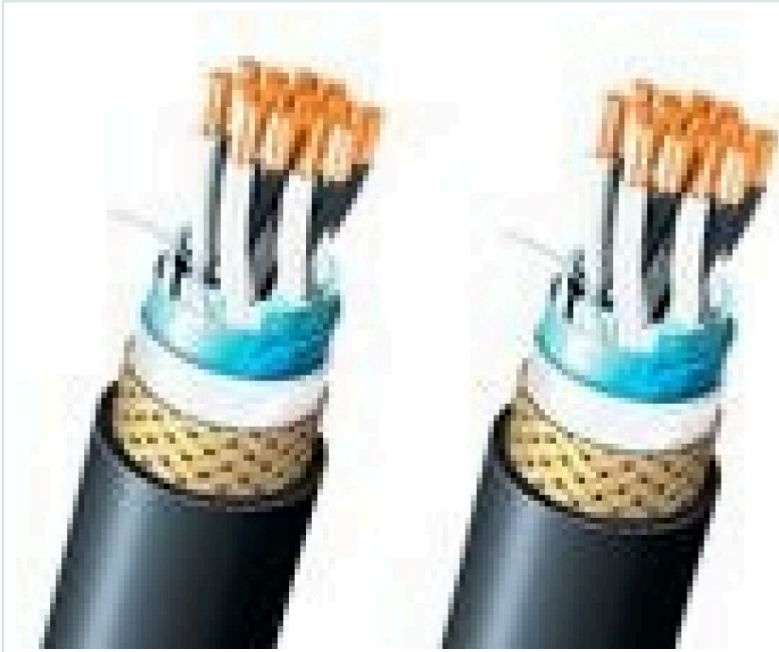

### Key Highlights

<b>Category</b>	IEC 60092 Standard Cable (Korea Type)
<b>Standard</b>	EN
<b>Material</b>	Tinned Copper/XLPE insulation/SHF1 Outer Sheath
<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:
<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications

<b>Category</b>	IEC 60092 Standard Cable (Korea Type)	<b>Model / SKU</b>	TXXI-c-Flame-Retardant-Marine-Telephone-Cable-250V-Light-Weight-Cable
<b>Standard</b>	EN	<b>Material</b>	Tinned Copper/XLPE insulation/SHF1 Outer Sheath
<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:	<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China



**CONTENTS**

- China TXXI(c) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable):
- Standards
- Feature
- Cable Construction
- Cores & Size
- Application

## China TXXI(c) Flame Retardant Marine Telephone Cable 250V (Light Weight Cable):



TXXI(c) Flame Retardant Marine Telephone and Instrument Cable are collective screened by Aluminum Polyester with copper wire, 150/250V

### Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Collective Screen: Pair/Triad laid up and collective screened by aluminum polyester tape with copper wire

Inner Covering: None

Armour : None

Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

### Standards

Design : IEC 60092-350, 376

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

### Cores & Size

Cores: 1P, 2P,3P,4P,5P,7P,10P,12P,14P,16P,19P,20P, 24P, 30P (P:Pair)



1T, 2T,3T,4T,5T,7T,10T,12T,14T,16T,19T,20T, 24T, 30T (Triad)

Size (sqmm): 0.75, 1, 1.5, 2.5

## **Feature**

Halogen-free, Low Smoke, Flame retardant

## **Application**

The cable is fixed installation on ships and offshore units, used for telephone and instrument.