

TSHD DREDGER DRAGHEAD

# Turbulence Visor draghead

Self-adjusting visor&nbsp;Turbulence Visor draghead are suitable for compact and firmly packed soil type, good performance. Technical Specification Suction Pipe &nbsp;Dia.(mm)...

ISO9001 Supplier

Class Certificate

Export Supply



### Key Highlights

<b>Category</b>	TSHD Dredger Draghead
<b>Standard</b>	ISO
<b>Material</b>	Steel
<b>Weight / Size</b>	Technical Specification Suction Pipe Dia.(mm) L(mm) C(mm) A(mm) B(mm) 4...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications

<b>Category</b>	TSHD Dredger Draghead	<b>Model / SKU</b>	Turbulence-Visor-draghead
<b>Standard</b>	ISO	<b>Material</b>	Steel
<b>Weight / Size</b>	Technical Specification Suction Pipe Dia.(mm) L(mm) C(mm) A(mm) B(mm) 420 1300 1000 1600 1340 550 1525 1100 1800 1560 600 1560 1190 1850 1560 700 1935 1255 2700 2600 800 2000 1550 2940 2750 900 2350 1650 3200 2850 1000 2850 1760 3700 3520 1200 3300 1850 4240 3700 Other sizes for rake head sereis can be customized	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China

**CONTENTS**

■ China Turbulence Visor draghead:


■ Technical Specification



## China Turbulence Visor draghead:

Self-adjusting visor Turbulence Visor draghead are suitable for compact and firmly packed soil type, good performance.

## Technical Specification

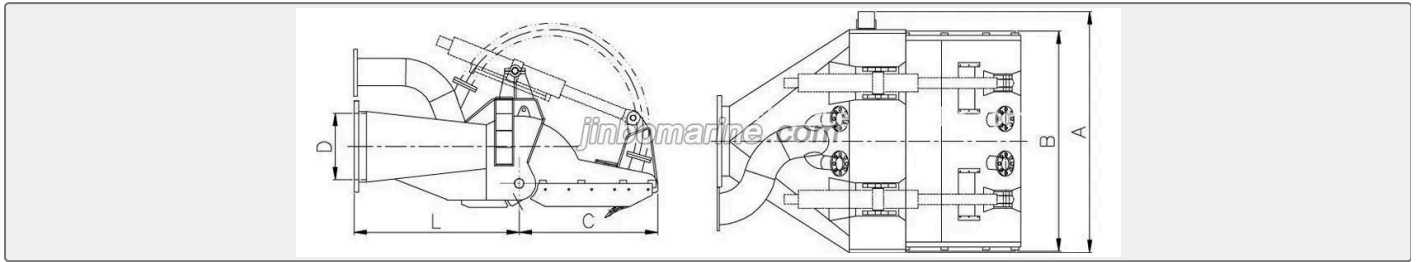

Suction Pipe Dia.(mm)	L(mm)	C(mm)	A(mm)	B(mm)
420	1300	1000	1600	1340
550	1525	1100	1800	1560
600	1560	1190	1850	1560
700	1935	1255	2700	2600
800	2000	1550	2940	2750
900	2350	1650	3200	2850
1000	2850	1760	3700	3520
1200	3300	1850	4240	3700

Other sizes for rake head series can be customized