

# Jinbo Marine

Marine & Offshore Equipment Datasheet


PRODUCT DATASHEET

WALL PANEL

## Type A Wall Panel

Type A Wall Panel Model Thickness Fire class Core material B50A 50MM B-15 ...

- ISO9001 Supplier
- Class Certificate
- Export Supply

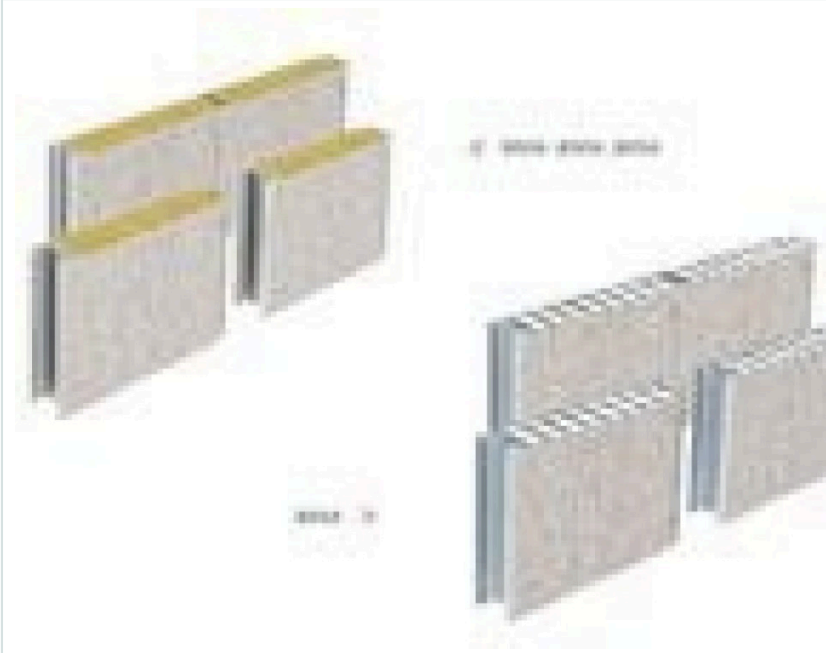
	Key Highlights	
	Category	Wall Panel
	Standard	EN
	Material	Galvanized/ Stainless steel plate with PVC film and rock wool
	Weight / Size	Type A Wall Panel Model Thickness Fire class Core material B50A 50MM B-1...
Certificate	ABS, LR, BV, GL, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		

Technical Specifications			
<b>Category</b>	Wall Panel	<b>Model / SKU</b>	Type-A-Wall-Panel
<b>Standard</b>	EN	<b>Material</b>	Galvanized/ Stainless steel plate with PVC film and rock wool
<b>Weight / Size</b>	Type A Wall Panel Model Thickness Fire class Core material B50A 50MM B-15 rock wool B30A 30mm B-15/B-0 rock wool B25A 25mm B-15/B-0 rock wool B25A 25mm B-0 Aluminum honeycomb B50AD 50mm B-15 rock wool B50AGa 50mm B-15 rock wool Main Specification Type B50A B30A B25A B25A Fire class B-15 B-15/B-0 B-15/B-0 B-0 Weight 16.0kg/m <sup>2</sup> 13.5kg/m <sup>2</sup> 12.9kg/m <sup>2</sup> 10.0kg/m <sup>2</sup> Sound reduction 33dB 31dB --dB --dB Thermal transmittance 0.58Kcal/m <sup>2</sup> h°C 1.10Kcal/m <sup>2</sup> h°C 1.14Kcal/m <sup>2</sup> h°C 3.35Kcal/m <sup>2</sup> h°C Core material Rock wool 150kg/m <sup>3</sup> Aluminum honeycomb Surface finish PVC film(150μ,low flame spread) or galvanized steel Dimension 25/30/50mm( t )×550mm( w )×length (max.3500mm) Tolerances Thickness0-1×Width0- 1×Length±3 Wall Panels mainly include standard panel, soud absorption panel, high sound reduction panel, double-layer panel, conduit panel, corner panel and wet-room panel etc.	<b>Surface</b>	galvanized
<b>Certificate</b>	ABS, LR, BV, GL, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

**CONTENTS**

- Type A Wall Panel

- Main Specification

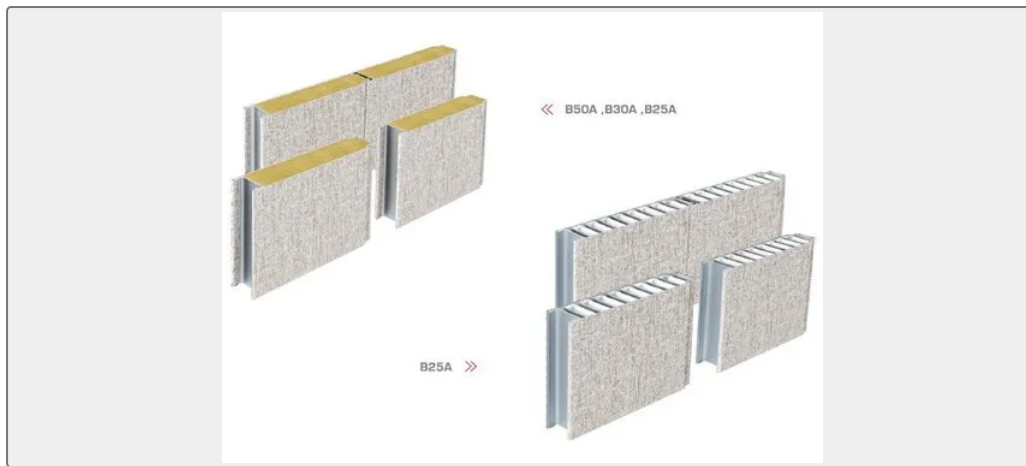

## Type A Wall Panel

Model	Thickness	Fire class	Core material
B50A	50MM	B-15	rock wool
B30A	30mm	B-15/B-0	rock wool
B25A	25mm	B-15/B-0	rock wool
B25A	25mm	B-0	Aluminum honeycomb
B50AD	50mm	B-15	rock wool
B50AGa	50mm	B-15	rock wool

## Main Specification

Type	B50A	B30A	B25A	B25A
Fire class	B-15	B-15/B-0	B-15/B-0	B-0
Weight	16.0kg/m <sup>2</sup>	13.5kg/m <sup>2</sup>	12.9kg/m <sup>2</sup>	10.0kg/m <sup>2</sup>
Sound reduction	33dB	31dB	--dB	--dB
Thermal transmittance	0.58Kcal/m <sup>2</sup> h°C	1.10Kcal/m <sup>2</sup> h°C	1.14Kcal/m <sup>2</sup> h°C	3.35Kcal/m <sup>2</sup> h°C
Core material	Rock wool 150kg/m <sup>3</sup>			Aluminum honeycomb
Surface finish	PVC film(150μ,low flame spread) or galvanized steel			
Dimension	25/30/50mm( t )×550mm( w )×length (max.3500mm)			
Tolerances	Thickness0-1×Width0-1×Length±3			

Wall Panels mainly include standard panel, sound absorption panel, high sound reduction panel, double-layer panel, conduit panel, corner panel and wet-room panel etc.