

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

HANGER AND ELASTIC SUPPORT

Type P1 Movable Elastic Hanger

The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance. Advantage: High temperature, low temperature resistance, oil resistance and aging resistance. The hanger ado...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Hanger And Elastic Support
Standard	EN
Weight / Size	Dimension Type P1 Movable Elastic Hanger Main Specifications Model Size ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Hanger And Elastic Support	Model / SKU	Type-P1-Movable-Elastic-Hanger
Standard	EN	Weight / Size	Dimension Type P1 Movable Elastic Hanger Main Specifications Model Size Static Load Workload A(mm) B(mm) C(mm) D(mm) kgf kgf P1-021 450-550 80 45 110 100 35 P1-025 450-551 100 60 120 200 70 P1-026 530-680 100 55 130 400 130 P1-027 530-680 125 75 130 600 200
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China Type P1 Movable Elastic Hanger:
 - Dimension
- Type P1 Movable Elastic Hanger Main Specifications



0.057029s

China Type P1 Movable Elastic Hanger:


The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance.

Advantage: High temperature, low temperature resistance, oil resistance and aging resistance.

The hanger adopts active joint, the length can be adjusted, and it can be move freely within the range of exhaust pipe thermal deformation.

Applicable range: suitable for horizontal or vertical exhaust pipe.

Dimension

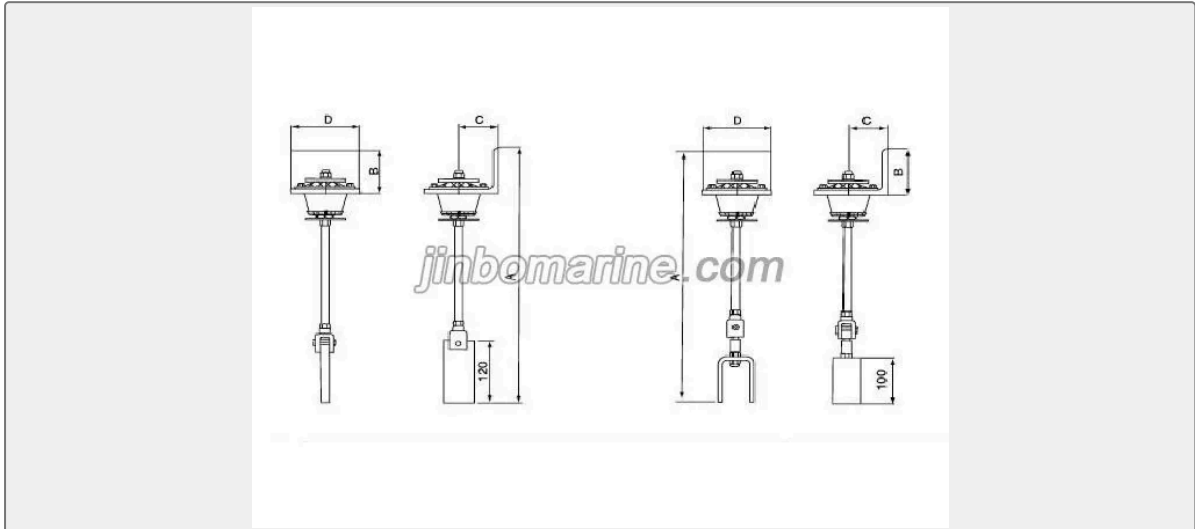

Type P1 Movable Elastic Hanger Main Specifications

Model	Size				Static Load	Workload
	A(mm)	B(mm)	C(mm)	D(mm)		
P1-021	450-550	80	45	110	100	35
P1-025	450-551	100	60	120	200	70
P1-026	530-680	100	55	130	400	130
P1-027	530-680	125	75	130	600	200

