

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

TURNBUCKLE

U.S. Type Turnbuckles With Hook And Hook

ISO9001 Supplier

Class Certificate

Export Supply

Main Specification Turnbuckle usually Forged, Free forged and Casting. The surface of turnbuckle original color, galvanised,hot galvanized Material is 45# Steel, Q235 Size Table ...



Key Highlights

| | |
|---------------|-----------------------------------------------------------------------------|
| Category | Turnbuckle |
| Standard | EN |
| Material | 45# Steel, Q235 |
| Weight / Size | The surface of turnbuckle original color, galvanised,hot galvanized Mate... |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



| Technical Specifications | | | |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------|
| Category | Turnbuckle | Model / SKU | U-S-Type-Turnbuckles-With-Hook-And-Hook |
| Standard | EN | Material | 45# Steel, Q235 |
| Weight / Size | The surface of turnbuckle original color, galvanised,hot galvanized Material is 45# Steel, Q235 Size Table Thread Dia & Take Up WLL(lbs) Weight(lbs) Dimensions(in) A D E Closed F J Open K Closed M Open N Closed BB 1/4x4 400 0.33 0.25 0.44 1.67 1.27 9.79 7.38 12.2 8.2 4.07 5/16x4 1/2 700 0.52 0.31 0.5 2 1.5 11.58 8.58 14.08 9.58 4.58 3/8x6 1000 0.83 0.38 0.56 2.28 1.77 15.23 10.62 17.84 11.84 6.1 1/2x6 1500 1.88 0.5 0.65 3.53 2.28 17.98 13.2 20.76 14.76 6.03 1/2x12 1500 2.77 0.5 0.65 3.51 2.28 30.27 19.49 33.05 21.05 12.36 5/8x6 2250 3.21 0.63 0.9 4.24 2.81 19.5 14.5 22.5 16.5 6.03 5/8x12 2250 4.58 0.63 0.9 4.23 2.81 31.84 20.84 34.84 22.84 12.39 3/4x6 3000 4.2 0.75 0.98 5.07 3.33 21.19 15.98 24.4 18.4 6.13 3/4x12 3000 6.92 0.75 0.98 5.04 3.33 33.59 22.38 36.8 24.8 12.59 3/4x18 3000 8.65 0.75 0.98 5.07 3.33 45.59 28.38 48.8 30.8 18.53 7/8x12 4000 9.85 0.88 1.13 5.82 3.78 34.89 23.52 38.26 26.26 12.16 1x12 5000 14.8 1 1.25 6.56 4.25 36.59 25.06 40.12 28.12 12.18 | Surface | galvanized |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | Warranty | 12 Months unless specified otherwise |
| Origin | China | | |

| | |
|-----------------|----------------------------------------------------------------------------------------------|
| CONTENTS | <ul style="list-style-type: none"> ■ Main Specification ■ Size Table |
|-----------------|----------------------------------------------------------------------------------------------|

Main Specification


Turnbuckle usually Forged, Free forged and Casting.



The surface of turnbuckle original color, galvanised,hot galvanized

Material is 45# Steel, Q235

Size Table

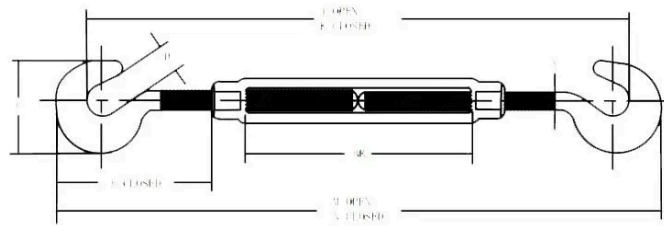

| Thread Dia & Take Up | WLL(lbs) | Weight(lbs) | Dimensions(in) | | | | | | | | | |
|----------------------------|----------|-----------------|----------------|------|----------|------|--------|----------|--------|----------|-------|--|
| | | | A | D | E Closed | F | J Open | K Closed | M Open | N Closed | BB | |
| 1/4x4 | 400 | 0.33 | 0.25 | 0.44 | 1.67 | 1.27 | 9.79 | 7.38 | 12.2 | 8.2 | 4.07 | |
| 5/16x4 1/2 | 700 | 0.52 | 0.31 | 0.5 | 2 | 1.5 | 11.58 | 8.58 | 14.08 | 9.58 | 4.58 | |
| 3/8x6 | 1000 | 0.83 | 0.38 | 0.56 | 2.28 | 1.77 | 15.23 | 10.62 | 17.84 | 11.84 | 6.1 | |
| 1/2x6 | 1500 | 1.88 | 0.5 | 0.65 | 3.53 | 2.28 | 17.98 | 13.2 | 20.76 | 14.76 | 6.03 | |
| 1/2x12 | 1500 | 2.77 | 0.5 | 0.65 | 3.51 | 2.28 | 30.27 | 19.49 | 33.05 | 21.05 | 12.36 | |
| 5/8x6 | 2250 | 3.21 | 0.63 | 0.9 | 4.24 | 2.81 | 19.5 | 14.5 | 22.5 | 16.5 | 6.03 | |
| 5/8x12 | 2250 | 4.58 | 0.63 | 0.9 | 4.23 | 2.81 | 31.84 | 20.84 | 34.84 | 22.84 | 12.39 | |
| 3/4x6 | 3000 | 4.2 | 0.75 | 0.98 | 5.07 | 3.33 | 21.19 | 15.98 | 24.4 | 18.4 | 6.13 | |
| 3/4x12 | 3000 | 6.92 | 0.75 | 0.98 | 5.04 | 3.33 | 33.59 | 22.38 | 36.8 | 24.8 | 12.59 | |
| 3/4x18 | 3000 | 8.65 | 0.75 | 0.98 | 5.07 | 3.33 | 45.59 | 28.38 | 48.8 | 30.8 | 18.53 | |
| 7/8x12 | 4000 | 9.85 | 0.88 | 1.13 | 5.82 | 3.78 | 34.89 | 23.52 | 38.26 | 26.26 | 12.16 | |
| 1x12 | 5000 | 14.8 | 1 | 1.25 | 6.56 | 4.25 | 36.59 | 25.06 | 40.12 | 28.12 | 12.18 | |