

MARINE LEVEL GAUGE

# UHZ-511 Type Normal Temperature Magnetic Float Type Level Gauge

ISO9001 Supplier

Class Certificate

Export Supply

Product Description: It can be used to measure and control the liquid level of tank in ship or other industrial equipment. It is use for measure the normal temperature liquid. Main Technical Specificati...



### Key Highlights

Category	Marine Level Gauge
Standard	GB
Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications

Category	Marine Level Gauge	Model / SKU	UHZ-511-Type-Normal-Temperature-Magnetic-Float-Type-Level-Gauge
Standard	GB	Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.
Warranty	12 Months unless specified otherwise	Origin	China

**CONTENTS**

- Product Description:
- Product Description:
- Model Sign:
- Main Technical Specification:
- Main Technical Specification:
- Overall Length:

### Product Description:

It can be used to measure and control the liquid level of tank in ship or other industrial equipment.

It is use for measure the normal temperature liquid.

## ■ Main Technical Specification:

Indication accuracy:  $\pm 20\text{mm}$

Nonimal length: 0.5 meter to 6 meter

Medium gravity: equal or greater than 0.5

Working temperature 1.0(1.6,2.5)MPa

Medium temperature: equal or less than 120 centigrade

Connection flange:GB2506-2005 DN20 PN16

Alarm switch: AC220V 1.0A retaining type(optional)

Output signal :DC24V 4~20mA (optional)

Matched valve:shut-off valve ,self-close valve,ball valve(optional)

## ■ Product Description:

It can be used to measure and control the liquid level of tank in ship or other industrial equipment.

It is use for measure the normal temperature liquid.

## ■ Main Technical Specification:

Indication accuracy:  $\pm 20\text{mm}$

Nonimal length: 0.5 meter to 6 meter

Medium gravity: equal or greater than 0.5

Working temperature 1.0(1.6,2.5)MPa

Medium temperature: equal or less than 120 centigrade


Connection flange:GB2506-2005 DN20 PN16

Alarm switch: AC220V 1.0A retaining type(optional)

Output signal :DC24V 4~20mA (optional)

Matched valve:shut-off valve ,self-close valve,ball valve(optional)

## Model Sign:

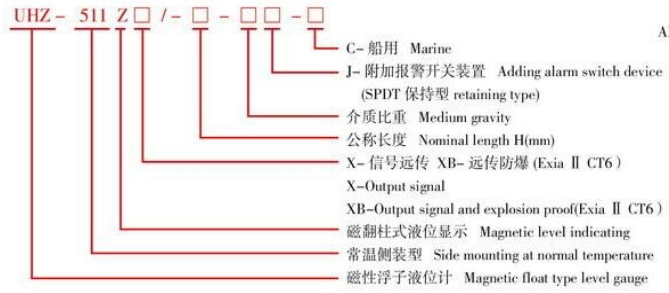

**Overall Length:**

