

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE LEVEL GAUGE

UQK-01 Type Float Type Level Controller

ISO9001 Supplier

Class Certificate

Export Supply

Product Specification: Marine Float Level Controller UQK-01 is widely used in the ship chemical industry and other industrial instrument to carry two place controlling and alarm to the level in liquid tank. ...



Key Highlights

Category	Marine Level Gauge
Standard	EN
Weight / Size	IP66 or IP68 Flange size is optional.
Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Marine Level Gauge	Model / SKU	UQK-01-Type-Float-Type-Level-Controller
Standard	EN	Weight / Size	IP66 or IP68 Flange size is optional.
Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.	Warranty	12 Months unless specified otherwise
Origin	China		

Product Specification:

Marine Float Level Controller UQK-01 is widely used in the ship chemical industry and other industrial instrument to carry two place controlling and alarm to the level in liquid tank.



0.047298s

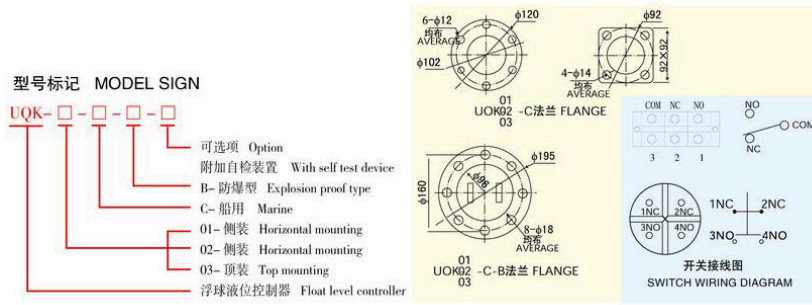

Model	Control range	Regulated type	Mounting position	Contact capacity	Float diameter(mm)
UQK-01-C	15~30	Fixed value Unadjustable	Horizontal mounting	SPDT AC 220V 1.5A suit for 250VAC 10A DC125V 0.6A 2 x SPDT(optional)	50
UQK-01-C-B					60
UQK-01-C	25~550	Can be adjust by step	Top mounting		76
UQK-02-C					50
UQK-02-C-B	60				
UQK-03-C	8~1000	Stepless,adjustable	Top mounting		76
UQK-03-C-B					

Nominal pressure: ≤1Mpa

Medium temperature: ≤120°C


Explosion proof type: Ex d II CT3~T6, Ex ia II CT3~T5.

Protection: IP66 or IP68

Flange size is optional.




UQK-01-C (铝或不锈钢壳 Aluminium or Stainless steel housing)

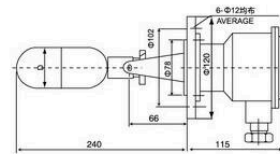

UQK-01-C




UQK-01-C (铜壳型 Copper housing)



UQK-01-C



UQK-01-C-Z (铜壳自检型 Copper housing with test device)




UQK-01-C-Z






UQK-01-C-Z


(铝壳自检型 Aluminium housing with test device)



UQK-01-C-Z

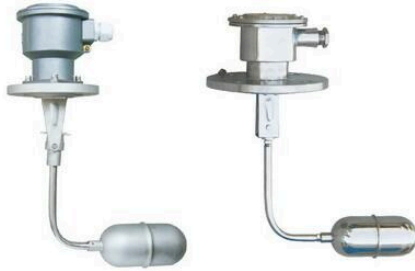


UQK-01-C (顶装型 Top mounting type)



UQK-01-C



UQK-01-C-B



UQK-01-C-B

型号规格 Model	控制范围 mm Control range	整定方式 Regulated type	安装位置 Mounting position	公称压力 PN	介质温度 Medium tem.	触点容量 Contact capacity	防爆型式 Explosion proof type	浮球直径 Float dia. D	防护等级 Protection
UQK-01-C	10-30	定值不可调 Fixed value & unadjustable	侧装 Horizontal mounting	≤ 1MPa	≤ 120℃	SPDT AC:220V 1.5A 可适用 250V AC 10A	Ex dIICT3-T6 ExiaIICT3-T5	Φ50	IP66 or IP68
UQK-01-C-B			顶装 Top mounting					Φ60	
UQK-01-C			侧装 Horizontal mounting					Φ76	
UQK-02-C	25-550	分级可调整 grading & adjustable	侧装 Horizontal mounting	≤ 1MPa	≤ 120℃	DC:125V 0.6A	Ex dIICT3-T6 ExiaIICT3-T5	Φ50	IP66 or IP68
UQK-02-C-B			顶装 Top mounting					Φ60	
UQK-03-C	8-1000	无级可调整 continuous & adjustable	顶装 Top mounting					≤ 1MPa	
UQK-03-C-B			侧装 Horizontal mounting	Φ50					