

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE LEVEL GAUGE

UQK-651/652 Type Float Level Controller

ISO9001 Supplier

Class Certificate

Export Supply

Product Description: It is widely used in ship, chemical industry and other equipment to control and alarm the level in tank by two position type. Main Technical Specification: Accuracy: $\pm 20\text{mm}$ S...



Key Highlights

Category	Marine Level Gauge
Standard	GB
Certificate	CCS, GL, LR, BV, ABS, NK, DNV, RINA, KR and EC certificate etc.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Level Gauge	Model / SKU	UQK-651-652-Type-Float-Level-Controller
Standard	GB	Certificate	CCS, GL, LR, BV, ABS, NK, DNV, RINA, KR and EC certificate etc.
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- Product Description:

- Main Technical Specification:

Product Description:

It is widely used in ship, chemical industry and other equipment to control and alarm the level in tank by two position type.

Main Technical Specification:

Accuracy: <math>< 20\text{mm}</math>



0.046809s

Switch TYPe :SPDT

Medium temperature: ≤ 150 °C

Working pressure:1.0MPa



Protection:IP66 /IP68



UQK-651-C



UQK-651-C-B







UQK-652-C



UQK-652-C-B



UQK-652-C-Z

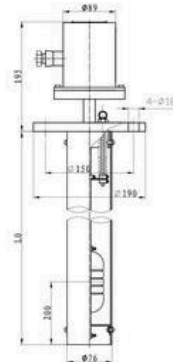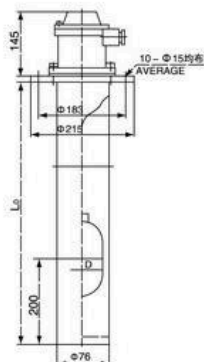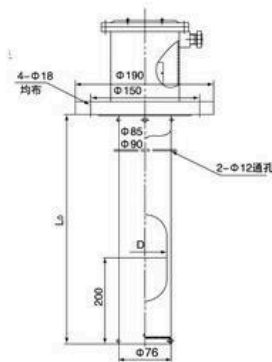

0.046809s

Model	Mounting type	Switch type	Switching error(mm)	Dead zone		Medium Gravity	Protective tube diameter(mm)	Float diameter(m m)
				Upper part	Lower part			
UQK-651-C UQK-651-C-B	Horizontal mounting	SPDT	20~70	---	---	0.8~1.2	---	60
UQK-652-C UQK-652-C-B	Top mounting		10~40	<150	<150		76mm	
UQK-651-C UQK-651-C-B	Flange standard	GB 2506-2005 GB/T 46-2007 651-C PN0.6 DN65 652-C PN0.6 DN80 652-B PN1.0 DN125	Contact capacity:SPDT AC250V 10A DC125V 0.6A 2xSPDT (optional)	Exd II CT3~T6 Ex ia II CT3-T6		---	---	60
UQK-652-C UQK-652-C-B				Range (mm) L0	300~2500mm			