SHACKLE

US Secutity Bow Shackle G1230, CSXK04BB

NOMINAL SIZE (in.) WLL (t)* A B C D E F G H L M ...

ISO9001 Supplier

Class Certificate

Export Supply




Key Highlights

Category	Shackle
Material	Stainless steel
Weight / Size	NOMINAL SIZE (in.) WLL (t)* A B C D E F G H L M N P 3/16 1/3 0.38 0.25 0...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Shackle	**Model / SKU**	US-SECUTITY-BOW-SHACKLE-G1230-CSXK04BB
Material	Stainless steel	**Weight / Size**	NOMINAL SIZE (in.) WLL (t)* A B C D E F G H L M N P 3/16 1/3 0.38 0.25 0.88 0.19 0.60 0.56 0.98 1.47 0.16 1.12 —— 0.19 1/4 1/2 0.47 0.31 1.13 0.25 0.78 0.61 1.28 1.84 0.19 1.38 1.34 0.25 5/16 3/4 0.53 0.38 1.22 0.31 0.84 0.75 1.47 2.09 0.22 1.66 1.59 0.31 3/8 1 0.66 0.44 1.44 0.38 1.03 0.91 1.78 2.49 0.25 2.03 1.86 0.38 7/16 1-1/2 0.75 0.50 1.69 0.44 1.16 1.06 2.03 2.91 0.31 2.38 2.13 0.44 1/2 2 0.81 0.63 1.88 0.50 1.31 1.19 2.31 3.28 0.38 2.69 2.38 0.50 5/8 3-1/4 1.06 0.75 2.38 0.63 1.69 1.50 2.94 4.19 0.44 2.34 2.91 0.69 3/4 4-3/4 1.25 0.88 2.81 0.75 2.00 1.81 3.50 4.97 0.50 3.97 3.44 0.81 7/8 6-1/2 1.44 1.00 3.31 0.88 2.28 2.09 4.03 5.83 0.50 4.50 3.81 0.97 1 8-1/2 1.69 1.13 3.75 1.00 2.69 2.38 4.69 6.56 0.56 5.07 4.53 1.06 1-1/8 9-1/2 1.81 1.25 4.25 1.16 2.91 2.69 5.16 7.47 0.63 5.59 5.13 1.25 1-1/4 12 2.03 1.38 4.69 1.29 3.25 3.00 5.75 8.25 0.69 6.16 5.50 1.38 1-3/8 13-1/2 2.25 1.50 5.25 1.42 3.63 3.31 6.38 9.16 .75 6.84 6.13 1.50 1-1/2 17 2.38 1.63 5.75 1.54 3.88 3.63 6.88 10.00 .81 7.35 6.50 1.62 1-3/4 25 2.88 2.00 7.00 1.84 5.00 4.19 8.86 12.34 1.00 9.08 7.75 2.25 2 35 3.25 2.25 7.75 2.08 5.75 4.81 9.97 13.68 1.22 10.34 8.75 2.40 2-1/2 55 4.13 2.75 10.50 2.71 7.25 5.69 12.87 17.84 1.38 13.00 —— 3.13
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China US Secutity Bow Shackle G1230, CSXK04BB:

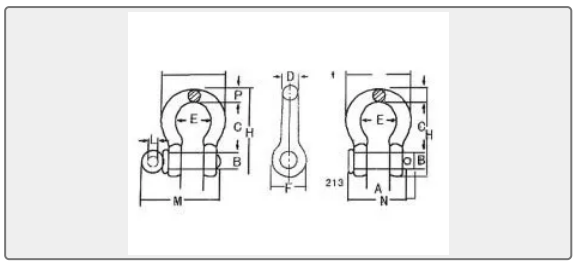

NOMINAL SIZE (in.)	WLL (t)*	A	B	C	D	E	F	G	H	L	M	N	P
3/16	1/3	0.38	0.25	0.88	0.19	0.60	0.56	0.98	1.47	0.16	1.12	——	0.19
1/4	1/2	0.47	0.31	1.13	0.25	0.78	0.61	1.28	1.84	0.19	1.38	1.34	0.25
5/16	3/4	0.53	0.38	1.22	0.31	0.84	0.75	1.47	2.09	0.22	1.66	1.59	0.31
3/8	1	0.66	0.44	1.44	0.38	1.03	0.91	1.78	2.49	0.25	2.03	1.86	0.38
7/16	1-1/2	0.75	0.50	1.69	0.44	1.16	1.06	2.03	2.91	0.31	2.38	2.13	0.44
1/2	2	0.81	0.63	1.88	0.50	1.31	1.19	2.31	3.28	0.38	2.69	2.38	0.50
5/8	3-1/4	1.06	0.75	2.38	0.63	1.69	1.50	2.94	4.19	0.44	2.34	2.91	0.69
3/4	4-3/4	1.25	0.88	2.81	0.75	2.00	1.81	3.50	4.97	0.50	3.97	3.44	0.81
7/8	6-1/2	1.44	1.00	3.31	0.88	2.28	2.09	4.03	5.83	0.50	4.50	3.81	0.97
1	8-1/2	1.69	1.13	3.75	1.00	2.69	2.38	4.69	6.56	0.56	5.07	4.53	1.06
1-1/8	9-1/2	1.81	1.25	4.25	1.16	2.91	2.69	5.16	7.47	0.63	5.59	5.13	1.25
1-1/4	12	2.03	1.38	4.69	1.29	3.25	3.00	5.75	8.25	0.69	6.16	5.50	1.38
1-3/8	13-1/2	2.25	1.50	5.25	1.42	3.63	3.31	6.38	9.16	.75	6.84	6.13	1.50
1-1/2	17	2.38	1.63	5.75	1.54	3.88	3.63	6.88	10.00	.81	7.35	6.50	1.62
1-3/4	25	2.88	2.00	7.00	1.84	5.00	4.19	8.86	12.34	1.00	9.08	7.75	2.25
2	35	3.25	2.25	7.75	2.08	5.75	4.81	9.97	13.68	1.22	10.34	8.75	2.40
2-1/2	55	4.13	2.75	10.50	2.71	7.25	5.69	12.87	17.84	1.38	13.00	——	3.13