MARINE KITCHEN GALLEY

UT-1 Marine Dishwasher

ISO9001 Supplier

Class Certificate

Export Supply

UT-1 Marine Dishwasher 1. Double-layer cabinet, energy saving and noise prevention 2. Deep-drawn integrated water tank, smooth rounded design, easy to clean High-efficiency triple filtration system 3. Automatic ...



Key Highlights

Category	Marine Kitchen Galley
Standard	EN
Material	SS
Weight / Size	The base form is suitable for installation and fixing on the ship UT-1 M...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Kitchen Galley	**Model / SKU**	UT-1-Marine-Dishwasher
Standard	EN	**Material**	SS
Weight / Size	The base form is suitable for installation and fixing on the ship UT-1 Marine Dishwasher Drawing UT-1 Marine Dishwasher Parameters Model UT-1 CSG50C Washing Capacity 40 baskets/hour 50 baskets/hour Voltage 380/415V-3PH-50Hz 440/480v 3ph-60Hz Power(kw) 6.85 6.5 Size(mm) 600X600X810 600X600X820 Weight(kg) 65 80	**Certificate**	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	**Origin**	China


CONTENTS

- UT-1 Marine Dishwasher
- UT-1 Marine Dishwasher Drawing
- UT-1 Marine Dishwasher Parameters

UT-1 Marine Dishwasher

1. Double-layer cabinet, energy saving and noise prevention
2. Deep-drawn integrated water tank, smooth rounded design, easy to clean
High-efficiency triple filtration system
3. Automatic cleaning function design
4. Microcomputer control, one-key operation, fault alarm diagnosis system
Recessed anti-clogging nozzle design, super cleaning ability
5. Three standard programs are available: cup washing, dish washing and full-function dish washing
6. The base form is suitable for installation and fixing on the ship

UT-1 Marine Dishwasher Drawing

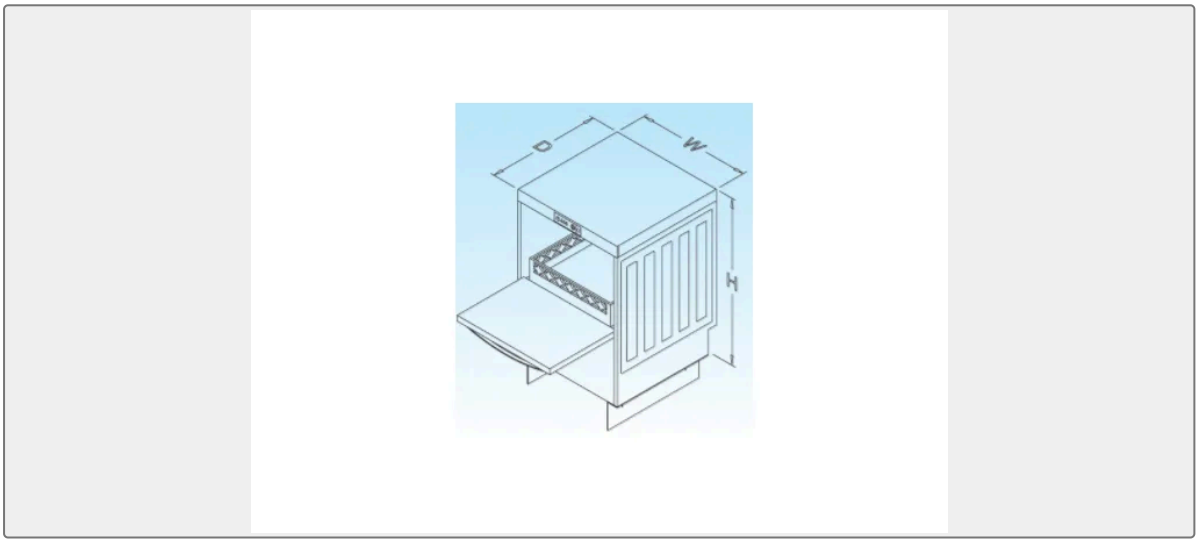

UT-1 Marine Dishwasher Parameters

Model	UT-1	CSG50C
Washing Capacity	40 baskets/hour	50 baskets/hour
Voltage	380/415V-3PH-50Hz 440/480v 3ph-60Hz	
Power(kw)	6.85	6.5
Size(mm)	600X600X810	600X600X820
Weight(kg)	65	80