


MARINE AIR RECEIVER

Vertical Marine Air Receiver

Marine Low-pressure Air Receiver is mainly used to store compressed air and supply start up or air whistle for main engine and auxiliary engine. Main Specification: Style ...


- ISO9001 Supplier
- Class Certificate
- Export Supply

	<h3 style="margin: 0;">Key Highlights</h3> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Category</td> <td style="padding: 5px;">Marine Air Receiver</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Standard</td> <td style="padding: 5px;">EN</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Material</td> <td style="padding: 5px;">Steel</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Weight / Size</td> <td style="padding: 5px;">Mpa Inner Dia mm Height mm Weight kg A A0.05-1.0 0.05 1 300 1050 70 A0.10-1.0 0.1 400 1270 125 A0.16-1.0 0.16 400 1750 155 A0.25-1.0 0.25 500 1760 180 A0.32-1.0 0.32 500 2170 248 A0.40-1.0 0.4 600 1865 260 A0.05-3.0 0.05 3 300 1050 100 A0.08-3.0 0.08 300 1360 120 A0.10-3.0 0.1 400 1270 165 A0.16-3.0 0.16 400 1750 215 A0.25-3.0 0.25 500 1760 195 A0.32-3.0 0.32 500 2100 345 A0.40-3.0 0.4 600 1865 410 A0.50-3.0 0.5 600 2270 450</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Certificate</td> <td style="padding: 5px;">CCS, BV, ABS, GL , LR, NK</td> </tr> </table> <p style="font-size: small; margin-top: 10px;">We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>	Category	Marine Air Receiver	Standard	EN	Material	Steel	Weight / Size	Mpa Inner Dia mm Height mm Weight kg A A0.05-1.0 0.05 1 300 1050 70 A0.10-1.0 0.1 400 1270 125 A0.16-1.0 0.16 400 1750 155 A0.25-1.0 0.25 500 1760 180 A0.32-1.0 0.32 500 2170 248 A0.40-1.0 0.4 600 1865 260 A0.05-3.0 0.05 3 300 1050 100 A0.08-3.0 0.08 300 1360 120 A0.10-3.0 0.1 400 1270 165 A0.16-3.0 0.16 400 1750 215 A0.25-3.0 0.25 500 1760 195 A0.32-3.0 0.32 500 2100 345 A0.40-3.0 0.4 600 1865 410 A0.50-3.0 0.5 600 2270 450	Certificate	CCS, BV, ABS, GL , LR, NK
Category	Marine Air Receiver										
Standard	EN										
Material	Steel										
Weight / Size	Mpa Inner Dia mm Height mm Weight kg A A0.05-1.0 0.05 1 300 1050 70 A0.10-1.0 0.1 400 1270 125 A0.16-1.0 0.16 400 1750 155 A0.25-1.0 0.25 500 1760 180 A0.32-1.0 0.32 500 2170 248 A0.40-1.0 0.4 600 1865 260 A0.05-3.0 0.05 3 300 1050 100 A0.08-3.0 0.08 300 1360 120 A0.10-3.0 0.1 400 1270 165 A0.16-3.0 0.16 400 1750 215 A0.25-3.0 0.25 500 1760 195 A0.32-3.0 0.32 500 2100 345 A0.40-3.0 0.4 600 1865 410 A0.50-3.0 0.5 600 2270 450										
Certificate	CCS, BV, ABS, GL , LR, NK										

Technical Specifications			
Category	Marine Air Receiver	Model / SKU	Vertical-Marine-Air-Receiver
Standard	EN	Material	Steel
Weight / Size	Mpa Inner Dia mm Height mm Weight kg A A0.05-1.0 0.05 1 300 1050 70 A0.10-1.0 0.1 400 1270 125 A0.16-1.0 0.16 400 1750 155 A0.25-1.0 0.25 500 1760 180 A0.32-1.0 0.32 500 2170 248 A0.40-1.0 0.4 600 1865 260 A0.05-3.0 0.05 3 300 1050 100 A0.08-3.0 0.08 300 1360 120 A0.10-3.0 0.1 400 1270 165 A0.16-3.0 0.16 400 1750 215 A0.25-3.0 0.25 500 1760 195 A0.32-3.0 0.32 500 2100 345 A0.40-3.0 0.4 600 1865 410 A0.50-3.0 0.5 600 2270 450	Certificate	CCS, BV, ABS, GL , LR, NK
Warranty	12 Months unless specified otherwise	Origin	China



China Vertical Marine Air Receiver:

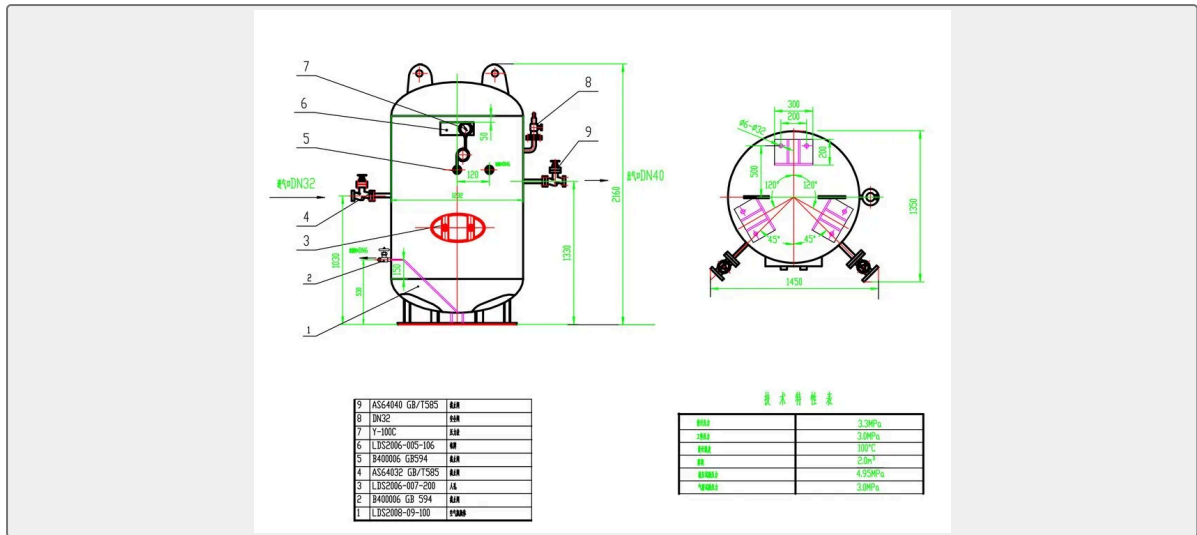

Marine Low-pressure Air Receiver is mainly used to store compressed air and supply start up or air whistle for main engine and auxiliary engine.

Main Specification:

Style	Type	Capacity(m3)	W.P. Mpa	Inner Dia mm	Height mm	Weight kg
A	A0.05-1.0	0.05	1	300	1050	70
	A0.10-1.0	0.1		400	1270	125
	A0.16-1.0	0.16		400	1750	155
	A0.25-1.0	0.25		500	1760	180
	A0.32-1.0	0.32		500	2170	248
	A0.40-1.0	0.4		600	1865	260
	A0.05-3.0	0.05	3	300	1050	100
	A0.08-3.0	0.08		300	1360	120
	A0.10-3.0	0.1		400	1270	165
	A0.16-3.0	0.16		400	1750	215
	A0.25-3.0	0.25		500	1760	195
	A0.32-3.0	0.32		500	2100	345
	A0.40-3.0	0.4		600	1865	410
	A0.50-3.0	0.5		600	2270	450

