MEDIUM PRESSURE WATER COOLED MARINE AIR COMPRESSOR

Vertical Water-cooling Two Stage Compressed Tanabe Air Compressor CZS Series

ISO9001 Supplier

Class Certificate

Export Supply

CZS series air compressors are mainly used for vessels and stationary diesel engine pneumatic, origin and industrial pressure test, wharf, airport, exploration, origin, such as health care, the required air compressor. ...



Key Highlights

Category	Medium Pressure Water Cooled Marine Air Compressor
Standard	GB
Weight / Size	Institutional characteristics CZS series air compressor is vertical, wat...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Medium Pressure Water Cooled Marine Air Compressor	**Model / SKU**	Vertical-Water-cooling-Two-Stage-Compressed-Marine-Air-Compressor-CZS-Series
Standard	GB	**Weight / Size**	Institutional characteristics CZS series air compressor is vertical, water cooled, two stage compression, compact structure, light weight, small size, suitable for Marine work normally under special conditions.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China Vertical Water-cooling Two Stage Compressed Tanabe Air Compressor CZS Series:
- Institutional characteristics
- Installation
- Specification


China Vertical Water-cooling Two Stage Compressed Tanabe Air Compressor CZS Series:

CZS series air compressors are mainly used for vessels and stationary diesel engine pneumatic, origin and industrial pressure test, wharf, airport, exploration, origin, such as health care, the required air compressor.

Institutional characteristics

CZS series air compressor is vertical, water cooled, two stage compression, compact structure, light weight, small size, suitable for Marine work normally under special conditions.

Installation

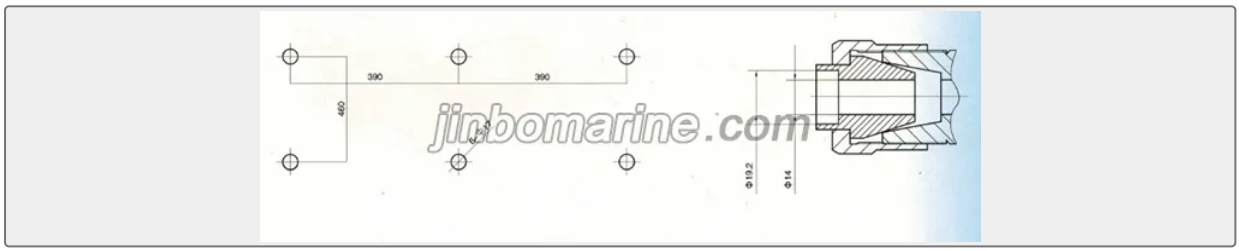

Specification

Compressor Model	CZS			
Type	Vertical Water-Cooled 2 stage Compression			
Quantity of Air Supply (m3/h)	25	29	36	45
Pressure Rating (MPa)	3			
Stalk Power (kw)	6.4	7	9.8	10.4
Rotation Rating (r/min)	870	960	1170	1460
Quantity of Cooling Water(m3/h)	0.54	0.6	0.72	0.9
Lubricating System	Splash Lubrication			
Lubricate Trademark	L-DAB-100 (GB12691)			
Type of Unloader	Manual,Total closure suction type or Magnetic Unloader Valve			
Method of Driving	Direct Coupling			
Motor				
model	Y160L-8-H	Y160M-6-H	Y160L-6-H	Y160M-4-H
Power (kw)	7.5	7.5	11	11
Rotation (r/min)	870	960	1170	1460
Gradeprotection	IP44			

Ins Class	B			
Voltage(V)	440	380	440	380
Frequency(HZ)	60	50	60	50
Shape size(mm)	1120×556×900			
Weight(kg)	320		340	