

**CHAIN SLING**

# W04 Heavy Endless Type Flat Sling

Description: 1. It is especially suitable for the lifting of circular objects. 2. The strength and weight are relatively high, light and soft, and easy to use in a small space. 3. The slings of the flexible s...

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights	
<b>Category</b>	Chain Sling
<b>Standard</b>	EN
<b>Material</b>	Cotton, nylon, synthetic fiber, polyester fiber
<b>Weight / Size</b>	The strength and weight are relatively high, light and soft, and easy to...
<b>Certificate</b>	CNAS, API, CCS, DNV.GL, KR, BV, CE, PCT.GOST, JIS, GS
 We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications			
<b>Category</b>	Chain Sling	<b>Model / SKU</b>	W04-Heavy-Endless-Type-Flat-Sling
<b>Standard</b>	EN	<b>Material</b>	Cotton, nylon, synthetic fiber, polyester fiber
<b>Weight / Size</b>	The strength and weight are relatively high, light and soft, and easy to use in a small space.	<b>Surface</b>	The outer surface of the flexible lifting belt is fine, and the smooth object will not cause damage, and will not cause damage to the vulnerable object.
<b>Certificate</b>	CNAS, API, CCS, DNV.GL, KR, BV, CE, PCT.GOST, JIS, GS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

<b>CONTENTS</b>	■ Description:	■ Performance:
	■ Data sheet:	

## Description:



1. It is especially suitable for the lifting of circular objects.
2. The strength and weight are relatively high, light and soft, and easy to use in a small space.
3. The slings of the flexible slings are mostly hoisted and the slings are evenly stressed, so that the working life of the slings is longer.
4. There are many lifting methods, which can also be used to pull the hanging objects.
5. can be attached to the anti-wear and anti-cut protective sleeve.
6. no electricity, no risk of electric shock.
7. The outer surface of the flexible lifting belt is fine, and the smooth object will not cause damage, and will not cause damage to the vulnerable object.

## Performance:

Strength: Flat sling with 1T-30T round sling with 1T-300T


Bandwidth: 25mm-250mm

Elastic elongation: <10% under rated load 2%-3% under ultimate working force

Load identification: During use, the label on the sling can be worn to identify the tonnage through the color of the sling jacket.

Working temperature: -40~100°C Safety factor: 5:1 6:1 7:1

## Data sheet:

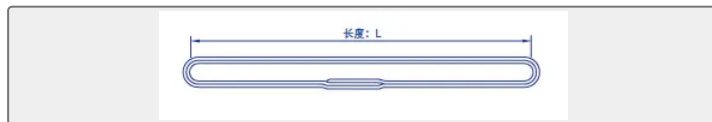

Art.No.	Working Load Limit ( kg )	Approx Width ( mm )		Minimum Length L ( m )
		4、 5、 6:1	7:01	
W04-02	2000	25	30	1

W04-04	4000	50	60	1
W04-06	6000	75	90	1
W04-08	8000	100	120	1.5
W04-10	10000	125	150	1.5
W04-12	12000	150	180	1.5
W04-16	16000	200	240	2
W04-20	20000	250	300	2
W04-24	24000	300	300	2

