

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE BOILER

WRY Marine Oil Fired Thermal Oil Bolier

ISO9001 Supplier

Class Certificate

Export Supply

Product Description: WRY Marine Oil-Fired Thermal Oil Bolier Working System:
Characteristic: Horizontal type Compact structure and easy operation Convection hea...



Key Highlights

Category	Marine Boiler
Standard	EN
Weight / Size	Modle Thermal Power (kw) Design Pressure (Mpa) Design Thermal Oil Temp...
Certificate	CCS, GL, LR, BV, DNV, ABS, NK, KR, RMRS, RINA

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Boiler	Model / SKU	WRY-Marine-Oil-Fired-Thermal-Oil-Bolier
Standard	EN	Weight / Size	<p>Modle Thermal Power (kw) Design Pressure (Mpa) Design Thermal Oil Temperature(°C) Medium Vloume Inside The Heater(m3) Dimension(mm) L D E F H WRY120-0.8 120 0.8 300 0.11 1700 Φ1100 DN150 DN65 1300 WRY350-0.8 350 300 0.22 2200 Φ1300 DN200 DN80 1500 WRY500-0.8 500 300 0.27 2300 Φ1320 DN250 DN100 1550 WRY600-0.8 600 300 0.32 2300 Φ1520 DN300 DN100 1750 WRY700-0.8 700 300 0.37 2500 Φ1530 DN300 DN100 1750 WRY900-0.8 900 300 0.46 2900 Φ1630 DN300 DN100 1750 WRY1000-0.8 1000 300 0.52 3030 Φ1640 DN300 DN125 1850 WRY1200-0.8 1200 300 0.61 3260 Φ1640 DN350 DN125 1850 WRY1500-0.8 1500 300 0.68 3680 Φ1750 DN350 DN125 1980 WRY1800-0.8 1800 300 1.23 4240 Φ1840 DN400 DN125 2080 WRY2000-0.8 2000 300 1.41 4550 Φ1940 DN400 DN125 2190 WRY2300-0.8 2300 300 1.49 4700 Φ1950 DN450 DN125 2200 WRY2500-0.8 2500 300 1.59 5010 Φ2050 DN500 DN125 2300 WRY3000-0.8 3000 300 1.83 5500 Φ2150 DN500 DN150 2400 WRY3500-0.8 3500 300 2.8 6000 Φ2300 DN550 DN150 2550 WRY4200-0.8 4200 300 3.35 6250 Φ2500 DN600 DN200 2680 WRY4600-0.8 4600 300 3.59 6250 Φ2630 DN650 DN200 2780 WRY6000-0.8 6000 300 4.35 6250 Φ3100 DN700 DN250 3250 WRY8000-0.8 8000 300 5.89 7500 Φ3400 DN800 DN250 3550</p>




Surface	Horizontal type Compact structure and easy operation Convection heating surface is of pin tube structure High temperature and low pressure.	Certificate	CCS, GL, LR, BV, DNV, ABS, NK, KR, RMRS, RINA
Warranty	12 Months unless specified otherwise	Origin	China


CONTENTS	■ Product Description:	■ Working System:
	■ Characteristic:	■ Technical data:

Product Description:


WRY Marine Oil-Fired Thermal Oil Bolier

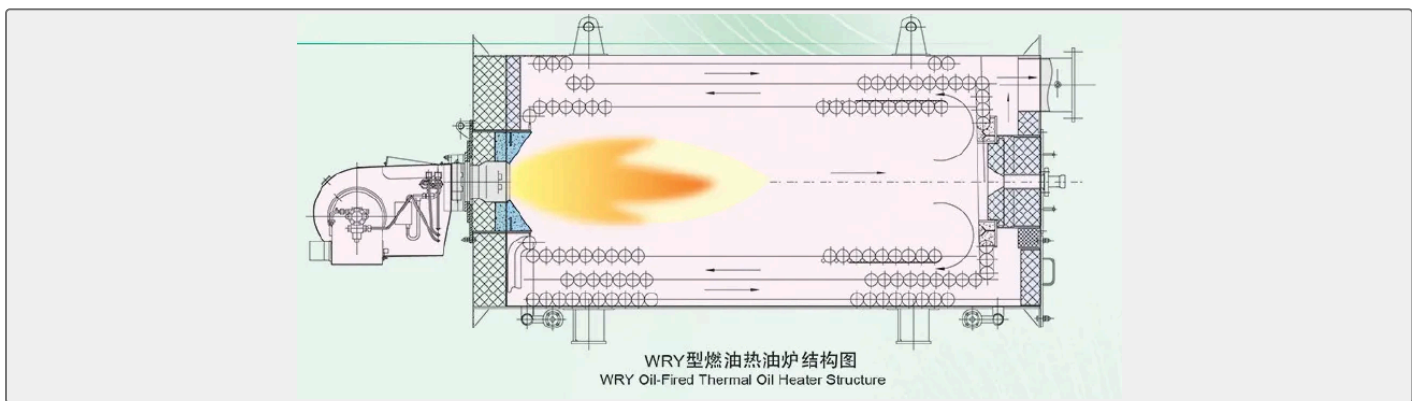

Working System:

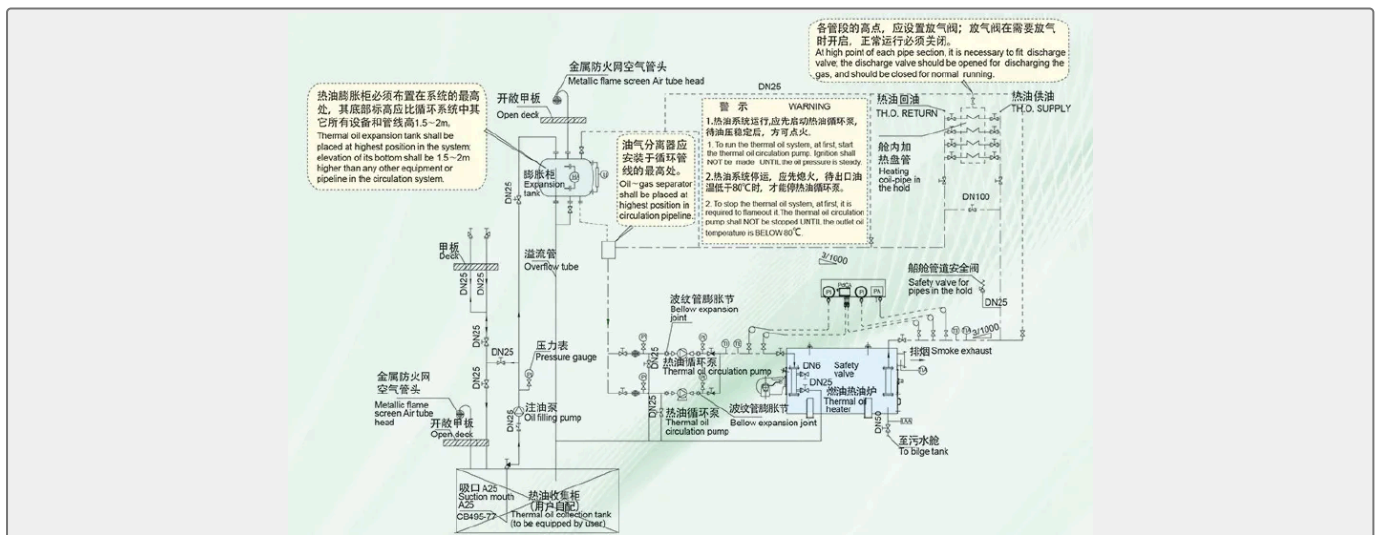


Characteristic:

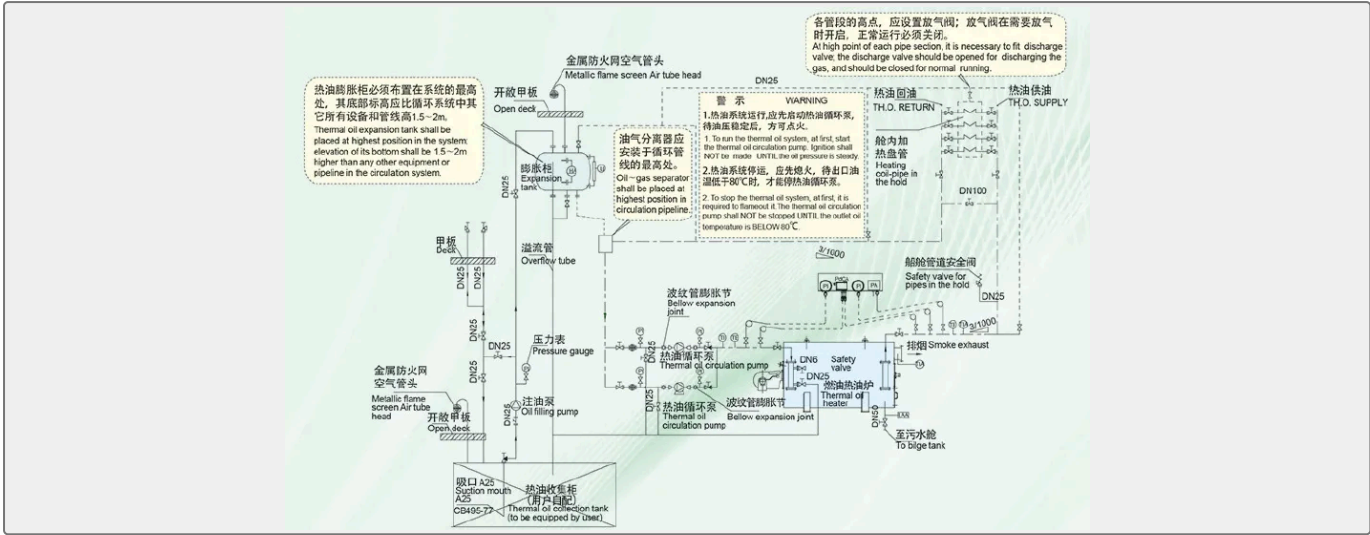

- Horizontal type
- Compact structure and easy operation
- Convection heating surface is of pin tube structure
- High temperature and low pressure. With higher system heat efficiency
- Compact construction and higher heat exchange efficiency
- Closed circulation heat supply, without emission and pollution
- Safe and reliable running
- Applicable for heating for marine fuel, chemicals and living

Technical data:

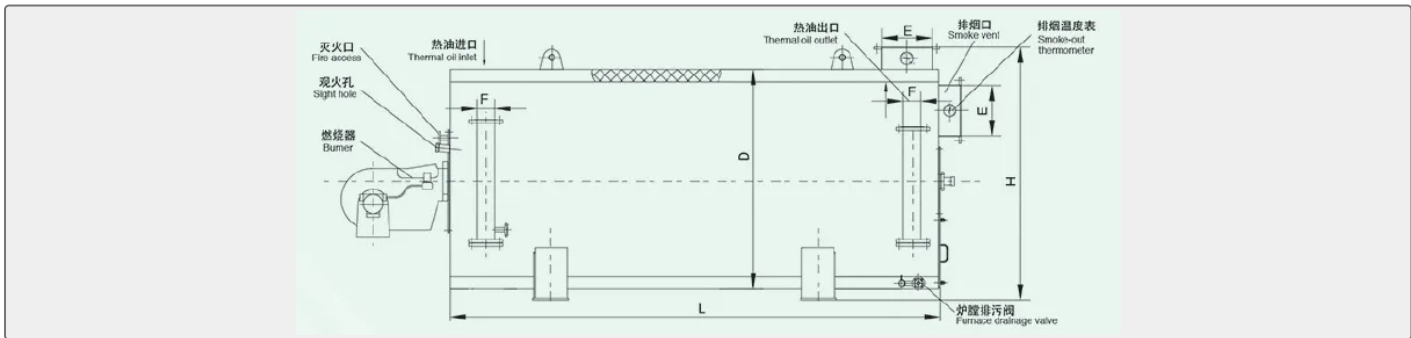

Model	Thermal Power (kw)	Design Pressure (Mpa)	Design Thermal Oil Temperature(°C)	Medium Volume Inside The Heater(m3)	Dimension(mm)				
					L	D	E	F	H



WRY120-0.8	120	0.8	300	0.11	1700	Φ1100	DN150	DN65	1300
WRY350-0.8	350		300	0.22	2200	Φ1300	DN200	DN80	1500
WRY500-0.8	500		300	0.27	2300	Φ1320	DN250	DN100	1550
WRY600-0.8	600		300	0.32	2300	Φ1520	DN300	DN100	1750
WRY700-0.8	700		300	0.37	2500	Φ1530	DN300	DN100	1750
WRY900-0.8	900		300	0.46	2900	Φ1630	DN300	DN100	1750
WRY1000-0.8	1000		300	0.52	3030	Φ1640	DN300	DN125	1850
WRY1200-0.8	1200		300	0.61	3260	Φ1640	DN350	DN125	1850
WRY1500-0.8	1500		300	0.68	3680	Φ1750	DN350	DN125	1980
WRY1800-0.8	1800		300	1.23	4240	Φ1840	DN400	DN125	2080
WRY2000-0.8	2000		300	1.41	4550	Φ1940	DN400	DN125	2190
WRY2300-0.8	2300		300	1.49	4700	Φ1950	DN450	DN125	2200
WRY2500-0.8	2500		300	1.59	5010	Φ2050	DN500	DN125	2300
WRY3000-0.8	3000		300	1.83	5500	Φ2150	DN500	DN150	2400
WRY3500-0.8	3500		300	2.8	6000	Φ2300	DN550	DN150	2550
WRY4200-0.8	4200		300	3.35	6250	Φ2500	DN600	DN200	2680
WRY4600-0.8	4600	300	3.59	6250	Φ2630	DN650	DN200	2780	
WRY6000-0.8	6000	300	4.35	6250	Φ3100	DN700	DN250	3250	
WRY8000-0.8	8000	300	5.89	7500	Φ3400	DN800	DN250	3550	