

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

DRAG ANCHOR

WS MK3 Anchor

MK3 Anchor is the improved version of Drag Anchor, equipped with an enlarged crown and fluke area and a streamline shank for more efficient penetration, this anchor is used in drag and drilling activi

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Drag Anchor
Standard	DIN
Material	High Grade Steel Plate
Weight / Size	We can delivery to everywhere around the world according to Incoterms 20...
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Drag Anchor	Model / SKU	WS-MK3-Anchor
Standard	DIN	Material	High Grade Steel Plate
Weight / Size	We can delivery to everywhere around the world according to Incoterms 2010 Main Dimension(mm in dimension, KGS in anchor weight) Weight A B C D E K L S 1000 2429 2654 1559 2023 737 1010 412 60 1500 2774 3038 1785 2316 843 1156 471 65 3000 3493 3828 2249 2918 1063 1456 594 80 5000 4120 4538 2667 346 1260 1727 704 80 7000 4602 5077 2983 3871 1409 1932 788 90 9000 5012 5521 3244 4209 1533 2100 857 100 12000 5516 6076 3570 4632 1687 2312 943 110 20000 6372 6986 4100 5324 2048 2674 1083 160 30000 7289 7997 4694 6094 2345 3061 1240 180 Trasnportion Size, please contact us directly.	Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS		
	■ China WS MK3 Anchor:	■ Main Dimension(mm in dimension, KGS in anchor weight)
	■ How to connect MK3 Anchor and Chain	

China WS MK3 Anchor:

WS MK3 Anchor is the improved version of drag Anchor, equipped with an enlarged crown and fluke area and a streamline shank for more efficient penetration, this anchor is used in drag and drilling activities.

This anchor approved by International class society.

We can delivery to everywhere around the world according to Incoterms 2010

Main Dimension(mm in dimension, KGS in anchor weight)



WS MK3 Anchor

Weight	A	B	C	D	E	K	L	S
1000	2429	2654	1559	2023	737	1010	412	60
1500	2774	3038	1785	2316	843	1156		




0.038242s

3000	3493	3828	2249	2918	1063	1456	594	80
5000	4120	4538	2667	346	1260	1727	704	80
7000	4602	5077	2983	3871	1409	1932	788	90
9000	5012	5521	3244	4209	1533	2100	857	100
12000	5516	6076	3570	4632	1687	2312	943	110
20000	6372	6986	4100	5324	2048	2674	1083	160
30000	7289	7997	4694	6094	2345	3061	1240	180

Trasnportion Size, please contact us directly.

How to connect MK3 Anchor and Chain

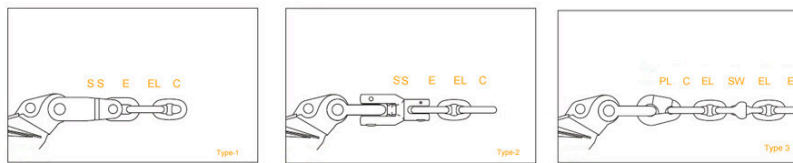

SS: Swivel Shackle E: End Link EL: Enlarged Link C: Common Link, PL: Pear Link Shackle.
SW: Swivel