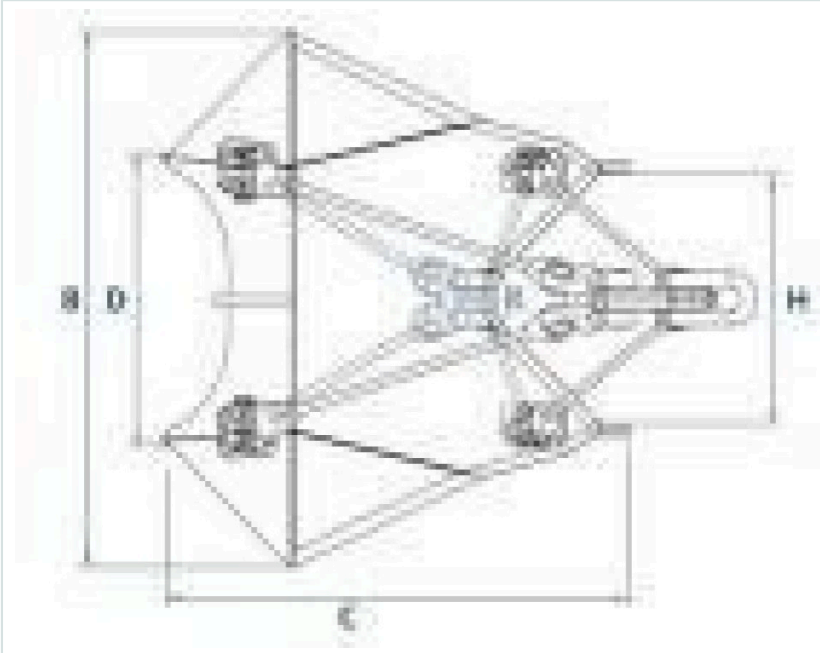


DRAG ANCHOR


WS Vertical Loaded Ancor (VLA) Anchor


- ISO9001 Supplier
- Class Certificate
- Export Supply

Advantage of WS VLA Anchor Minimum engineering Anchor adjust to soil characteristics Light weight, easy to install Safe taut leg mooring.

	<h3 style="margin: 0;">Key Highlights</h3> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Category</td> <td style="padding: 5px;">Drag Anchor</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Standard</td> <td style="padding: 5px;">EN</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Material</td> <td style="padding: 5px;">Steel Plate and Mooring Chains</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Weight / Size</td> <td style="padding: 5px;">Advantage of WS VLA Anchor Minimum engineering Anchor adjust to soil cha...</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Certificate</td> <td style="padding: 5px;">ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS</td> </tr> </table> <p style="font-size: small; margin-top: 10px;">We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>	Category	Drag Anchor	Standard	EN	Material	Steel Plate and Mooring Chains	Weight / Size	Advantage of WS VLA Anchor Minimum engineering Anchor adjust to soil cha...	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Category	Drag Anchor										
Standard	EN										
Material	Steel Plate and Mooring Chains										
Weight / Size	Advantage of WS VLA Anchor Minimum engineering Anchor adjust to soil cha...										
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS										

Technical Specifications			
Category	Drag Anchor	Model / SKU	WS-Vertical-Loaded-Ancor-VLA-Ancor
Standard	EN	Material	Steel Plate and Mooring Chains
Weight / Size	Advantage of WS VLA Anchor Minimum engineering Anchor adjust to soil characteristics Light weight, easy to install Safe taut leg mooring.	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China



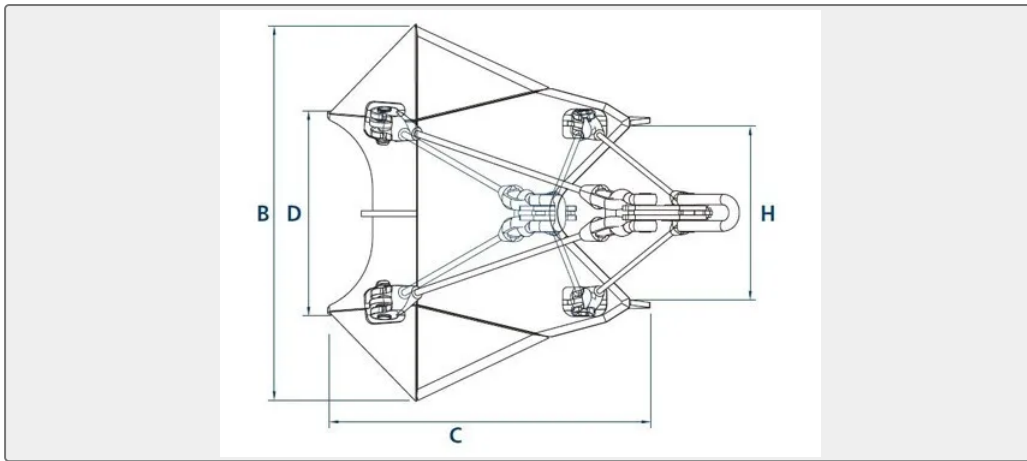

Advantage of WS VLA Anchor

Minimum engineering

Anchor adjust to soil characteristics

Light weight, easy to install

Safe taut leg mooring.