

**AZIMUTH THRUSTERS**

# Well type Azimuth Thruster

It is mounted in the well. The stem length varies with the requirement of the application. The top mounting plate of the well should be above the waterline so that the rudder propeller can be installed and removed whe...

- ISO9001 Supplier
- Class Certificate
- Export Supply



### Key Highlights

Category	Azimuth Thrusters
Standard	DIN
Certificate	ABS,BV,DNV,LR,GL,CCS etc.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


### Technical Specifications

Category	Azimuth Thrusters	Model / SKU	Well-type-Azimuth-Thruster
Standard	DIN	Certificate	ABS,BV,DNV,LR,GL,CCS etc.
Warranty	12 Months unless specified otherwise	Origin	China

**CONTENTS**

- China Well type Azimuth Thruster:
  - Specification
  - Key feature

## China Well type Azimuth Thruster:

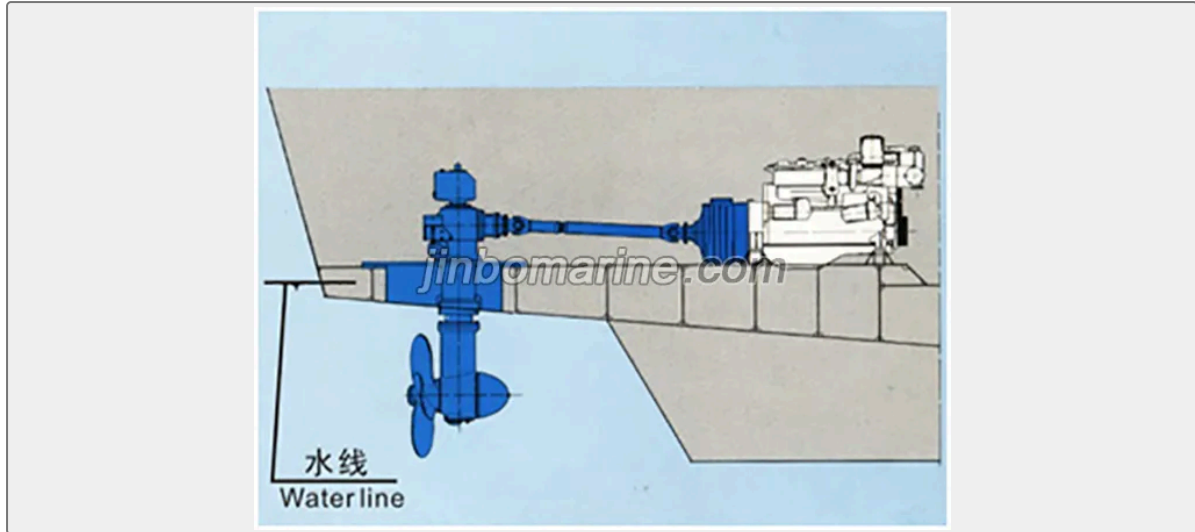

It is mounted in the well. The stem length varies with the requirement of the application. The top mounting plate of the well should be above the waterline so that the rudder propeller can be installed and removed when the ship is floating.

Well installation varies with the distance between the rudder propeller and the diesel engine. When the engine room is very small, the rudder propeller can be near to the diesel engine and suitable for application in long range transmission between diesel engine and rudder propeller.

The well installation is especially for tugs, ferries, well station, floating dock and survey ships. Propeller diameter from 500mm-4200 mm, drive power 20 kw -4500 kw.

## Key feature

Combined design propeller and nozzle together, enlarge diameter of propeller and low down its rotate speed, which keep high propulsion efficiency and enhance thrust force.

Carefully design the rudder-rod profile and its displace from propeller, which improve propulsion efficiency and reduce vibration, especially reduce steering torque.

Adopt high-strength gear and bearing of high speed, seals and pipeline also being carefully design, which improve the system's reliability and longevity.

The steering mechanism can be driven by electrical motor or hydraulic motor.

According to the difference of operation condition, it can be divided into three kind: FPP with nozzle, CPP with nozzle, without nozzle.

In board installation, with the steerable thruster to be mounted from either top or bottom. Jinbo Marine can supply the full propulsion package including prime mover and intermediate shafting.

## Specification

Model	Input power	Input speed	Propeller diameter	Propeller type	Max force
	(kW)	(rpm)	(mm)		(T)
RP	20-150	1500-2500	500/600/700	FPP	3.4
RP	150-250	1500-2350	700/800/900	FPP	2.9



RP	230-480	1200-2350	900/1000/1100	FPP	7.4
RP	420-690	830-1800	1200/1300/1400	FPP/ CPP	11.1
RP	650-980	830-1800	1500/1600/1700	FPP/ CPP	16.1
RP	950-1500	830-1500	1900/2000/2100	FPP/ CPP	24.3
RP	1320-1750	750-1500	2200/2300/2400	FPP/ CPP	29.3
RP	1650-2250	550-1200	2400/2500/2600	FPP/ CPP	36.9
RP	2200-2600	550-1200	2600/2700/2800	FPP/ CPP	42.6
RP	2350-3400	550-1200	2900/3200/3500	FPP/ CPP	58.1
RP	3350-4500	750-1000	3800/4000/4200	FPP/ CPP	79.5