

OTHER MARINE VALVES & ACCESSORIES

XF-B6 Series Limit Valve

XF-B6 Series Limit Valve Principle : Structure Monoblock Port connection Threaded Nominal pressure 25 bar Nominal flow 20 L/min Hydraulic oil temperature range -...

ISO9001 Supplier

Class Certificate

Export Supply



jimbomarine.com

Key Highlights

Category	Other Marine Valves & Accessories
Standard	ISO
Weight / Size	Structure Monoblock Port connection Threaded Nominal pressure 25 bar...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Other Marine Valves & Accessories	Model / SKU	XF-B6-Series-Limit-Valve
Standard	ISO	Weight / Size	Structure Monoblock Port connection Threaded Nominal pressure 25 bar Nominal flow 20 L/min Hydraulic oil temperature range -20 ~ +100°C Viscosity range 10–460 mm²/s Permitted fluid contamination class -/19/16 (ISO 4406:1999) Weight 2.6kg Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China XF-B6 Series Limit Valve:

XF-B6 Series Limit Valve

Principle :

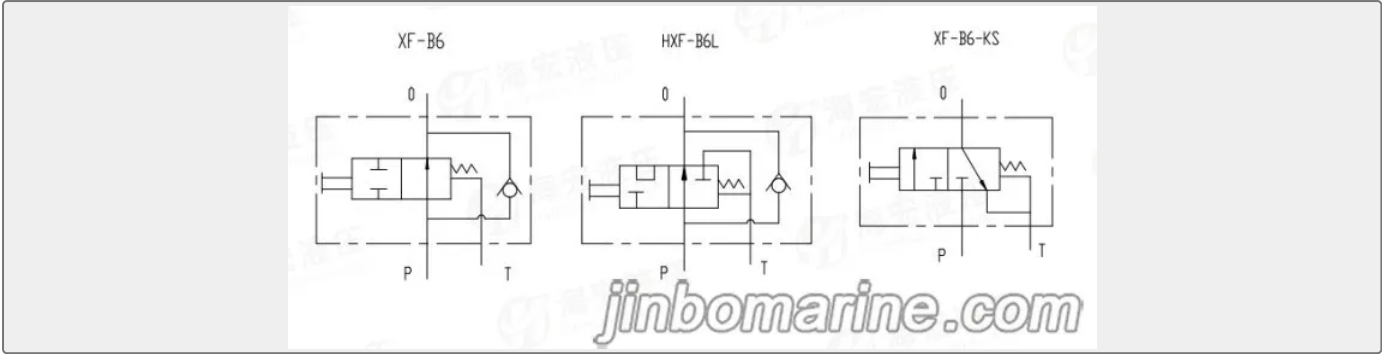

Structure	Monoblock
Port connection	Threaded
Nominal pressure	25 bar
Nominal flow	20 L/min
Hydraulic oil temperature range	-20 ~ +100°C
Viscosity range	10–460 mm²/s
Permitted fluid contamination class	-/19/16 (ISO 4406:1999)
Weight	2.6kg

Size :

