

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## CHAIN SLING

# YDS Swivel Hoist Ring

YDS Swivel Hoist Ring Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate


Export Supply



### Key Highlights

<b>Category</b>	Chain Sling
<b>Standard</b>	EN
<b>Weight / Size</b>	WLL/T M Dimensional Parameters/mm Locking Torque /Nm Kg E A±3 B±3 C D F ...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
<b>Category</b>	Chain Sling	<b>Model / SKU</b>	YDS-Swivel-Hoist-Ring
<b>Standard</b>	EN	<b>Weight / Size</b>	WLL/T M Dimensional Parameters/mm Locking Torque /Nm Kg E A±3 B±3 C D F K±3 H S YDS-M8 0.5 M8x1.25 12 50.5 37 76 14 101.5 49.5 38 8 10-40 0.65 YDS-M10 0.7 M10x1.5 16 50.5 37 76 14 101.5 49.5 38 8 10-40 0.65 YDS-M12 1 M12x1.75 18 50.5 37 76 14 101.5 49.5 38 8 15-40 0.65 YDS-M14 1.5 M14x2.0 21 50.5 3 76 14 101.5 49.5 38 8 30-100 0.66 YDS-M16 2 M16x2.0 24 50.5 37 76 14 101.5 49.5 38 8 45-130 0.67 YDS-M18 2.5 M18x2.5 40 74.5 54 105 20 145 77 48 12 100-170 1.8 YDS-M20 3 M20x2.5 40 74.5 54 105 20 145 77 48 12 100-170 1.8 YDS-M22 3 M22x2.5 40 74.5 54 105 20 145 77 48 12 100-170 1.9 YDS-M24 4.5 M24x3.0 40 74.5 54 105 20 145 77 48 12 190-280 1.9 YDS-M27 5 M27x3.0 40 98.5 73 146 30 201.5 103.5 68 17 250-500 5.3 YDS-M30 7.3 M30x3.5 45 98.5 73 146 30 201.5 103.5 68 17 270- 600 5.3 YDS-M33 8 M33x3.5 50 98.5 73 146 30 201.5 103.5 68 17 270-600 5.3 YDS-M36 10 M36x4.0 54 98.5 73 146 30 201.5 103.5 68 17 270-600 5.4 YDS-M39 10 M39x4.0 58 98.5 73 146 30 201.5 103.5 68 17 350-800 5.6 YDS-M42 12.5 M42x4.5 63 98.5 73 146 30 201.5 103.5 68 17 350-800 5.8
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

## China YDS Swivel Hoist Ring:

YDS Swivel Hoist Ring



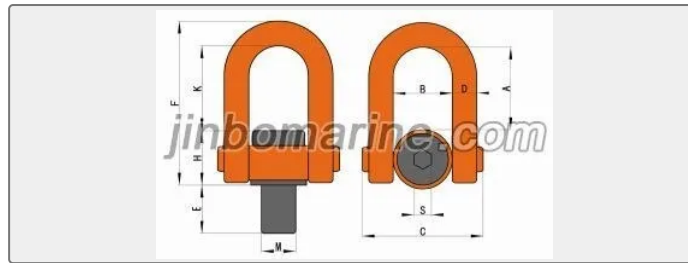

## Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm									Locking Torque /Nm	Kg
			E	A±3	B±3	C	D	F	K±3	H	S		
YDS-M8	0.5	M8x1.25	12	50.5	37	76	14	101.5	49.5	38	8	10-40	0.65
YDS-M10	0.7	M10x1.5	16	50.5	37	76	14	101.5	49.5	38	8	10-40	0.65
YDS-M12	1	M12x1.75	18	50.5	37	76	14	101.5	49.5	38	8	15-40	0.65
YDS-M14	1.5	M14x2.0	21	50.5	37	76	14	101.5	49.5	38	8	30-100	0.66
YDS-M16	2	M16x2.0	24	50.5	37	76	14	101.5	49.5	38	8	45-130	0.67
YDS-M18	2.5	M18x2.5	40	74.5	54	105	20	145	77	48	12	100-170	1.8
YDS-M20	3	M20x2.5	40	74.5	54	105	20	145	77	48	12	100-170	1.8
YDS-M22	3	M22x2.5	40	74.5	54	105	20	145	77	48	12	100-170	1.9
YDS-M24	4.5	M24x3.0	40	74.5	54	105	20	145	77	48	12	190-280	1.9
YDS-M27	5	M27x3.0	40	98.5	73	146	30	201.5	103.5	68	17	250-500	5.3
YDS-M30	7.3	M30x3.5	45	98.5	73	146	30	201.5	103.5	68	17	270-600	5.3
YDS-M33	8	M33x3.5	50	98.5	73	146	30	201.5	103.5	68	17	270-600	5.3
YDS-M36	10	M36x4.0	54	98.5	73	146	30	201.5	103.5	68	17	270-600	5.4
YDS-M39	10	M39x4.0	58	98.5	73	146	30	201.5	103.5	68	17	350-800	5.6
YDS-M42	12.5	M42x4.5	63	98.5	73	146	30	201.5	103.5	68	17	350-800	5.8