

OTHER MARINE VALVES & ACCESSORIES

ZLF25 Series Flow Amplifying Valve

ZLF25 Series Flow Amplifying Valve Principle : Structure Integrated Port Connection Flanged connection,threaded connection Mounting Bolt Torque 79 ~ 102 N·m Weight...

ISO9001 Supplier

Class Certificate

Export Supply



jinbomarine.com

Key Highlights

Category	Other Marine Valves & Accessories
Standard	ISO
Weight / Size	Structure Integrated Port Connection Flanged connection,threaded con...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Other Marine Valves & Accessories	Model / SKU	ZLF25-Series-Flow-Amplifying-Valve
Standard	ISO	Weight / Size	Structure Integrated Port Connection Flanged connection,threaded connection Mounting Bolt Torque 79 ~ 102 N·m Weight 22.4 Kg Nominal pressure 200 bar Nominal Flow 160 L/min Steady-state Output Flow 85 ~ 145 L/min Relief Valve Pressure Setting Range 140 ~ 190 bar Hydraulic Oil Temperature Range -20 ~ +100 °C Viscosity Range 10 ~ 380 mm2/s Permitted Fluid Contamination Class -/19/16 (ISO 4406:1999) Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China ZLF25 Series Flow Amplifying Valve:

ZLF25 Series Flow Amplifying Valve

Principle :

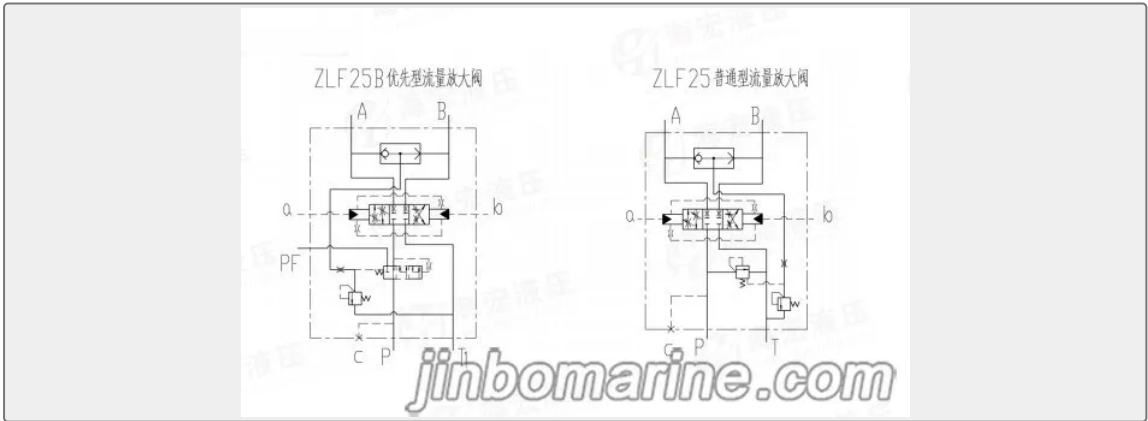

Structure	Integrated
Port Connection	Flanged connection,threaded connection
Mounting Bolt Torque	79 ~ 102 N·m
Weight	22.4 Kg
Nominal pressure	200 bar
Nominal Flow	160 L/min

Steady-state Output Flow	85 ~ 145 L/min
Relief Valve Pressure Setting Range	140 ~ 190 bar
Hydraulic Oil Temperature Range	-20 ~ +100 °C
Viscosity Range	10 ~ 380 mm2/s
Permitted Fluid Contamination Class	-/19/16 (ISO 4406:1999)

Size :

