

MARINE DECK COVERING


A60 Class Floating Deck

Main Specification No. Item name Index Standard 1 Fireproof Deck Covering ...

ISO9001 Supplier

Class Certificate

Export Supply

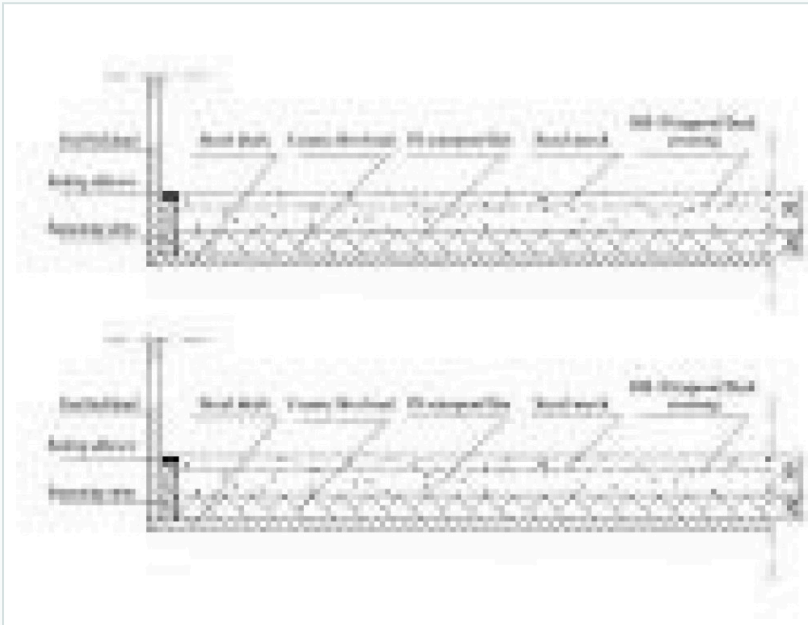

Key Highlights

Category	Marine Deck Covering
Standard	EN
Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Fireproof Deck Covering Initial setting time ...
Certificate	ABS、BV、CCS、DNV、EC、GL、KR、LR、NK

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Deck Covering	Model / SKU	A60-Class-Floating-Deck
Standard	EN	Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Fireproof Deck Covering Initial setting time ≥1h Q/HCF 1-2004 2 Final setting time ≤12h 3 Modulus of rupture ≥4MPa 4 Compressive strength ≥20MPa 5 Density ≤1600kg/m3 6 Water absorption ≤10% 7 Oil absorption ≤5% 8 Heat conductivity ≤1.2W/m.k 9 Non-combustibility In accordance with IMO.FTPC Part 1/IMO.A 799(19) 10 Deck Structure Fire Rating A-60 11 Weight per square meter ≤50 kg/m2/50mm Feature Characteristic:	Certificate	ABS、BV、CCS、DNV、EC、GL、KR、LR、NK
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

■ Main Specification

■ Feature

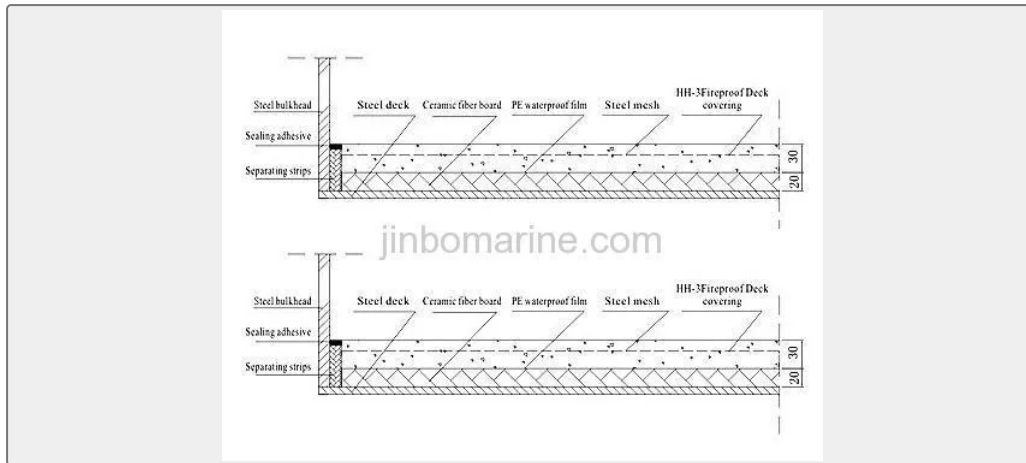

Main Specification

No.	Item name	Index	Standard
1	Fireproof Deck Covering	Initial setting time	Q/HCF 1-2004
2		Final setting time	
3		Modulus of rupture	
4		Compressive strength	
5		Density	
6		Water absorption	
7		Oil absorption	
8		Heat conductivity	
9		Non-combustibility	
10	Deck Structure	Fire Rating	A-60
11		Weight per square meter	

Feature

Characteristic: Vibration resistance, impact resistance, sound absorption, elastic, fire rating is A-60 class

Applied: Covering for A-60 class decks and other approx. A-60 class structures.

Consume amount: 40 kg/m² (HH-3 face layer)

Packing: Dry material (A component): 30kg/pack, supply steel meshes, PE waterproof films and ceramic boards in package counting in areas

Storage: Cool and dry place, moisture-proof, the quality guarantee period is 6 months

Certificate: ABS、BV、CCS、DNV、EC、GL、KR、LR、NK