

MARINE LADDER

Aluminum Accommodation Ladder

Standard: ISO5488 & GB/T14360-1993 The entire accommodation ladder system mainly includes the ladder, the upper platform, the lower platform, the post, the safety net, the turning device, the close device, winc...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

|               |                                                                             |
|---------------|-----------------------------------------------------------------------------|
| Category      | Marine Ladder                                                               |
| Standard      | ISO                                                                         |
| Material      | Aluminum Alloy                                                              |
| Weight / Size | Light weight, High intensity 2.With fixed arc steps, and withanti-skidsl... |
| Certificate   | CCS,DNV,GL, LR, ABS, BV, NK,KR,RINA                                         |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

|               |                                                                                                         |             |                                                                                                         |
|---------------|---------------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------|
| Category      | Marine Ladder                                                                                           | Model / SKU | Aluminum-Accommodation-Ladder                                                                           |
| Standard      | ISO                                                                                                     | Material    | Aluminum Alloy                                                                                          |
| Weight / Size | Light weight, High intensity 2.With fixed arc steps, and withanti-skidslot on the surface of the steps. | Surface     | Light weight, High intensity 2.With fixed arc steps, and withanti-skidslot on the surface of the steps. |
| Certificate   | CCS,DNV,GL, LR, ABS, BV, NK,KR,RINA                                                                     | Warranty    | 12 Months unless specified otherwise                                                                    |
| Origin        | China                                                                                                   |             |                                                                                                         |

CONTENTS

- China Aluminum Accommodation Ladder:  
■ Main Size List(mm):
- Aluminum Accommodation Ladder Feature:

## Aluminum Accommodation Ladder Drawing

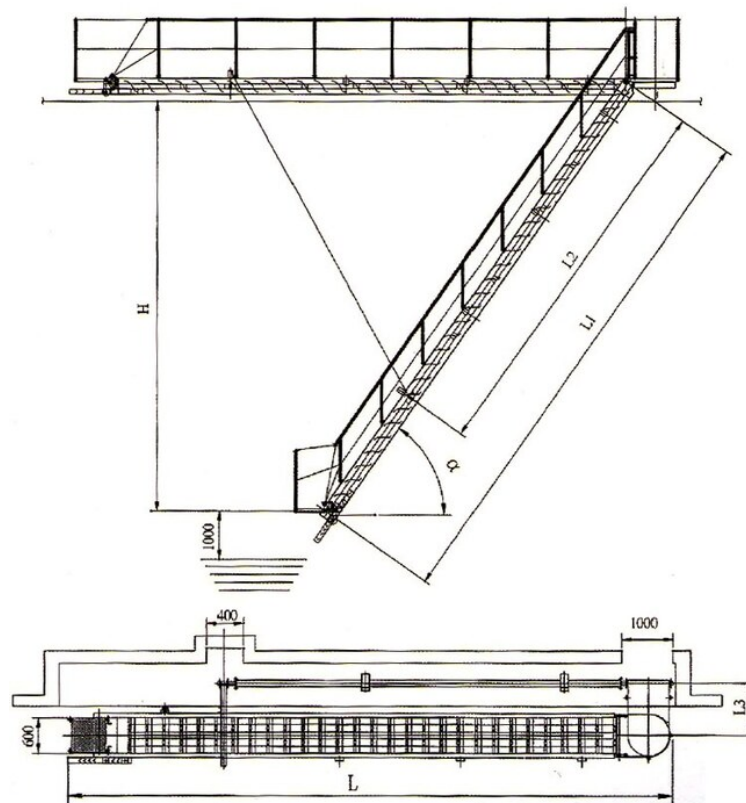

## China Aluminum Accommodation Ladder:

Standard: ISO5488 & GB/T14360-1993

The entire accommodation ladder system mainly includes the ladder, the upper platform, the lower platform, the post, the safety net, the turning device, the close device, winch (electric winch or pneumatic winch)

## Aluminum Accommodation Ladder Feature:

1. Light weight, High intensity
2. With fixed arc steps, and with anti-skid slot on the surface of the steps.
3. The whole ladder is with anodic oxidation treatment, with good corrosion resistance
4. The ladder can be designed as vertical flip type, flat place type and telescopic type

## Main Size List(mm):

| No of Step | L | L1 | L2 | L3 | Max Height(H) | Step Space | Max use Angle |
|------------|---|----|----|----|---------------|------------|---------------|
|------------|---|----|----|----|---------------|------------|---------------|

|    |       |       |                     |          |       |           |          |
|----|-------|-------|---------------------|----------|-------|-----------|----------|
| 12 | 5600  | 3600  | Decided when design | 850-2000 | 3620  | 300-(350) | 55°(60°) |
| 14 | 6200  | 4200  |                     |          | 4100  |           |          |
| 16 | 6800  | 4800  |                     |          | 4590  |           |          |
| 18 | 7400  | 5400  |                     |          | 5080  |           |          |
| 20 | 8000  | 6000  |                     |          | 5800  |           |          |
| 22 | 8600  | 6600  |                     |          | 6300  |           |          |
| 24 | 9200  | 7200  |                     |          | 6800  |           |          |
| 26 | 9800  | 7800  |                     |          | 7300  |           |          |
| 28 | 10400 | 8400  |                     |          | 7800  |           |          |
| 30 | 11000 | 9000  |                     |          | 8300  |           |          |
| 32 | 11600 | 9600  |                     |          | 8800  |           |          |
| 34 | 12200 | 10200 |                     |          | 9300  |           |          |
| 36 | 12800 | 10800 |                     |          | 9800  |           |          |
| 38 | 13400 | 11400 |                     |          | 10300 |           |          |
| 40 | 14000 | 12000 |                     |          | 10800 |           |          |
| 42 | 14600 | 12600 |                     |          | 11300 |           |          |
| 44 | 15200 | 13200 |                     |          | 11800 |           |          |
| 46 | 15800 | 13800 |                     |          | 12300 |           |          |
| 48 | 16400 | 14400 |                     |          | 12800 |           |          |
| 50 | 17000 | 15000 |                     |          | 13300 |           |          |
| 52 | 17600 | 15600 |                     |          | 13800 |           |          |
| 54 | 18200 | 16200 |                     |          | 14300 |           |          |
| 56 | 18800 | 16800 |                     |          | 14700 |           |          |
| 58 | 19400 | 17400 |                     |          | 15100 |           |          |
| 62 | 20600 | 18600 |                     |          | 15500 |           |          |
| 66 | 21800 | 19800 |                     |          | 15900 |           |          |
| 70 | 23000 | 21000 |                     |          | 16300 |           |          |

\* The length is customerized. The size in the list is just for reference.