

MARINE COMMUNICATION AND NAVIGATION EQUIPMENT

ISO9001 Supplier

Class Certificate

Export Supply

Automatic Battery Charger

Automatic Battery Charger Feature 1. Microcomputer system control 2. Short-circuit Protection 3. Overload Protection 4. The limit of Voltage and current can be manually adjusted. 5. Acutal w...



Key Highlights

Category	Marine Communication And Navigation Equipment
Standard	EN
Weight / Size	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Communication And Navigation Equipment	Model / SKU	Automatic-Battery-Charger
Standard	EN	Weight / Size	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage AC180-260V Efficiency >80% Battery Type Lead Acid Battery Cuurent Range 0-42A 0-50A 0-80A Voltage Range 27.5-31V Working Temparature -10-70 Degree C Storage Temperature -40-80 Degree C Relative Humidity <=85%
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

Automatic Battery Charger Feature

- 1. Microcomputer system control
- 2. Short-circuit Protection
- 3. Overload Protection
- 4. The limit of Voltage and current can be manually adjusted.
- 5. Acutal working voltage and current display in digital monitor during the charging.
- 6. Portbale and Powerful.
- 7. Elegant Appearance and Easy Operation.
- 8. Applied to 24V DC Storage Battery.

Automatic Battery Charger Size

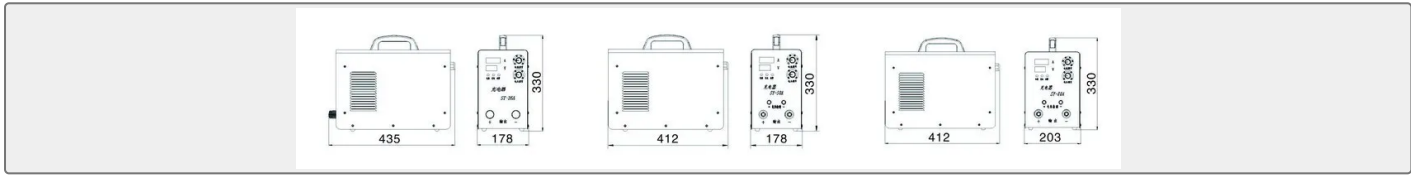

MODEL	SY-35A		SY-50A	SY-80A
Input Voltage	AC180-260V			
Efficiency	>80%			
Battery Type	Lead Acid Battery			
Cuurent Range	0-42A		0-50A	0-80A
Voltage Range	27.5-31V			
Working Temparature	-10-70 Degree C			
Storage Temperature	-40-80 Degree C			
Relative Humidity	<=85%			