

CHAIN SLING

ISO9001 Supplier

Class Certificate

Export Supply

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate 1.BLT084 is equipped with a locking wrench, and BLT094 is equipped with a stop screw, which can be easily installed after being locked, and the lifting ring can...



Key Highlights

Category	Chain Sling
Standard	DIN
Material	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel ...
Weight / Size	2.4 times safety factor Different loads can be lifted in different direc...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications			
Category	Chain Sling	Model / SKU	BLT084-Eye-Type-Rotary-Ring-Unc-Thread-With-Stopplate
Standard	DIN	Material	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.
Weight / Size	2.4 times safety factor Different loads can be lifted in different directions, but 4 times safety factor is guaranteed 3.Complete specifications The thread specifications are complete, the rated load range is wide (M8-M48, 0.32T-32T), and the thread size can be customized according to customer requirements.	Surface	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	■ BLT084 Eye Type Rotary Ring Unc Thread With Stopplate	■ BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Drawing
	■ BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Parameters	

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate

- 1.BLT084 is equipped with a locking wrench, and BLT094 is equipped with a stop screw, which can be easily installed after being locked, and the lifting ring can be rotated after loosening.
- 2.4 times safety factor
Different loads can be lifted in different directions, but 4 times safety factor is guaranteed
- 3.Complete specifications
The thread specifications are complete, the rated load range is wide (M8-M48, 0.32T-32T), and the thread size can be customized according to customer requirements.
- 4.Alloy steel, electrostatic spraying
The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Drawing

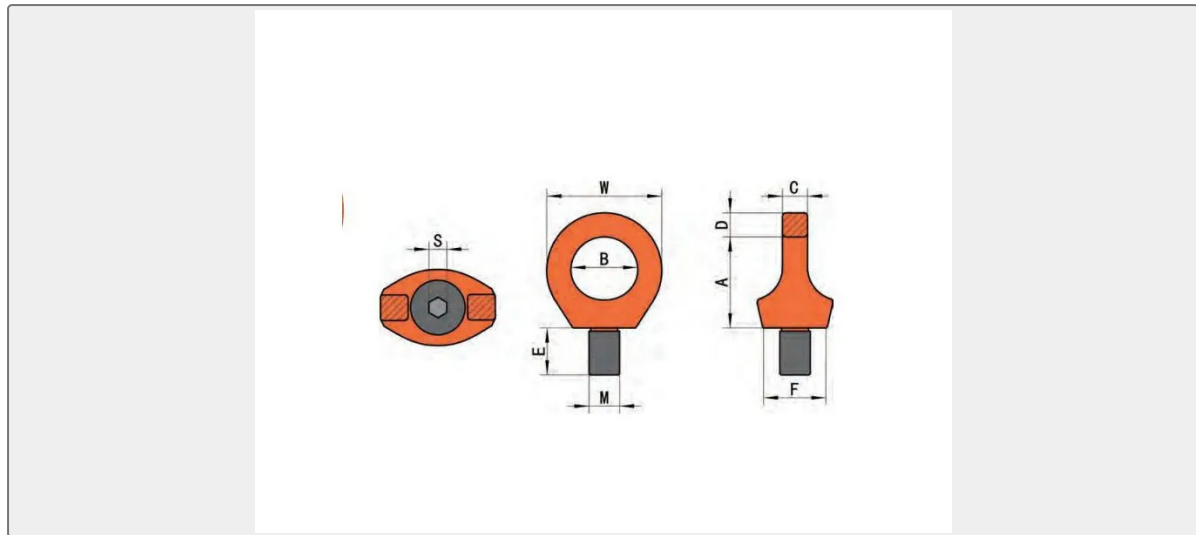

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Parameters

ITEM NO.	WLL/T		TPI	WEIGHT /KG
	X	(Z)		
BLT084-5/16	0.3	(1)	5/16-18UNC	0.2
BLT084-3/8	0.4	(1)	3/8-16UNC	0.2
BLT084-7/16	0.75	(2)	7/16-14UNC	0.3
BLT084-1/2	0.75	(2)	1/2-13UNC	0.3
BLT084-5/8	1.5	(4)	5/8-11UNC	0.5
BLT084-3/4	2.3	(6)	3/4-10UNC	0.7
BLT084-7/8	2.3	(6)	7/8-9UNC	0.8
BLT084-1	3.2	(8)	1-8UNC	1.2
BLT084-1 1/4	4.5	(12)	1 1/4-7UNC	2.2
BLT084-1 1/2	9	(24)	1 1/2-6UNC	6.5
BLT084-1 3/4	12	(32)	1 3/4-5UNC	10
ITEM NO.	TECHNICAL PARAMETERS/MM			
	E	A	B	C
BLT084-5/16	12	35	25	8.5
BLT084-3/8	15	35	25	8.5
BLT084-7/16	18	42	30	10
BLT084-1/2	18	42	30	10
BLT084-5/8	24	50	35	16
BLT084-3/4	30	58	40	16

BLT084-7/8	30	58	40	16
BLT084-1	36	72.5	48	19
BLT084-1 1/4	45	88.5	60	25
BLT084-1 1/2	63	121.5	82	37
BLT084-1 3/4	72	138.5	94	42
ITEM NO.	TECHNICAL PARAMETERS/MM			
	D	F	S	W
BLT084-5/16	11	28	6.5	47
BLT084-3/8	11	28	6.5	47
BLT084-7/16	13	34	8.5	56
BLT084-1/2	13	34	8.5	56
BLT084-5/8	15	42	10.5	65
BLT084-3/4	17.5	50	12.5	75
BLT084-7/8	17.5	50	12.5	75
BLT084-1	21	61	14.5	90
BLT084-1 1/4	26	74	17.5	112
BLT084-1 1/2	28	106	24.5	158
BLT084-1 3/4	43	124	27.5	180