

JIS NEEDLE VALVE

Brass Needle Angle Valve with Corrugated Hose End & Male Thread

- ISO9001 Supplier
- Class Certificate
- Export Supply

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings. Technical Specification: ...



Key Highlights

| | |
|---------------|--|
| Category | JIS Needle Valve |
| Standard | EN |
| Material | Brass |
| Weight / Size | 1.47Mpa (15kgf/cm2) 3. |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

| | | | |
|---------------|--------------------------------------|-------------|---|
| Category | JIS Needle Valve | Model / SKU | Brass-Needle-Angle-Valve-with-Corrugated-Hose-End-Male-Thread |
| Standard | EN | Material | Brass |
| Weight / Size | 1.47Mpa (15kgf/cm2) 3. | Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| Warranty | 12 Months unless specified otherwise | Origin | China |

CONTENTS

- China Brass Needle Angle Valve with Corrugated Hose End & Male Thread:
- Main Size:
- Technical Specification:

China Brass Needle Angle Valve with Corrugated Hose End & Male Thread:

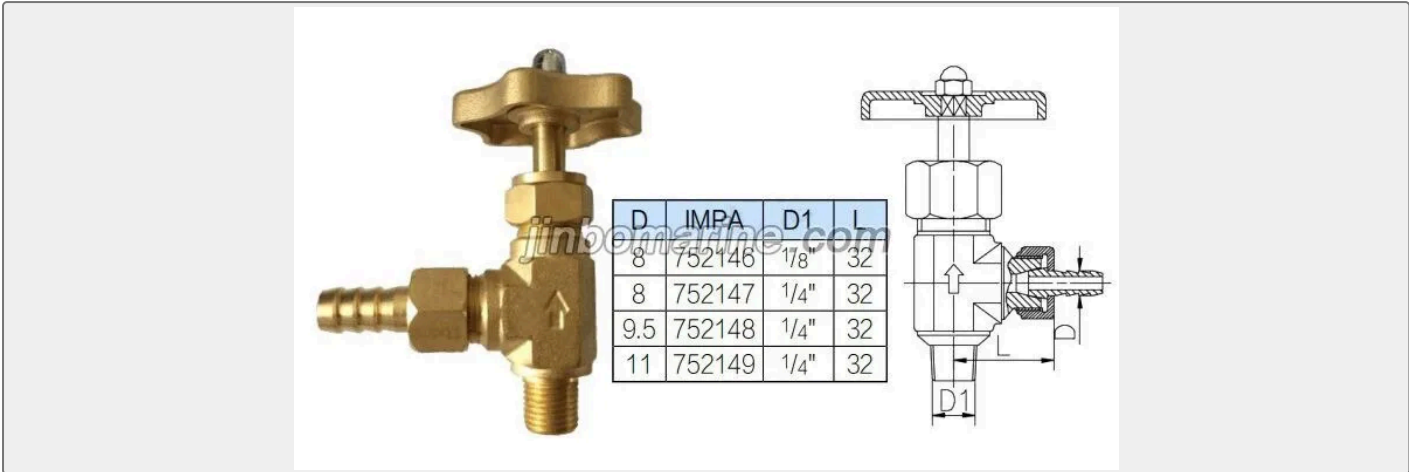

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings.

Technical Specification:

1. Applicable temperature will be -20°C to 100°C
2. Max Pressure: 1.47Mpa (15kgf/cm²)
3. Recommended for use at less than 80% of max load pressure at temperature between 80°C and 100°C.

Main Size:

| IMPA | Nominal Size | OD of Tube | Thread | | Length | Height |
|--------|--------------|------------|-----------------|-------------|--------|--------|
| | | | Ring Joint Side | Male Thread | | |
| 752146 | 8 x 1/8 | 8 | PF-1/4 | PT-1/8 | 55 | 46 |
| 752147 | 8 x 1/4 | 8 | PF-1/4 | PT-1/4 | 58 | 46 |
| 752148 | 9.5 x 1/4 | 9.5 | PF-3/8 | PT-1/4 | 65 | 54 |
| 752149 | 11 x 1/4 | 11 | PF-3/8 | PT-1/4 | 65 | 56 |