

LIFEBOAT AND RESCUE BOAT ACCESSORIES


CD4212-2 Lifeboat Battery Charger

The charger is specially designed for maintenance charging of batteries used in lifeboats.
Supply voltage: 42V/AC 50/60HZ Fully Charged voltage: 14.4VDC Complementary voltage: 13.3VDC Charing cur...

ISO9001 Supplier

Class Certificate

Export Supply

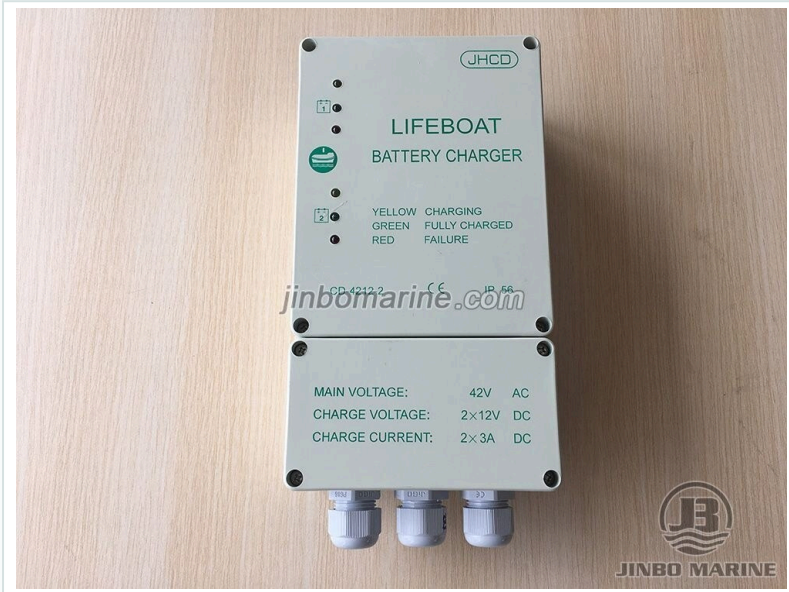

Key Highlights

Category	Lifeboat And Rescue Boat Accessories
Standard	EN
Weight / Size	13.3VDC Charing current:≤3A(2 pieces of batteries) Dimension:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Lifeboat And Rescue Boat Accessories	Model / SKU	CD4212-2-Lifeboat-Battery-Charger
Standard	EN	Weight / Size	13.3VDC Charing current:≤3A(2 pieces of batteries) Dimension:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China CD4212-2 Lifeboat Battery Charger:

The charger is specially designed for maintenance charging of batteries used in lifeboats.

Supply voltage: 42V/AC 50/60HZ

Fully Charged voltage: 14.4VDC

Complementary voltage: 13.3VDC

Charing current:≤3A(2 pieces of batteries)

Dimension: 243x134x80mm

Weight:5kgs

Protection grade:IP56

Temperature:-25 to 55 centigrade.

Use Method: Connect in proper order, connect the battery, then connect the power source : 42C/AC

