

MARINE AIR CONDITIONER

CFP-WAB Super Thin Horizontal Hidden Type Fan Coil

Descroption: CFP-BGM,WAB,ZH fan coil has new design, beautiful appearance, simple installation, convenient operation, low noise, small volume and save energy etc. which is suitable for medium and small siz...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Air Conditioner
Standard	EN
Weight / Size	which is suitable for medium and small sized navy, such as suppress smug...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Marine Air Conditioner	Model / SKU	CFP-WAB-Super-Thin-Horizontal-Hidden-Type-Fan-Coil
Standard	EN	Weight / Size	which is suitable for medium and small sized navy, such as suppress smuggling boat, patrol boat and luxurious yacht etc.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

■ Descroption:

■ Technical Data:

Description:

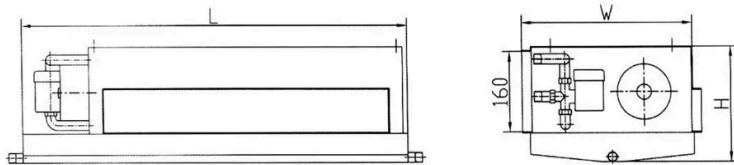

CFP-BGM,WAB,ZH fan coil has new design, beautiful appearance, simple installation, convenient operation, low noise, small volume and save energy etc. which is suitable for medium and small sized navy, such as suppress smuggling boat, patrol boat and luxurious yacht etc.

Technical Data:

Type		CFP-7.0WAB	CFP-10WAB	CFP-12WAB	CFP-16WAB	CFP-24WAB	CFP-30WAB
Cooling capacity	Kw	2	3	3.5	4.7	7	8.8
	Btu/hr	7000	10000	12000	16000	24000	30000
Heating capacity	Kw	2.2	3.3	3.85	5.17	7.7	9.7
	Btu/hr	7500	11000	13000	17600	26000	33000
Air flow	high m3/h	350	500	630	800	1400	1600
	mid m3/h	300	400	505	640	1140	1280
	low m3/h	210	300	380	480	890	980
Water flow m3/h		370	520	650	830	1400	1550
Diameter of Inlet/outlet		RC1/2 thread or DN 15 hose			RC3/4 thread or DN 20 hose		
Power supply		220V 50Hz 1Φ					
Total Power W		40	40	40	70	135	145
Current A		0.35	0.4	0.4	0.9	1.1	1.2
Dimension	L mm	650	800	990	1090	1150	1360
	W mm	350	350	350	350	350	350
	H mm	230	230	230	230	230	230
Weight kg		15	17	19	21	28	32