

CENTRIFUGAL PUMP

CISG Single Stage Single Suction
Marine Pipeline Centrifugal Pump

Description: Installation: Type Q (m3/h) Head (m) Speed (r/min) Power (kw) ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Centrifugal Pump
Standard	EN
Weight / Size	Type Q (m3/h) Head (m) Speed (r/min) Power (kw) Weight (kg) CISG15-80 1....
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications			
Category	Centrifugal Pump	Model / SKU	CISG-single-stage-single-suction-marine-pipeline-centrifugal-pump
Standard	EN	Weight / Size	Type Q (m3/h) Head (m) Speed (r/min) Power (kw) Weight (kg) CISG15-80 1.1 8.5 2800 0.18 17 CISG20-110 1.8 16 2800 0.37 25 CISG20-160 1.8 33 2900 0.75 29 CISG25-110 2.8 16 2900 0.55 26 CISG25-125 2.8 20.6 2900 0.75 28 CISG25-125A 2.5 17 2900 0.55 27 CISG25-160 2.8 33 2900 1.5 39 CISG25-160A 2.6 29 2900 1.1 34 32-100(1) 4.4 28 2900 0.75 32 32-125 3.5 13.2 2900 0.75 28 32-125A 3.1 22 2900 0.55 28 32-160 4.4 17.6 2900 1.5 39 32-160A 2.8 33.2 2900 1.1 38 32-160(1) 4.4 29 2900 2.2 47 32-200(1) 3.9 33.2 2900 4 43 32-200(1)A 4.4 50.5 2900 2.2 37 40-100 3.9 44.6 2900 0.55 32 40-100A 3.9 13.2 2900 0.37 32 40-125 4.4 10.6 2900 1.1 34 40-125A 3.9 21 2900 0.75 33 40-160 4.4 17.6 2900 2.2 47 40-160A 4.1 32 2900 1.5 43 40-160B 3.8 29 2900 1.1 38 40-200 4.4 25.5 2900 5.5 74 40-200A 4.1 51 2900 4 62 40-200B 3.7 45 2900 3 52 40-250 4.4 38 2900 7.5 105 40-250A 4.1 82 2900 5.5 98 40-250B 3.8 72 2900 4 77 Other model:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	■ Description: ■ Other model:	■ Installation:
----------	---	----------------------------

Description:

	CISG 100-160 (I) A (B) 叶轮经第二次切割 Impeller is cut for the 2 time[™] 叶轮经第一次切割 Impeller is cut for the 1 time[™] 流量分类 Classification of flow 叶轮名义外径 Nominal outer diameter of impeller (mm) 泵进、出口公称直径 Nominal diameters of pump inlet and outlet(mm) 单级单吸船用管道离心泵 CISG single stage single suction marine pump	
--	---	--

Installation:

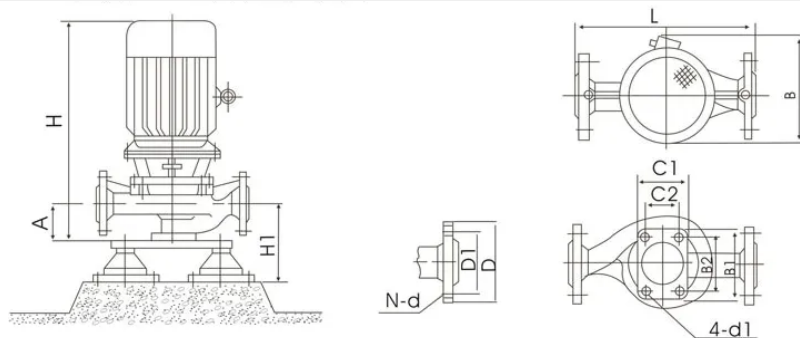

Type	Q (m ³ /h)	Head (m)	Speed (r/min)	Power (kw)	Weight (kg)
CISG15-80	1.1	8.5	2800	0.18	17
CISG20-110	1.8	16	2800	0.37	25
CISG20-160	1.8	33	2900	0.75	29
CISG25-110	2.8	16	2900	0.55	26
CISG25-125	2.8	20.6	2900	0.75	28
CISG25-125A	2.5	17	2900	0.55	27
CISG25-160	2.8	33	2900	1.5	39
CISG25-160A	2.6	29	2900	1.1	34
32-100(1)	4.4	28	2900	0.75	32
32-125	3.5	13.2	2900	0.75	28
32-125A	3.1	22	2900	0.55	28
32-160	4.4	17.6	2900	1.5	39
32-160A	2.8	33.2	2900	1.1	38
32-160(1)	4.4	29	2900	2.2	47
32-200(1)	3.9	33.2	2900	4	43
32-200(1)A	4.4	50.5	2900	2.2	37
40-100	3.9	44.6	2900	0.55	32
40-100A	3.9	13.2	2900	0.37	32
40-125	4.4	10.6	2900	1.1	34
40-125A	3.9	21	2900	0.75	33
40-160	4.4	17.6	2900	2.2	47
40-160A	4.1	32	2900	1.5	43
40-160B	3.8	29	2900	1.1	38
40-200	4.4	25.5	2900	5.5	74

40-200A	4.1	51	2900	4	62
40-200B	3.7	45	2900	3	52
40-250	4.4	38	2900	7.5	105
40-250A	4.1	82	2900	5.5	98
40-250B	3.8	72	2900	4	77

Other model:

CISG的主要性能参数与安装尺寸表(二) Main performance parameter and installation size table of CISG(two)														
型号 Type	流量Q [m ³ /h]	扬程H [m]	功率P [kW]	转速n [r/min]	电机功率 [kW]	外形尺寸 Shape dimension				安装尺寸 Installation dimension				总重量 [kg]
						L	B	H	C ₁ ×B ₁	A	C ₂ ×B ₂	4-d	D	H-d
40-100(I)	1.1	2.3	34	300	230	455	124	173	85	84	103	4-φ14	φ10	4-φ18
40-100(I)A	0.75	2.3	32	300	230	455	124	173	85	84	103	4-φ14	φ10	4-φ18
40-125(I)	1.5	2.3	38	300	240	465	124	173	85	84	103	4-φ14	φ10	4-φ18
40-125(I)A	1.1	2.3	33	300	240	450	124	173	85	84	103	4-φ14	φ10	4-φ18
40-160(I)	3	2.3	56	340	300	550	124	173	85	84	103	4-φ14	φ10	4-φ18
40-160(I)A	2.2	2.3	47	340	300	515	124	173	85	84	103	4-φ14	φ10	4-φ18
40-160(I)B	1.5	2.3	43	340	300	490	124	173	85	84	103	4-φ14	φ10	4-φ18
40-200(I)	5.5	2.3	85	360	350	630	124	173	85	84	103	4-φ14	φ10	4-φ18
40-200(I)A	4	2.3	75	360	350	570	124	173	85	84	103	4-φ14	φ10	4-φ18
40-200(I)B	3	2.3	63	360	350	550	124	173	85	84	103	4-φ14	φ10	4-φ18
40-250(I)	11	2.3	145	440	430	780	142	200	105	105	103	4-φ18	φ10	4-φ18
40-250(I)A	7.5	2.3	95	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18
40-250(I)B	7.5	2.3	94	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18
40-250(I)C	5.5	2.3	85	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18
50-100	1.1	2.3	36	320	230	455	101	151	85	74	103	4-φ14	φ10	4-φ18
50-100A	0.75	2.3	35	320	230	455	101	151	85	74	103	4-φ14	φ10	4-φ18
50-125	1.5	2.3	43	360	240	465	101	151	85	84	103	4-φ14	φ10	4-φ18
50-125A	1.1	2.3	38	360	240	450	101	151	85	84	103	4-φ14	φ10	4-φ18
50-160	3	2.3	59	320	300	550	124	173	100	84	103	4-φ14	φ10	4-φ18
50-160A	2.2	2.3	51	320	300	515	124	173	100	84	103	4-φ14	φ10	4-φ18
50-160B	1.5	2.3	47	320	300	490	124	173	100	84	103	4-φ14	φ10	4-φ18
50-200	5.5	2.3	101	360	350	630	124	173	100	84	103	4-φ14	φ10	4-φ18
50-200A	4	2.3	88	360	350	570	124	173	100	84	103	4-φ14	φ10	4-φ18
50-200B	3	2.3	88	360	350	550	124	173	100	84	103	4-φ14	φ10	4-φ18
50-250	11	2.3	160	440	430	780	142	200	105	105	103	4-φ18	φ10	4-φ18
50-250A	7.5	2.3	115	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18
50-250B	7.5	2.3	114	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18
50-250C	5.5	2.3	106	440	360	650	142	200	105	105	103	4-φ18	φ10	4-φ18

CISG的主要性能参数与安装尺寸表(三) Main performance parameter and installation size table of CISG(three)														
型号 Type	流量Q [m ³ /h]	扬程H [m]	功率P [kW]	转速n [r/min]	电机功率 [kW]	外形尺寸 Shape dimension				安装尺寸 Installation dimension				总重量 [kg]
						L	B	H	C ₁ ×B ₁	A	C ₂ ×B ₂	4-d	D	H-d
50-100(I)	1.1	2.5	41	320	235	475	141	200	105	105	103	4-φ16	φ125	4-φ18
50-100(I)A	1.1	2.5	36	320	235	460	141	200	105	105	103	4-φ16	φ125	4-φ18
50-125(I)	3	2.5	58	340	280	550	141	200	105	105	103	4-φ16	φ125	4-φ18
50-125(I)A	2.2	2.5	48	340	280	515	141	200	105	105	103	4-φ16	φ125	4-φ18
50-160(I)	4	2.5	72	360	305	570	141	200	100	100	103	4-φ16	φ125	4-φ18
50-160(I)A	4	2.5	71	360	305	570	141	200	100	100	103	4-φ16	φ125	4-φ18
50-160(I)B	3	2.5	59	360	305	550	141	200	100	100	103	4-φ16	φ125	4-φ18
50-200(I)	7.5	2.5	108	380	350	630	141	200	105	105	103	4-φ16	φ125	4-φ18
50-200(I)A	7.5	2.5	107	380	350	630	141	200	105	105	103	4-φ16	φ125	4-φ18
50-200(I)B	5.5	2.5	100	380	350	630	141	200	105	105	103	4-φ16	φ125	4-φ18
50-250(I)	15	2.5	175	480	435	785	161	220	110	134	103	4-φ16	φ125	4-φ18
50-250(I)A	11	2.5	165	480	435	785	161	220	110	134	103	4-φ16	φ125	4-φ18
50-250(I)B	11	2.5	165	480	435	785	161	220	110	134	103	4-φ16	φ125	4-φ18
50-315(I)	30	2.5	310	550	510	920	161	220	110	134	103	4-φ16	φ125	4-φ18
50-315(I)A	22	2.5	245	550	470	855	161	220	110	134	103	4-φ16	φ125	4-φ18
50-315(I)B	18.5	2.5	215	550	435	830	161	220	110	134	103	4-φ16	φ125	4-φ18
50-315(I)C	15	2.5	195	550	435	785	161	220	110	134	103	4-φ16	φ125	4-φ18
65-100	1.1	2.5	41	320	235	475	141	200	105	105	103	4-φ16	φ145	4-φ18
65-100A	1.1	2.5	41	320	235	460	141	200	105	105	103	4-φ16	φ145	4-φ18
65-125	3	2.5	58	340	280	550	141	200	100	100	103	4-φ16	φ145	4-φ18
65-125A	2.2	2.5	49	340	280	515	141	200	100	100	103	4-φ16	φ145	4-φ18
65-160	4	2.5	75	360	305	570	141	200	100	100	103	4-φ16	φ145	4-φ18
65-160A	4	2.5	75	360	305	570	141	200	100	100	103	4-φ16	φ145	4-φ18
65-160B	3	2.5	63	360	305	550	141	200	100	100	103	4-φ16	φ145	4-φ18
65-200	7.5	2.5	107	380	350	630	141	200	105	105	103	4-φ16	φ145	4-φ18
65-200A	7.5	2.5	107	380	350	630	141	200	105	105	103	4-φ16	φ145	4-φ18
65-200B	5.5	2.5	100	380	350	630	141	200	105	105	103	4-φ16	φ145	4-φ18
65-250	15	2.5	180	480	435	785	161	220	110	134	103	4-φ16	φ145	4-φ18

CISG型高主要性能参数与安装尺寸表(旧)

Main performance parameter and installation size table of CISG(foe)

型号 Type	流量Q Flow [m³/h]	扬程H Head [m]	功率P Power [kW]	电压U Voltage [V]	外形尺寸 Shape dimension	安装尺寸 Installation dimension				进出口法兰尺寸 Inlet and outlet flange size				重量 Weight [kg]			
						L	B	H	C ₁ ×B ₁	A	C ₂ ×B ₂	4-d ₁	D		D ₂	n-d	规格Size
65-250A	250	11	2.5	170	480/435	765	160	220	110	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-250B	250	11	2.5	170	480/435	765	160	220	110	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-315	320	22	3.0	330	550/510	835	160	220	120	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-315A	315	22	2.5	330	550/510	835	160	220	120	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-315B	315	22	2.5	330	550/510	835	160	220	120	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-315C	315	22	2.5	330	550/510	835	160	220	120	130	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	210
65-1000I	1000	3	3.0	63	400/285	575	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1000IIA	1000	3	2.2	3.0	63	400/285	575	140	200	120	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1250I	1250	5.5	3.0	99	400/360	685	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1250IIA	1250	5.5	3.0	99	400/360	685	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1600I	1600	7.5	3.0	163	400/360	885	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1600IIA	1600	7.5	3.0	163	400/360	885	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-1600IIB	1600	7.5	3.0	163	400/360	885	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
65-2000I	2000	15	3.0	176	450/430	765	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	225
65-2000IIA	2000	15	3.0	176	450/430	765	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	225
65-2000IIB	2000	15	3.0	176	450/430	765	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	225
65-2500I	2500	22	3.0	235	480/460	875	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-2500IIA	2500	22	3.0	235	480/460	875	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-2500IIB	2500	22	3.0	235	480/460	875	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-3150I	3150	30	3.0	330	550/530	1035	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-3150IIA	3150	30	3.0	330	550/530	1035	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-3150IIB	3150	30	3.0	330	550/530	1035	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
65-3150IIC	3150	30	3.0	330	550/530	1035	160	220	130	160	160	4-Φ18	Φ165	Φ165	4-Φ18	J020-3	230
80-100	100	3	3.0	63	400/285	575	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
80-100A	100	3	3.0	63	400/285	575	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
80-125	125	5.5	3.0	99	400/360	685	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
80-125A	125	5.5	3.0	99	400/360	685	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140
80-160	160	7.5	3.0	163	400/360	885	140	200	120	160	160	4-Φ18	Φ165	Φ165	4-Φ18	S061-0.5	140