

MARINE KITCHEN GALLEY

DZG-60Q Marine Tilting Pot

DZG-60Q Marine Tilting Pot 1. All stainless steel structure 2. Three-layer design of the pot body 3. The pot cover adopts one-piece type, which is easy to operate 4. The hand wheel is driven by a turbine rod to ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Kitchen Galley
Standard	EN
Material	SS
Weight / Size	The base form is suitable for installation and fixation on ships DZG-60Q...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications			
Category	Marine Kitchen Galley	Model / SKU	DZG-60Q-Marine-Tilting-Pot
Standard	EN	Material	SS
Weight / Size	The base form is suitable for installation and fixation on ships DZG-60Q Marine Tilting Pot Drawing DZG-60Q Marine Tilting Pot Parameters Model DZG-40Q DZG-60Q DZG-80Q Model DZG-100Q DZG-120Q 40MTLC Volume(L) 40 60 80 Volume(L) 100 120 40 Voltage 380/415V-3PH-50Hz 440/480v 3ph-60Hz Voltage 380/415V-3PH-50Hz 440/480v 3ph-60Hz Power(kw) 9 13.5 13.5 Power(kw) 13.5 18 9 Size(mm) 930X700X930 930X700X980 980X730X980 Size(mm) 1030X800X90 1080X920X980 800X700X850 Weight(kg) 120 130 150 Weight(kg) 170 250 100	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ DZG-60Q Marine Tilting Pot ■ DZG-60Q Marine Tilting Pot Parameters	■ DZG-60Q Marine Tilting Pot Drawing
----------	--	--

DZG-60Q Marine Tilting Pot

1. All stainless steel structure
2. Three-layer design of the pot body
3. The pot cover adopts one-piece type, which is easy to operate
4. The hand wheel is driven by a turbine rod to drive the tilting pan
5. Turbine worm drive tilting pan, optional handwheel or electric
6. Equipped with pressure gauge and imported safety relief valve
7. The base form is suitable for installation and fixation on ships

DZG-60Q Marine Tilting Pot Drawing

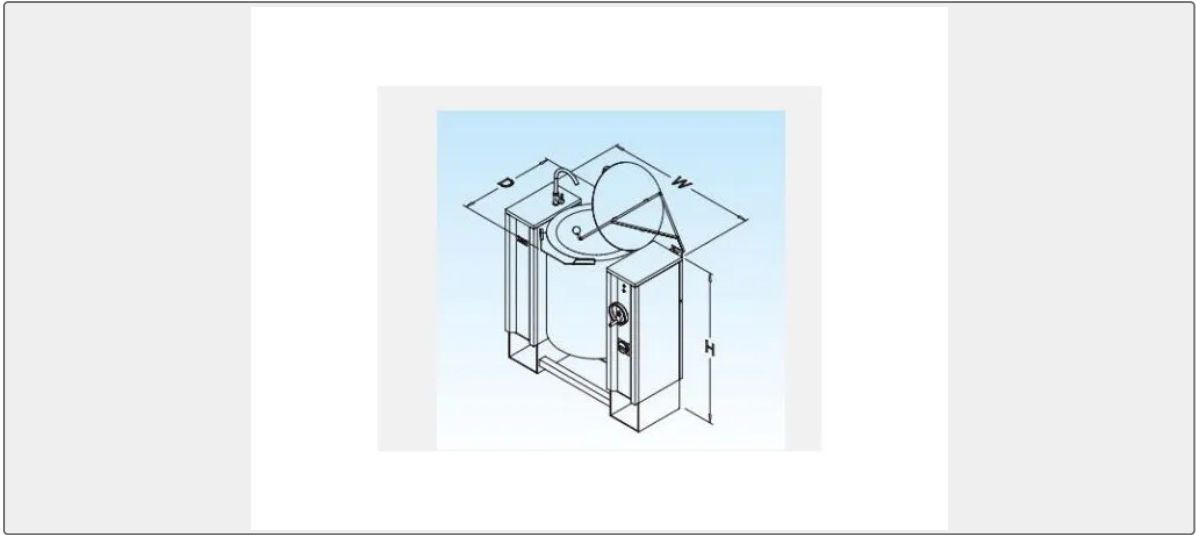

DZG-60Q Marine Tilting Pot Parameters

Model	DZG-40Q	DZG-60Q	DZG-80Q	Model	DZG-100Q	DZG-120Q	40MTLC
Volume(L)	40	60	80	Volume(L)	100	120	40
Voltage	380/415V-3PH-50Hz 440/480v 3ph-60Hz			Voltage	380/415V-3PH-50Hz 440/480v 3ph-60Hz		
Power(kw)	9	13.5	13.5	Power(kw)	13.5	18	9
Size(mm)	930X700X930	930X700X980	980X730X980	Size(mm)	1030X800X900	1080X920X980	800X700X850
Weight(kg)	120	130	150	Weight(kg)	170	250	100