

MARINE DAVIT AND CRANE

Electro-Hydraulic Cargo Hose Crane

YQ Series Electro-hydraulic type cargo hose crane The Electro-hydraulic crane is special equipment used on marine for lifting cargo hose,spare parts and other sundries. It can be located on mid-main deck or upper ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Davit and crane
Standard	EN
Material	Cast steel
Certificate	CCS , Rina , ABS, BV, GL,

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Davit and crane	Model / SKU	Electro-Hydraulic-Cargo-Hose-Crane
Standard	EN	Material	Cast steel
Certificate	CCS , Rina , ABS, BV, GL,	Warranty	12 Months unless specified otherwise
Origin	China		


CONTENTS

- YQ Series Electro-hydraulic type cargo hose crane
- Drawing
- Main technical parameter

YQ Series Electro-hydraulic type cargo hose crane

The Electro-hydraulic crane is special equipment used on marine for lifting cargo hose,spare parts and other sundries. It can be located on mid-main deck or upper deck for the lifting operation. Easy operation, High safety working load, High quality with long life service.

Drawing

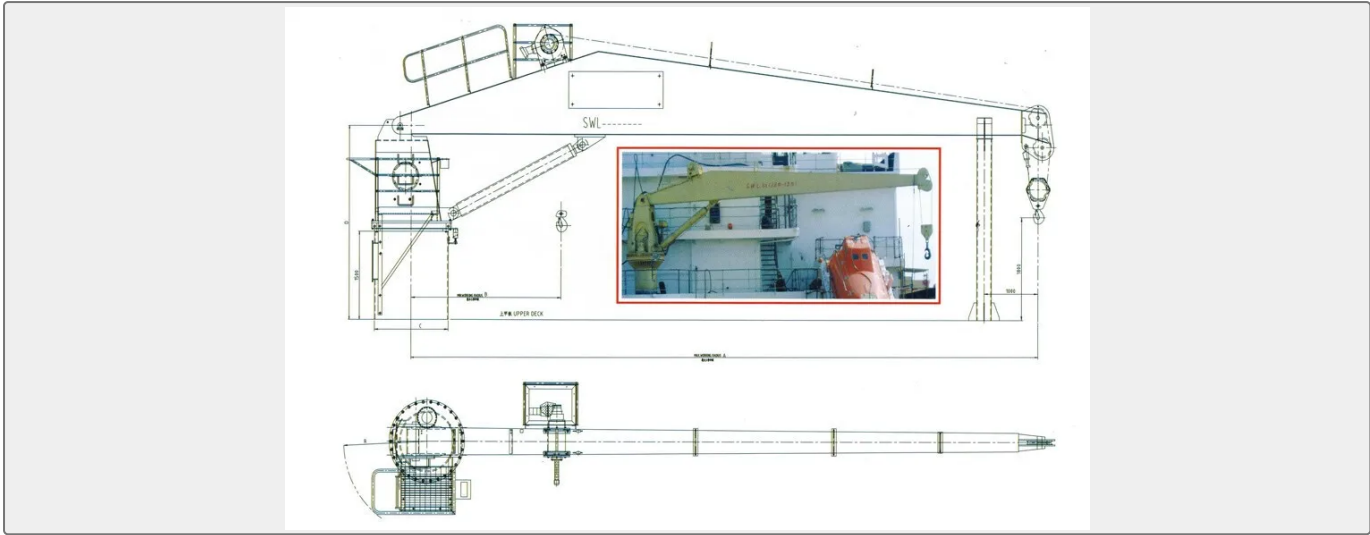

Main technical parameter

Type	SWL	w o r k i n g r a d i u s	Power	lifting height	lifting speed	luffing time	rotating velocity
t	m	k w	m	m/min	s	r/min	
YQ20/08	2	2 · 4 - 8	15	25	15	35-40	0.6
YQ20/12	2	3 · 7 - 1 2	15	25	15	45-50	0.8
YQ30/08	3	2 · 4 - 8	22	25	15	35-40	0.6

YQ30/12	3	3 . 7 - 1 2	22	25	15	45-50	0.8
YQ40/10	4	3 . 0 - 1 0	22	25	15	45-50	0.7
YQ40/16	4	4 . 9 - 1 6	22	25	15	60-65	1
YQ50/10	5	1 0	30	25	15	50-55	0.7
YQ50/16	5	4 . 9 - 1 6	30	25	15	60-65	1
YQ60/12	6	3 . 7 - 1 2	37	25	15	60-65	0.9
YQ60/16	6	4 . 9 - 1 6	37	25	15	70-75	1
YQ80/12	8	3 . 7 - 1 2	45	30	15	60-65	0.8
YQ80/16	8	4 . 9 - 1 6	45	30	15	70-75	1

YQ80/20	8	6 . 2 - 2 0	45	30	15	75-80	1.2
YQ100/12	10	3 . 7 - 1 2	45	30	12	70-75	0.8
YQ100/16	10	1 . 9 - 1 6	45	30	12	75-80	0.6
YQ100/20	10	6 . 3 - 2 0	75	30	12	85-90	1.2
YQ150/12	15	3 . 7 - 1 2	75	30	12	70-75	0.8
YQ150/20	15	6 . 2 - 2 0	90	30	12	85-90	1.2
YQ200/16	20	4 . 9 - 1 6	110	30	10	70-75	0.9