

HANGER AND ELASTIC SUPPORT

Fixed Suspended Hanger

The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance. Advantage: High temperature, low temperature resistance, oil resistance and aging resistance. The support ad...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Hanger And Elastic Support
Standard	EN
Weight / Size	Dimension Fixed Suspended Hanger Main Specifications Model Size Static L...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications

Category	Hanger And Elastic Support	Model / SKU	Fixed-Suspended-Hanger
Standard	EN	Weight / Size	Dimension Fixed Suspended Hanger Main Specifications Model Size Static Load Workload A(mm) B(mm) C(mm) D(mm) kgf kgf VOP-021 230 80 45 110 600 200 VOP-025 255 100 60 120 700 230 VOP-026 280 100 55 130 800 270 VOP-027 310 125 75 130 1000 350 TS-444-3 320 125 70 120 1000 350 TS-472-3 360 160 90 160 2000 700
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


CONTENTS

- China Fixed Suspended Hanger:
- Dimension
- Fixed Suspended Hanger Main Specifications

China Fixed Suspended Hanger:

The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance.
Advantage: High temperature, low temperature resistance, oil resistance and aging resistance.
The support adopts the insulating cushion so it can receive high load and the higher temperature.
Applicable range: suitable for horizontal or vertical exhaust pipe.

Dimension

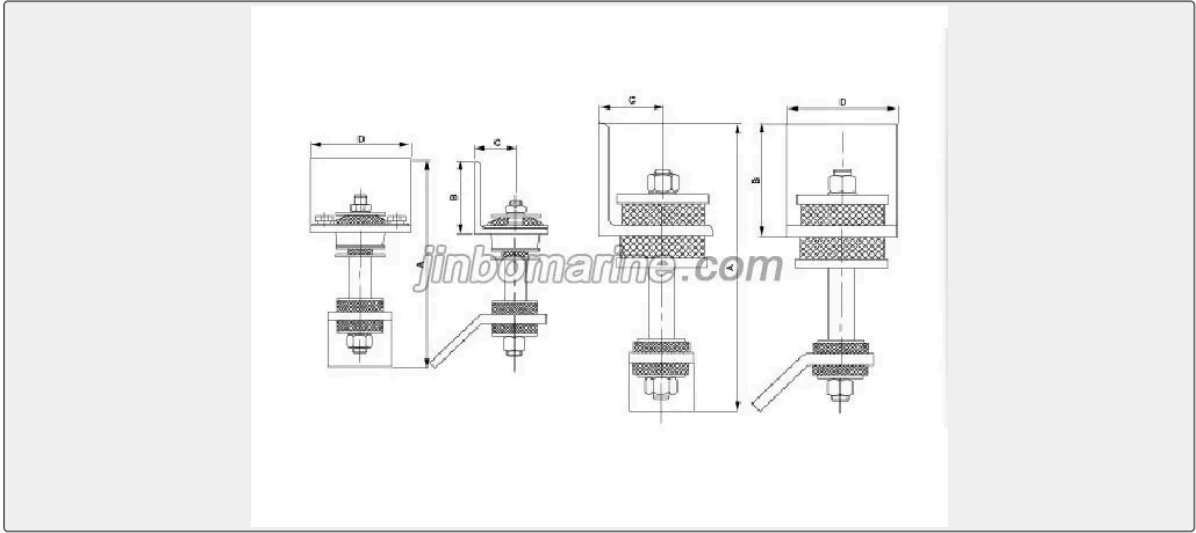

Fixed Suspended Hanger Main Specifications

Model	Size				Static Load	Workload
	A(mm)	B(mm)	C(mm)	D(mm)	kgf	kgf
VOP-021	230	80	45	110	600	200
VOP-025	255	100	60	120	700	230
VOP-026	280	100	55	130	800	270
VOP-027	310	125	75	130	1000	350
TS-444-3	320	125	70	120	1000	350
TS-472-3	360	160	90	160	2000	700