MARINE ENGINE TELEGRAPH SYSTEM

GCCJ-08 Intelligent Extended Alarm Display Board

ISO9001 Supplier

Class Certificate

Export Supply

GCCJ-08 Intelligent Extended Alarm Display Board Designed using microprocessor MCU control technology, with a working voltage of DC24V, the product panel is made of PVC veneer technology, which has the advantages o...



Key Highlights

Category	Marine Engine Telegraph System
Standard	EN
Weight / Size	below 19w 11.Touch screen size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Engine Telegraph System	**Model / SKU**	GCCJ-08-Intelligent-Extended-Alarm-Display-Board
Standard	EN	**Weight / Size**	below 19w 11.Touch screen size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

GCCJ-08 Intelligent Extended Alarm Display Board

Designed using microprocessor MCU control technology, with a working voltage of DC24V, the product panel is made of PVC veneer technology, which has the advantages of compact structure, convenient installation, beautiful appearance, and reliable performance. Mainly used for extended display of computer monitoring systems.

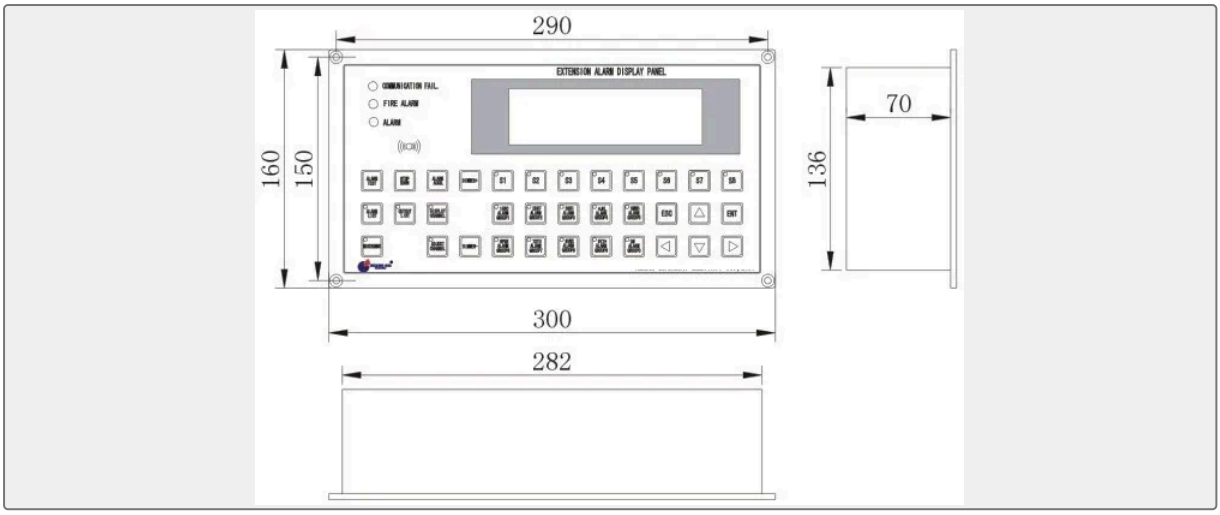

Function

1.Time display synchronization function2.Dimming function

3.Touch function

4.Real-time alarm function

5.Alarm display and statistics function6.Alarm sound function

7.Alarm silence confirmation function8.Alarm list display function

9.Group display function

10.Automatic record alarm function

11.Chinese and English switching function12.Engineer call

13. Duty alarm

14.Independent fire alarm function15.Engineer safety alarm

Technical Parameters

1.Normal usevoltage: DC24v

Operating voltagerange: DC20.4v~DC28.8V2.Operating temperature range: 0 °C~+50 °cStorage temperature range:-20 °C~+60 °c3.Use humidity range: 10~90% RH

4.Use the elevation: below 2000m5.Pollution degree: 2

6.Instant stop time: 10ms or less7.Inrush current: below 30A

8.Withstand voltage: AC1000v9.Insulation resistance: DC500V10.Power consumption: below 19w

11.Touch screen size: 7 inches(for alarm extension) or 10inches (for remote control system)