

RUDDER STOCK SEAL

Gliding Water Tight Lower Rudder Carrier CB*790-87

ISO9001 Supplier

Class Certificate

Export Supply

Product Advantage This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect Type Dimensions ...



Key Highlights

Category	Rudder Stock Seal
Standard	DIN
Weight / Size	Product Advantage This lower rudder bearer is used together with CB*789 ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications			
Category	Rudder Stock Seal	Model / SKU	Gliding-Water-Tight-Lower-Rudder-Carrier-CB-790-87

Standard	DIN	Weight / Size	Product Advantage This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect
		Type Dimensions (mm) d D H L h	
	A 50	50 100 123 60 26 60 60 110	
	136	70 28 70 70 125 152 85 28 80	
	80	140 162 95 28 90 90 155 177	
	110	28 100 100 160 216 130 37	
	110	110 170 226 140 37 120 120	
	190	236 150 37 130 130 205 246	
	160	37 140 140 220 255 170 37	
	150	150 240 282 195 37 160 160	
	250	297 210 37 170 170 260 307	
	220	37 180 180 272 330 235 40	
	190	190 292 345 250 40 200 200	
	310	359 260 44 220 220 340 385	
	286	44 240 240 370 411 312 44	
	260	260 400 448 338 45 280 280	
	430	474 364 50 300 300 456 500	
	390	50 320 320 486 530 420 50	
	340	340 512 552 442 50 360 360	
	540	580 470 50 380 380 568 605	
	495	50 400 400 600 630 520 50	
	420	420 634 687 550 62.5 440	
	440	662 712 575 62.5 460 460	
	690	737 600 62.5 480 480 720	
	762	625 62.5 500 500 750 787	
	650	62.5 Type Dimensions (mm) d	
	D H L h B 50	50 100 124 60 26 60	
	60	110 138 70 28 70 70 125 153	
	85	28 80 80 140 163 95 28 90 90	
	155	178 110 28 100 100 160 220	
	130	37 110 110 170 230 140 37	
	120	120 190 250 150 37 130 130	
	205	260 160 37 140 140 220 285	
	170	37 150 150 240 300 195 37	
	160	160 250 310 210 37 170 170	
	260	330 220 37 180 180 272 348	
	235	40 190 190 292 366 250 40	
	200	200 310 392 260 44 220 220	
	340	418 286 44 240 240 370 458	
	312	44 260 260 400 484 338 45	
	280	280 430 510 364 50 300 300	
	456	540 390 50 320 320 486 562	
	420	50 340 340 512 590 442 50	
	360	360 540 615 470 50 380 380	
	568	640 495 50 400 400 600 700	
	520	50 420 420 634 725 550 62.5	
	440	440 662 750 575 62.5 460	
	460	690 775 600 62.5 480 480	

			720 800 625 62.5 500 500 750 787 650 62.5
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


Product Advantage

This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect

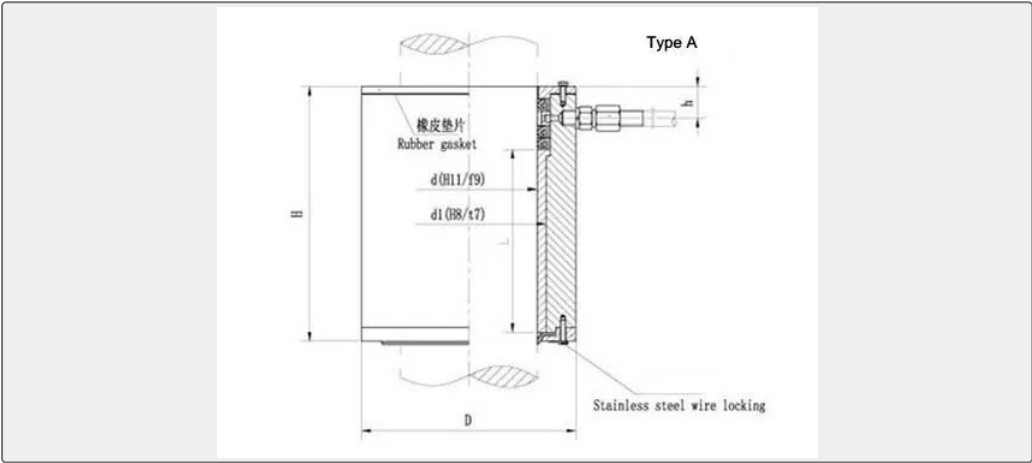

Type	Dimensions (mm)				
	d	D	H	L	h

A	50	50	100	123	60	26
	60	60	110	136	70	28
	70	70	125	152	85	28
	80	80	140	162	95	28
	90	90	155	177	110	28
	100	100	160	216	130	37
	110	110	170	226	140	37
	120	120	190	236	150	37
	130	130	205	246	160	37
	140	140	220	255	170	37
	150	150	240	282	195	37
	160	160	250	297	210	37
	170	170	260	307	220	37
	180	180	272	330	235	40
	190	190	292	345	250	40
	200	200	310	359	260	44
	220	220	340	385	286	44
	240	240	370	411	312	44
	260	260	400	448	338	45
	280	280	430	474	364	50
	300	300	456	500	390	50
	320	320	486	530	420	50
	340	340	512	552	442	50
	360	360	540	580	470	50
	380	380	568	605	495	50
	400	400	600	630	520	50
	420	420	634	687	550	62.5
	440	440	662	712	575	62.5
	460	460	690	737	600	62.5
	480	480	720	762	625	62.5
	500	500	750	787	650	62.5

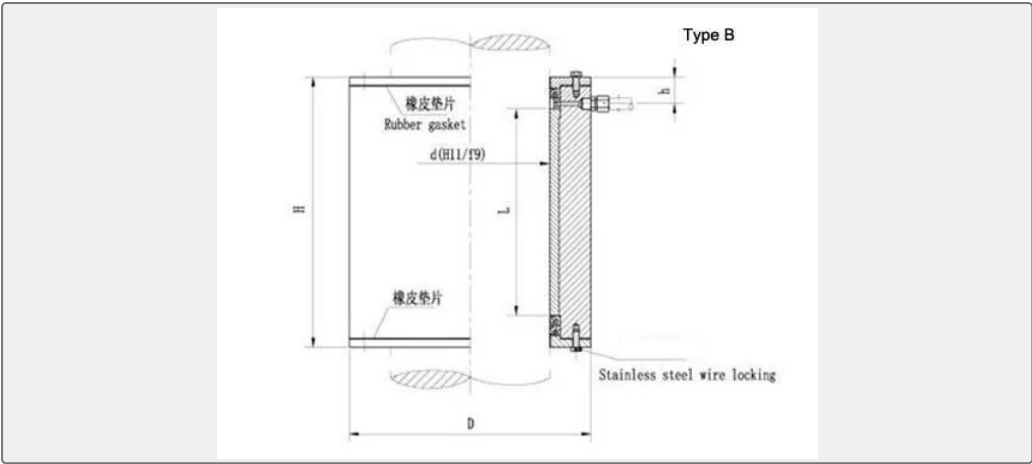

Type	Dimensions (mm)				
	d	D	H	L	h

B	50	50	100	124	60	26
	60	60	110	138	70	28
	70	70	125	153	85	28
	80	80	140	163	95	28
	90	90	155	178	110	28
	100	100	160	220	130	37
	110	110	170	230	140	37
	120	120	190	250	150	37
	130	130	205	260	160	37
	140	140	220	285	170	37
	150	150	240	300	195	37
	160	160	250	310	210	37
	170	170	260	330	220	37
	180	180	272	348	235	40
	190	190	292	366	250	40
	200	200	310	392	260	44
	220	220	340	418	286	44
	240	240	370	458	312	44
	260	260	400	484	338	45
	280	280	430	510	364	50
	300	300	456	540	390	50
	320	320	486	562	420	50
	340	340	512	590	442	50
	360	360	540	615	470	50
	380	380	568	640	495	50
	400	400	600	700	520	50
	420	420	634	725	550	62.5
	440	440	662	750	575	62.5
	460	460	690	775	600	62.5
	480	480	720	800	625	62.5
	500	500	750	787	650	62.5