

HAND PUMP

Half Twist-action Hand Pump

Half Twist-action Hand Pump Marine half twist-action hand pump clean water, gasoline, kerosene, and iron and copper and other non-corrosive liquids, does not apply to fiber or other solid particles of the...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Hand Pump
Standard	EN
Material	Iron or Copper Alloy
Weight / Size	Structural Specifications Main Specification Type Capacity Head Suction ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Hand Pump	Model / SKU	Half-Twist-action-Hand-Pump
Standard	EN	Material	Iron or Copper Alloy
Weight / Size	Structural Specifications Main Specification Type Capacity Head Suction vacuum height Weight (l/min) (m) (m) (kg) YL-0 15 14 5 5 YL-1 20 14 5 5.5 YL-2 25 26 6 7.5 YL-3 28 26 6 9 YL-5 65 18 6.5 22.5 YL-7 105 18 6.5 34.5 Type Code YL:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS


- Half Twist-action Hand Pump
 - Main Specification
- Structural Specifications
 - Type Code

Half Twist-action Hand Pump

Marine half twist-action hand pump clean water, gasoline, kerosene, and iron and copper and other non-corrosive liquids, does not apply to fiber or other solid particles of the liquid, pumping the liquid below the temperature of 60°C.

Its performance range: flow rate 15-105 l/min, maximum lift of 26 meters. CYL hand pump compact structure, beautiful style and generous, easy to use and reliable.

Structural Specifications

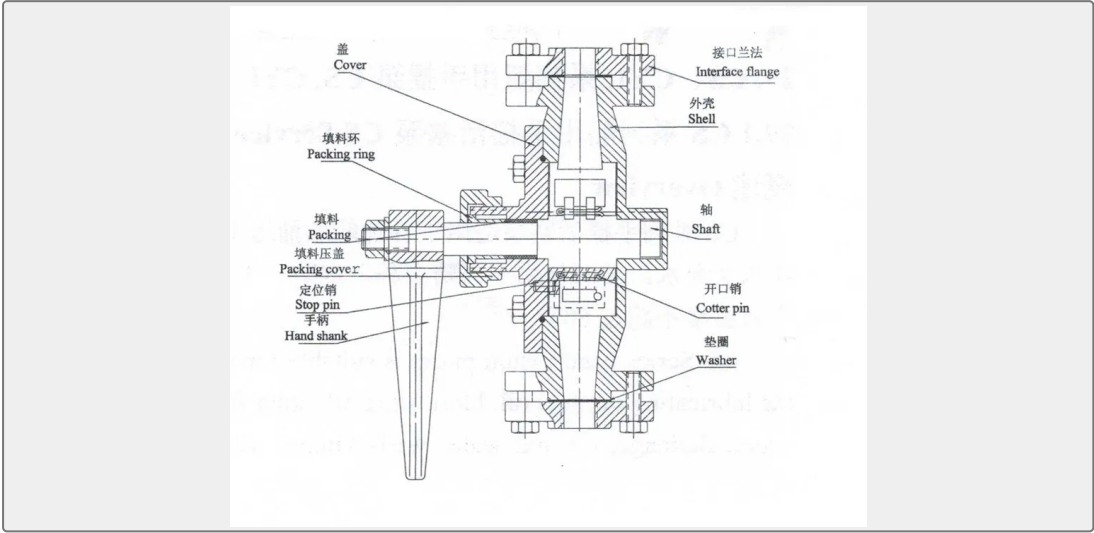

Main Specification

Type	Capacity	Head	Suction vacuum height	Weight
	(l/min)	(m)	(m)	(kg)
YL-0	15	14	5	5
YL-1	20	14	5	5.5
YL-2	25	26	6	7.5
YL-3	28	26	6	9
YL-5	65	18	6.5	22.5
YL-7	105	18	6.5	34.5

Type Code

YL: Half twist-action hand pump

15: Inlet/outlet Diameter