

MARINE COMMUNICATION AND NAVIGATION EQUIPMENT

HLD-RADAR 300 Fully Automatic Working Radar

ISO9001 Supplier

Class Certificate

Export Supply

Features DIM Auto-Dimming Co-frequency rejection Target Tracking (Manual/Automatic, Target Capture & Tracking)Use the cursorto measure bearing, distance, and position Distance is measured wit...



Key Highlights

Category Marine Communication And Navigation Equipment

Standard EN

Certificate ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Communication And Navigation Equipment	Model / SKU	HLD-RADAR-300-Fully-Automatic-Working-Radar
Standard	EN	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

Features


DIM Auto-Dimming

Co-frequency rejection

Target Tracking (Manual/Automatic, Target Capture & Tracking)Use the cursorto measure bearing, distance, and position

Distance is measured with a fixed pitch ring/VRM (variable pitch collar).Measure the bearing with EBL(Electronic Azimuth Line).Auxiliary routes, parallel lines, and markers are displayed

- True Sport Mode
- HDG 84.6 NMOS CENT
- Relative motion mode
- Self-diagnosis function
- Broadcast in language
- Use scene customization
- Vector and trail display
- StandardsC/5C
- Central alarm display
- IP camera access
- ntegrated navigation information display
- ENCNautical Charts/River Charts(optionalfunction)
- Performance Monitor (Optional)
- On-board all-in-one machine

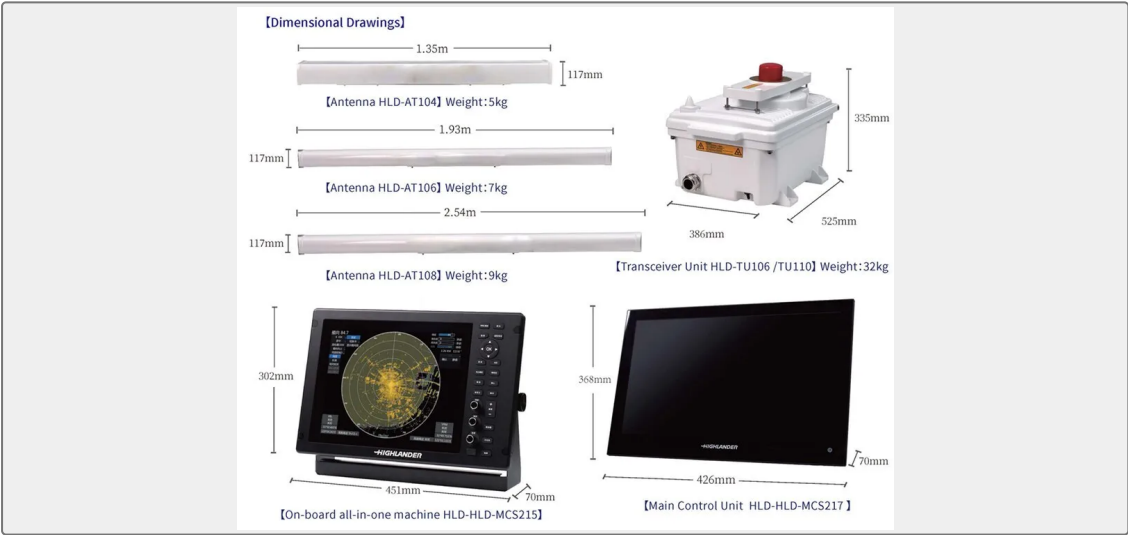

Name	Specification	Length (mm)	Height (mm)	Depth (mm)	Weight (kg)
On-board all-in-one machine	HLD-MCS212	390	260	70	4.5
On-board all-in-one machine	HLD-MCS215	451	302	70	4.5
Main Control Unit	HLD-MCS217*	426	368	70	3.5
Main Control Unit	HLD-MCS219*	462	378	70	3.5

*Equipped with human-machine interaction unit

HLD-RADAR 300配置

Standard

Antenna HLD-AT104/106/108

Transceiver Unit HLD-TU106/110

On-board all-in-one machine HLD-MCS212/215

HLD-MCS217/219 (Equipped with human-machine interaction unit)

Optional

HMI Unit HLD-IU600



【Human-machine Interaction Unit HLD-IU600 3kg】

HLD-RADAR 300