

SHACKLE


Japanese Type Straight Unloading Shackle

Japanese Type Straight Unloading Shackle Size Pin(Dia) t d B L ...

ISO9001 Supplier

Class Certificate

Export Supply

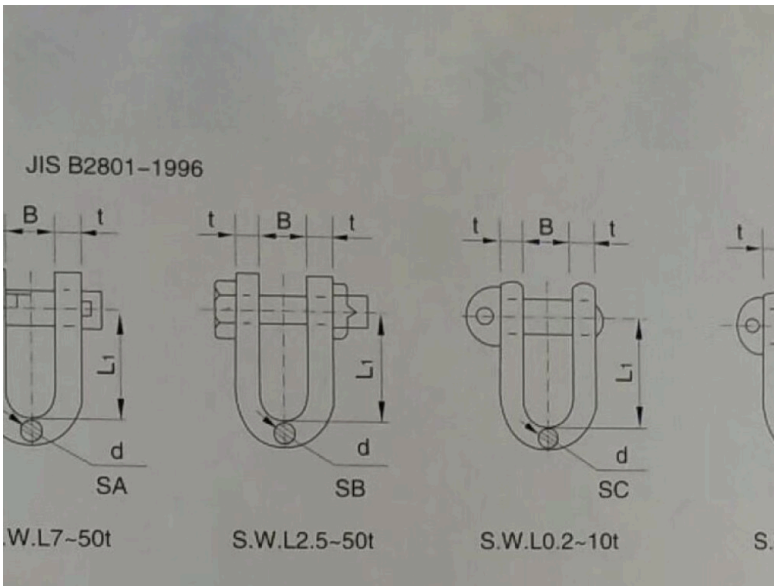

Key Highlights


Category	Shackle
Standard	DIN
Weight / Size	Japanese Type Straight Unloading Shackle Size Pin(Dia) t d B L SWL 6 8 6...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Shackle	Model / SKU	Japanese-Type-Straight-Unloading-Shackle
Standard	DIN	Weight / Size	Japanese Type Straight Unloading Shackle Size Pin(Dia) t d B L SWL 6 8 6 6 11 24 0.2 8 10 8 8 14 32 0.315 10 12 10 10 17 40 0.6 12 15 12 12 20 48 1 14 17 14 14 24 56 1.25 16 19 16 16 26 64 1.6 18 21 18 18 29 72 2 20 24 20 20 31 80 2.5 22 26 22 22 34 88 3.15 24 30 24 24 39 96 3.6 26 32 26 26 41 104 4 28 34 28 28 43 112 4.8 30 36 30 30 45 120 5 32 38 32 32 48 128 6.3 34 40 34 34 50 136 7 36 42 36 36 54 144 8 38 46 38 38 57 152 9 40 48 40 40 60 160 10 42 51 42 42 63 168 11 44 54 44 44 66 176 12.5 46 56 46 46 68 184 13 48 58 48 48 72 192 14 50 60 50 50 75 200 16 55 65 55 55 83 220 18 60 70 60 60 90 240 20 65 77 65 65 98 260 25 70 83 70 70 105 280 31.5 75 90 75 75 112 300 35 80 96 80 80 120 320 40 85 102 85 85 128 340 45 90 108 90 90 135 360 50 Chart:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China Japanese Type Straight Unloading Shackle:

Japanese Type Straight Unloading Shackle

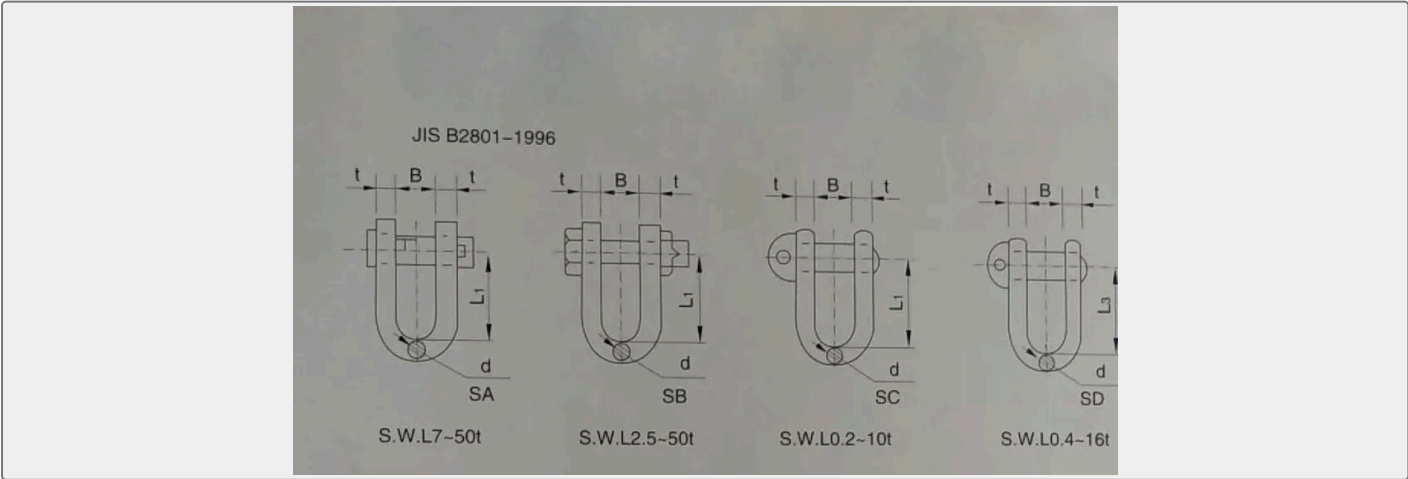

Size	Pin(Dia)	t	d	B	L	SWL
6	8	6	6	11	24	0.2
8	10	8	8	14	32	0.315
10	12	10	10	17	40	0.6
12	15	12	12	20	48	1
14	17	14	14	24	56	1.25
16	19	16	16	26	64	1.6
18	21	18	18	29	72	2
20	24	20	20	31	80	2.5
22	26	22	22	34	88	3.15
24	30	24	24	39	96	3.6
26	32	26	26	41	104	4
28	34	28	28	43	112	4.8
30	36	30	30	45	120	5
32	38	32	32	48	128	6.3
34	40	34	34	50	136	7
36	42	36	36	54	144	8
38	46	38	38	57	152	9
40	48	40	40	60	160	10
42	51	42	42	63	168	11
44	54	44	44	66	176	12.5
46	56	46	46	68	184	13
48	58	48	48	72	192	14
50	60	50	50	75	200	16
55	65	55	55	83	220	18
60	70	60	60	90	240	20
65	77	65	65	98	260	25
70	83	70	70	105	280	31.5
75	90	75	75	112	300	35
80	96	80	80	120	320	40
85	102	85	85	128	340	45
90	108	90	90	135	360	50

Chart:

Size	Pin(Dia)	tand d	B	L3
10	12	10	20	40
12	15	12	24	48
14	17	14	28	56
16	20	16	32	64
20	24	20	40	80
22	27	22	44	88
24	29	24	48	96
26	32	26	52	104
28	34	28	56	112
30	36	30	60	120
34	42	34	68	136
38	45	38	76	152
40	48	40	80	160
42	51	42	84	168
48	58	48	96	192
52	62	52	104	208
58	68	58	116	232