

CKY MARINE PUBLIC ADDRESS SYSTEM

ISO9001 Supplier

Class Certificate

Export Supply

K14-Ex Explosion-Proof Speaker

K14-Ex Explosion-Proof Speaker Input: voltageconstant 70V/100V/120V Resistance constant 8Q Power:0.5W/1W/2W/3W/5W/10W/15W/25W Material: Aluminium alloy Color: Red (...



Key Highlights

Category	CKY Marine Public Address System
Standard	GB
Material	K14-Ex Explosion-Proof Speaker Input: voltageconstant 70V/100V/120V Res...
Weight / Size	Red (RAL3020) IP class:IP66 Weight:3.8Kg Explosion-proof class:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	CKY Marine Public Address System	Model / SKU	K14-Ex-Explosion-Proof-Speaker
Standard	GB	Material	K14-Ex Explosion-Proof Speaker Input: voltageconstant 70V/100V/120V Resistance constant 8Q Power:0.5W/1W/2W/3W/5W/10W/15W/25W Material:
Weight / Size	Red (RAL3020) IP class:IP66 Weight:3.8Kg Explosion-proof class:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China K14-Ex Explosion-Proof Speaker:

K14-Ex Explosion-Proof Speaker

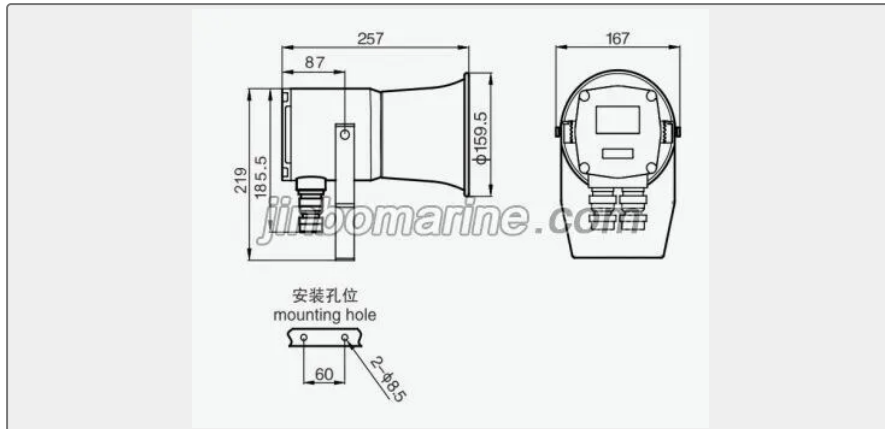

Input: voltage constant 70V/100V/120V

Resistance constant 8Q

Power: 0.5W/1W/2W/3W/5W/10W/15W/25W

Material: Aluminium alloy

Color: Red (RAL3020)

IP class: IP66

Weight: 3.8Kg

Explosion-proof class: Exd II B T5 Gb

Environment temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Cable entrance hole size: 2- $\phi 14.5\text{mm}$

Remark: cable gland: M25