

CKY MARINE PUBLIC ADDRESS SYSTEM

KG-1D Public Address System Host

KG-1D Public Address System Host Nonlinear distortion:<7% Signal to noise ratio:>46dB
Output power:50W/100W Receiving frequency range:FM87 ~ 108MHz Sensitivity:FM<20uV Play
frequency response:150Hz ~ 5KHz:±2dB

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	CKY Marine Public Address System
Standard	EN
Weight / Size	KG-1D Public Address System Host Nonlinear distortion:46dB Output power:...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	CKY Marine Public Address System	Model / SKU	KG-1D-Public-Address-System-Host
Standard	EN	Weight / Size	KG-1D Public Address System Host Nonlinear distortion:<7% Signal to noise ratio:>46dB Output power:50W/100W Receiving frequency range:FM87 ~ 108MHz Sensitivity:FM<20uV Play frequency response:150Hz ~ 5KHz:±2dB Mainpower:AC220V±10% Color:black (RAL9005) IP class:IP20 Weight:9.2/10.4Kg Power:100W/200W
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China KG-1D Public Address System Host:

KG-1D Public Address System Host

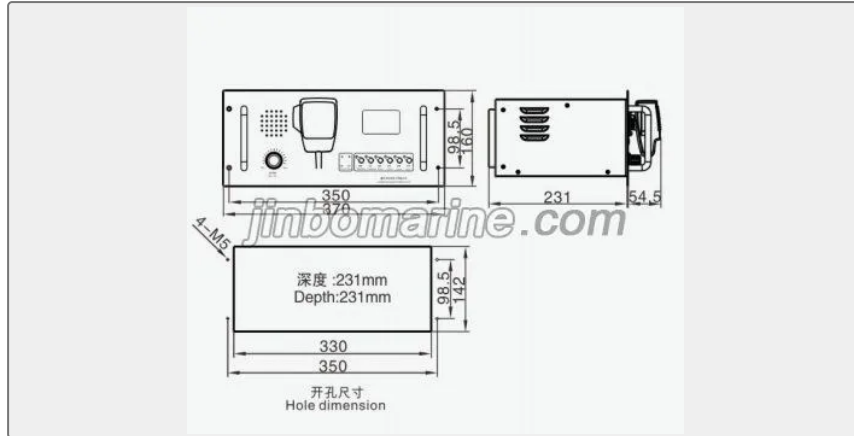

Nonlinear distortion:<7%

Signal to noise ratio:>46dB

Output power:50W/100W

Receiving frequency range:FM87 ~ 108MHz

Sensitivity:FM<20uV

Play frequency response:150Hz ~ 5KHz:±2dB

Mainpower:AC220V±10%

Color:black (RAL9005)

IP class:IP20

Weight:9.2/10.4Kg

Power:100W/200W