

CKY MARINE PUBLIC ADDRESS SYSTEM

KG-2T Public Address System Host

KG-2T Public Address System Host Nonlinear distortion:≤7% Signal to noise ratio:≥46dB Play frequency response:150Hz ~ 5KHz:±2dB Output power:2x100W/2x200W/2x300W Receiving...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	CKY Marine Public Address System
Standard	EN
Weight / Size	KG-2T Public Address System Host Nonlinear distortion:≤7% Signal to noise...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	CKY Marine Public Address System	Model / SKU	KG-2T-Public-Address-System-Host
Standard	EN	Weight / Size	KG-2T Public Address System Host Nonlinear distortion:≤7% Signal to noise ratio:≥46dB Play frequency response:150Hz ~ 5KHz:±2dB Output power:2x100W/2x200W/2x300W Receiving frequency range:FM87 ~ 108MHz Sensitivity:FM≤20uV Main power:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China KG-2T Public Address System Host:

KG-2T Public Address System Host

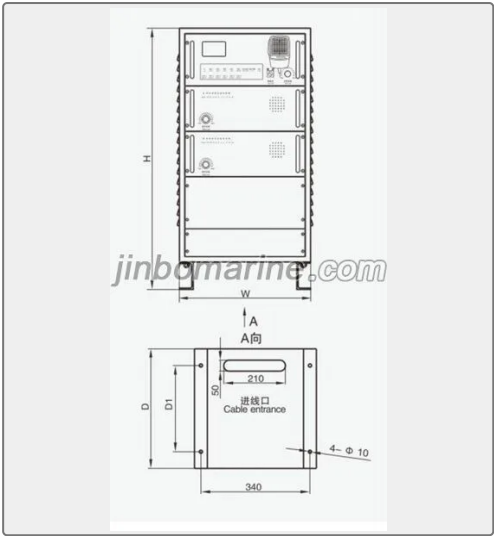

Nonlinear distortion:≤7%

Signal to noise ratio:≥46dB

Play frequency response:150Hz ~ 5KHz:±2dB

Output power:2x100W/2x200W/2x300W

Receiving frequency range:FM87 ~ 108MHz

Sensitivity:FM≤20uV

Main power: two lines AC220V±10%

Emergency power: two lines DC24V -25% +30%

Color: Light gray (RAL7035)

IP class:IP20

Weight: 56/75Kg

Power:400W/800W/1200W

Mounting size

Output power	H	W	D	D1
2x100W	760	380	325	220
2x200W	760	380	325	220
2x300W	760	380	375	270