

GENERAL EMERGENCY ALARM SYSTEM

KG-3JK General Emergency Alarm Controller

KG-3JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power: DC24V -25% +30% Alarm signal frequency: 1000±50Hz General emergency alarm time sequence: ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


|                                                                                                        |                                                                             |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Category                                                                                               | General Emergency Alarm System                                              |
| Standard                                                                                               | DIN                                                                         |
| Weight / Size                                                                                          | KG-3JK General Emergency Alarm Controller Main power:AC220V±10% Emergenc... |
| Certificate                                                                                            | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS                                  |
| We can supply according to your requirement, drawings, class certificate needs, and delivery schedule. |                                                                             |

Technical Specifications

|             |                                            |               |                                                                                  |
|-------------|--------------------------------------------|---------------|----------------------------------------------------------------------------------|
| Category    | General Emergency Alarm System             | Model / SKU   | KG-3JK-General-Emergency-Alarm-Controller                                        |
| Standard    | DIN                                        | Weight / Size | KG-3JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power: |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | Warranty      | 12 Months unless specified otherwise                                             |
| Origin      | China                                      |               |                                                                                  |

China KG-3JK General Emergency Alarm Controller:

KG-3JK General Emergency Alarm Controller

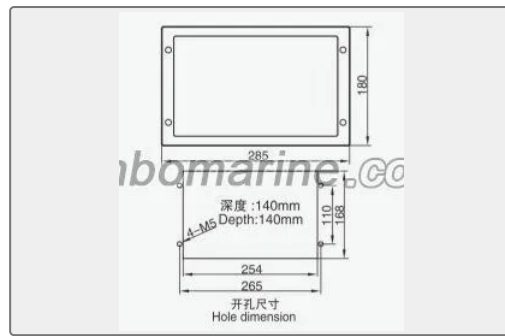

Main power: AC220V $\pm$ 10%

Emergency power: DC24V -25% +30%

Alarm signal frequency: 1000 $\pm$ 50Hz

General emergency alarm time sequence:

7 short pulses followed by a long pulse. Resend it every two seconds

Fire alarm time sequence: continuous modulated long tone

Manual alarm time sequence: Output according to the switch on or off

Interface signal level between general emergency alarm controller and public address: -7  $\pm$ 1dB

Interface resistance level between general emergency alarm controller and public address: 1k

Passive contact load(resistance): 8A/250VAC

KG-3JK Color: black ( RAL9005 )

IP class: IP20

Weight: 9.5Kg

Power: 10W