

HFM FIRE DOOR CONTROL SYSTEM

KSM-2D Fire Door Relay Box

KSM-2D Fire Door Relay Box Input voltage: AC220V±10% DC24V
Output voltage: DC24V -25% +30% Output power:480W Color: Light gray
(RAL7035) Tuffing ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	HFM Fire Door Control System
Standard	EN
Weight / Size	Light gray (RAL7035) Tuffing box cable entrance hole size:18-Φ18mm IP cla...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	HFM Fire Door Control System	Model / SKU	KSM-2D-Fire-Door-Relay-Box
Standard	EN	Weight / Size	Light gray (RAL7035) Tuffing box cable entrance hole size:18-Φ18mm IP class:IP44 Weight:17Kg Power:≤580W
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China KSM-2D Fire Door Relay Box:

KSM-2D Fire Door Relay Box

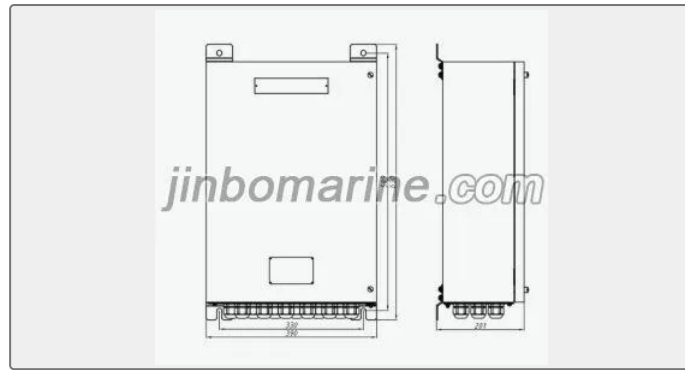

Input voltage: AC220V $\pm$ 10% DC24V

Output voltage: DC24V -25% +30%

Output power:480W

Color: Light gray (RAL7035)

Tuffing box cable entrance hole size:18- Φ 18mm

IP class:IP44

Weight:17Kg

Power: $\leq$ 580W