

MARINE LED LIGHT

LED JL1201 Flood Light

Application Applied to illumination of military ship and ship, decks, dock, plaza and working areas. Product Features 1. The shell is made of high quality stainless steel plate. 2. The lampshade...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine LED Light
Standard	GB
Material	The shell is made of high quality stainless steel plate.
Weight / Size	Specification Type Voltage Power Replacement Liminous Flux CT Weight JL1...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine LED Light	Model / SKU	LED-JL1201-Flood-Light
Standard	GB	Material	The shell is made of high quality stainless steel plate.
Weight / Size	Specification Type Voltage Power Replacement Liminous Flux CT Weight JL1201 110/220V 50/60HZ 120W 1000W Halogen Lamp 15000lm 3000-6500K 17kg	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China LED JL1201 Flood Light:

Application

Applied to illumination of military ship and ship, decks, dock, plaza and working areas.


Product Features

1. The shell is made of high quality stainless steel plate.
2. The lampshade is made of high-strength toughened glass.
3. LED Light Source, light soft, no glare, supper high uniformity and visual comfort, color $\geq$ 80%, light rate $>$ 70%, life time 30000h,energy saving 50%, new green environmental product, easy installation, general G12 lamp holder.
4. Environment temperature I s -20-45degree within the scope of work.
5. Protection class is IP56.

Standard

1. Chapter 3, Part 4 of Classification Society Rules for Classification of Sea-going Steel Ships 2015 and its Amendments;
- 2.GB7000.1-2015 , Luminaires –Part1:General requirements and tests.

Specification

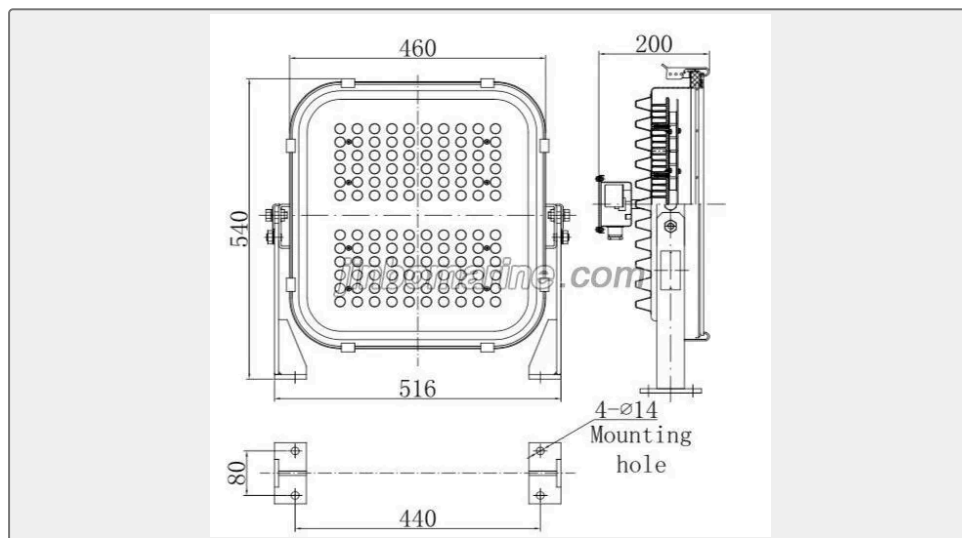

Type	Voltage	Power	Replacement	Liminous Flux	CT	Weight
JL1201	110/220V 50/60HZ	120W	1000W Halogen Lamp	15000lm	3000-6500K	17kg