CB MARINE GATE VALVE

Marine Cast Iron Gate Valve CB/T465-1995

ISO9001 Supplier

Class Certificate

Export Supply

Marine cast iron gate valve is used on the pipe system for fuel oil, fresh water, lubrication oil. Design Standard: CB/T465-1995 Test Standard: GB600 Flange Size as per GB569 or GB2501 ...



Key Highlights

Category	CB Marine Gate Valve
Standard	GB
Material	Cast Iron
Weight / Size	GB600 Flange Size as per GB569 or GB2501 Type nominal pressure(Mpa) nomi...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	CB Marine Gate Valve	**Model / SKU**	Marine-Cast-Iron-Gate-Valve-CB-T465-1995
Standard	GB	**Material**	Cast Iron
Weight / Size	GB600 Flange Size as per GB569 or GB2501 Type nominal pressure(Mpa) nominal diameter(mm) applicable medium A,AS 0.6 50-150 fuel oil,fresh water, lubrication oil 0.4 175-300 AS 0.25 350-500 Main Parts & Material:	**Certificate**	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- China Marine Cast Iron Gate Valve CB/T465-1995:
- Main Parts & Material:
- Main Size List(mm):

China Marine Cast Iron Gate Valve CB/T465-1995:

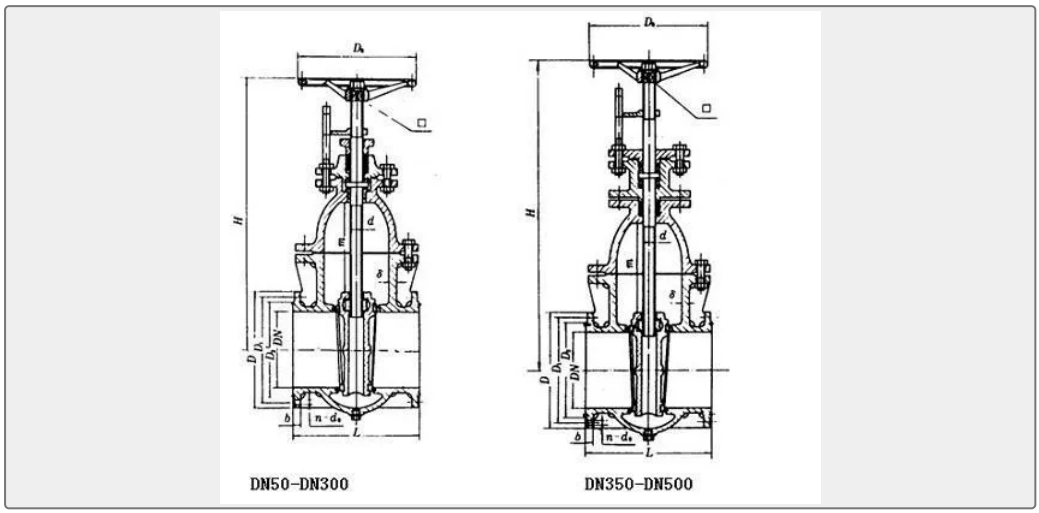

Marine cast iron gate valve is used on the pipe system for fuel oil, fresh water, lubrication oil.

Design Standard: CB/T465-1995

Test Standard: GB600

Flange Size as per GB569 or GB2501

Type	nominal pressure(Mpa)	nominal diameter(mm)	applicable medium
A,AS	0.6	50-150	fuel oil,fresh water, lubrication oil
	0.4	175-300	
AS	0.25	350-500	

Main Parts & Material:

Body-Cast Iron

Bonnet-Cast Iron

Disc-Cast Iron

Stem-Bronze

Nut-Bronze

Seal Ring-Bronze

Main Size List(mm):

For Type A:

PN MPa	DN (mm)	Structure Dimension		Flange					Bolt		Thickness δ	stem		hand wheel D0	Lift Range m	Weight (kg)
		L≈	H≈	D	D1	D2	b	d0	n个	Th.		d	□			
0.6	50	190	340	135	130	84	16	15	6	M14	8	Tr20×8(P4)LH	14	180	60	20
	65	200	372	155	123	104	15	15	6	M14	9	Tr20×8(P4)LH	14	180	75	24
	80	220	430	170	138	118	15	15	8	M14	9	Tr24×10(P5)LH	17	200	92	33
	100	220	460	190	158	138	15	15	8	M14	10	Tr24×10(P5)LH	17	200	112	40
	125	242	528	215	183	164	15	15	10	M14	10	Tr26×10(P5)LH	19	225	138	61
	150	248	566	240	208	190	16	15	12	M14	11	Tr26×10(P5)LH	19	225	165	70
0.4	175	268	630	270	238	221	16	15	12	M14	11	Tr28×10(P5)LH	22	250	190	85
	200	278	685	295	264	247	16	15	12	M14	11	Tr28×10(P5)LH	22	250	215	100
	250	310	755	365	327	306	18	17	14	M16	13	Tr30×10(P5)LH	24	280	265	153
	300	345	835	430	386	360	19	21	14	M20	13	Tr30×10(P5)LH	24	280	315	199

For Type AS:

PN MPa	DN (mm)	Structure Dimension		Flange					Bolt		Thickness δ	stem		hand wheel D0	Lift Range m	Weight (kg)
		L≈	H≈	D	D1	D2	b	d0	n个	Th.		d	□			
0.6	50	178	340	140	110	90	16	14	4	M12	8	Tr20×8(P4)LH	14	180	60	20.3
	65	190	372	160	130	110	16	14	4	M12	9	Tr20×8(P4)LH	14	180	75	24.5
	80	203	430	190	150	128	18	18	4	M16	9	Tr24×10(P5)LH	17	200	92	33.8
	100	229	460	210	170	148	18	18	4	M16	10	Tr24×10(P5)LH	17	200	112	41.2
	125	254	528	240	200	178	20	18	8	M16	10	Tr26×10(P5)LH	19	225	138	62.1
	150	267	566	265	225	202	20	18	8	M16	10	Tr26×10(P5)LH	19	225	165	71.6

0.4	175	292	630	295	255	232	22	18	8	M16	11	Tr28×10(P5)LH	22	250	190	86.4
	200	292	685	320	280	258	22	18	8	M16	11	Tr28×10(P5)LH	22	250	215	101.8
	250	330	755	375	335	312	24	18	12	M16	13	Tr30×12(P6)LH	24	280	265	155.1
	300	356	835	440	395	365	24	22	12	M20	13	Tr30×12(P6)LH	24	280	315	201.2
0.25	350	381	1050	490	445	415	26	22	12	M20	14	Tr36×12(P6)LH	27	320	365	298.3
	400	406	1145	540	495	465	28	22	16	M20	15	Tr36×12(P6)LH	27	360	418	372.1
	450	432	1330	595	550	520	28	22	16	M20	16	Tr40×12(P6)LH	32	400	468	560.0
	500	457	1420	645	600	570	30	22	20	M20	16	Tr40×12(P6)LH	32	450	518	627.4