

GB MARINE BOX VALVE

Marine Cast Iron Single Arrangement Exhaust Stop Box Valve GB/T1856-93

ISO9001 Supplier

Class Certificate

Export Supply

Marine Flanged Cast Iron Single Arrangement Exhaust Stop Box Valve has R/RS, S/SS types. R/RS is with two stop valves. S/SS is with three stop valves. Technical Specification: Design Standard:GB...



Key Highlights

Category	GB Marine Box Valve
Standard	GB
Material	Cast Iron
Weight / Size	Body-Cast Iron Bonnet-Cast Iron Disc-Bronze Seat-Bronze Stem-Bronze / St...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	GB Marine Box Valve	Model / SKU	Marine-Cast-Iron-Single-Arrangement-Exhaust-Stop-Box-Valve-GB-T1856-93
Standard	GB	Material	Cast Iron
Weight / Size	Body-Cast Iron Bonnet-Cast Iron Disc-Bronze Seat-Bronze Stem-Bronze / Stainless Steel Main Size List(mm):	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Marine Cast Iron Single Arrangement Exhaust Stop Box Valve GB/T1856-93:
 - Main Material:
- Technical Specification:
 - Main Size List(mm):

China Marine Cast Iron Single Arrangement Exhaust Stop Box Valve GB/T1856-93:

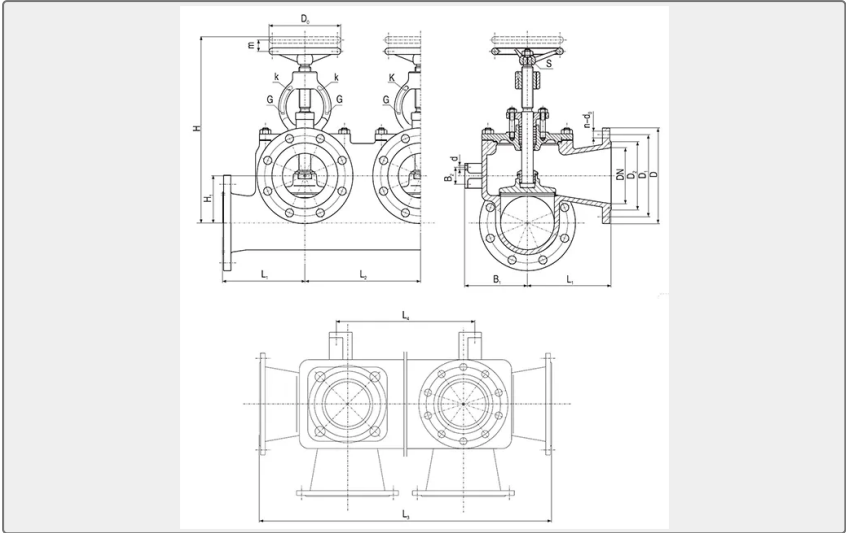

Marine Flanged Cast Iron Single Arrangement Exhaust Stop Box Valve has R/RS, S/SS types.

R/RS is with two stop valves.

S/SS is with three stop valves.

Technical Specification:

Design Standard:GB/T1856-93

Test Standard:GB600

Flange as per GB569 or GB2501

Nominal Pressure (Mpa)	Nominal Diameter(mm)	Applicable Medium
1.0	40~150	sea water, fresh water
0.6	200~250	

Main Material:

Body-Cast Iron

Bonnet-Cast Iron

Disc-Bronze

Seat-Bronze

Stem-Bronze / Stainless Steel

Main Size List(mm):

Type R, S (Flange as per GB569):

P N (M Pa)	D N (m m)	Structure Dimension										Thi ckn ess δ	connection dimension of flange						hand wheel		Lift Ran ge m	Weight(kg)		
		L 1	L 2	L3		L4		H ≈	H 1	B 1	B 2		d	D	D 1	D 2	b 1	n- d 0				bo lt T h.	D 0	S
				R	S	R	S																	
1. 0	40	1 1 0	1 6 0	38 0	5 4 0	2 1 0	3 7 0	2 8 3	4 8	9 5	5 0	1 3	8	1 2 5	9 3	7 4	1 6	6- 1 5	M 14	1 2 0	1 1	12	17 .1	24 .8
	50	1 2 0	1 8 0	42 0	6 0 0	2 3 0	4 1 0	3 1 5	5 8	1 0 0	5 0	1 5	8	1 3 5	1 0 3	8 4	1 6	6- 1 5	M 14	1 4 0	1 2	15	24 .5	36 .0
	65	1 3 0	1 8 0	44 0	6 2 0	2 3 0	4 1 0	3 4 5	7 3	1 2 0	5 0	1 5	9	1 5 5	1 2 3	1 0 4	1 5	6- 1 5	M 14	1 4 0	1 2	19	33 .5	50 .0
	80	1 4 0	2 0 0	48 0	6 8 0	2 6 0	4 6 0	3 9 0	8 9	1 3 0	6 0	1 7	9	1 7 0	1 3 8	1 1 8	1 5	8- 1 5	M 14	1 6 0	1 4	23	43 .5	64 .7
	100	1 7 0	2 3 0	57 0	8 0 0	2 9 0	5 2 0	4 3 0	1 1 0	1 5 0	6 0	1 7	10	1 9 0	1 5 8	1 3 8	1 5	8- 1 5	M 14	1 8 0	1 4	28	69 .5	10 2. 0
	125	2 0 0	2 5 0	65 0	9 0 0	3 1 0	5 5 6 0	4 9 0	1 3 5	1 6 0	6 0	1 7	10	2 1 5	1 8 3	1 6 4	1 5	1 0- 1 5	M 14	2 0 0	1 7	35	95 .4	12 5. 0
	150	2 3 0	2 8 0	74 0	1 0 2 0	3 4 0	6 2 0	5 6 0	1 5 2	1 7 5	6 0	1 7	11	2 4 0	2 0 8	1 9 0	1 6	1 2- 1 5	M 14	2 0 0	1 7	42	12 5	18 0. 5
0. 6	200	2 8 0	3 8 0	94 0	1 3 2 0	4 4 6	8 2 6	7 2 0	2 0 8	2 2 5	8 0	2 1	13	2 9 5	2 6 4	2 4 7	1 6	1 2- 1 5	M 14	3 6 0	2 7	50	20 2. 0	38 2. 0
	250	4 0 0	4 6 0	1260	1 7 2 0	5 4 4	1 0 4	8 7 0	2 4 6	2 7 0	8 0	2 1	14	2 6 5	3 2 7	3 0 6	1 8	1 4- 1 7	M 16	3 6 0	2 7	70	29 4. 0	55 3. 0

Type RS, SS (Flange as per GB2501):

P N (M Pa)	D N (m m)	Structure Dimension										Thi ckn ess δ	connection dimension of flange						hand wheel		Lift Ran ge m	Weight(kg)		
		L 1	L 2	L3		L4		H ≈	H 1	B 1	B 2		d	D	D 1	D 2	b	n- d 0				bo lt T h.	D 0	S
				R S	S S	R S	S S																	

1. 0	40	1 1 5	1 8 0	41 0	5 9 0	2 3 0	4 1 0	2 8 3	4 8	1 0 5	5 0	1 3	8	1 5 0	1 1 0	8 8	1 8	4- 1 8	M 16	1 2 0	1 1	12	20 .5	30 .0
	50	1 2 5	1 9 5	44 5	6 5 0	2 4 5	4 4 0	3 1 5	5 8	1 1 5	5 0	1 5	8	1 6 5	1 2 5	1 0 2	2 0 0	4- 1 8	M 16	1 4 0	1 2	14	30	44 .3
	65	1 4 5	2 1 5	50 5	7 2 0	2 6 5	4 8 0	3 4 5	7 3	1 3 5	5 0	1 5	9	1 8 5	1 4 5	1 2 2	2 0 0	4- 1 8	M 16	1 4 0	1 2	20	40	60
	80	1 5 5	2 3 0	54 0	7 7 0	2 9 0	5 2 0	3 9 0	8 9	1 4 5	6 0	1 7	9	2 0 0	1 6 0	1 3 3	2 2 0	8- 1 8	M 16	1 6 0	1 4	26	52 .6	79
	10 0	1 7 5	2 7 0	62 0	8 9 0	3 3 0	6 0 0	4 3 0	1 1 0	1 6 5	6 0	1 7	10	2 2 0	1 8 0	1 5 8	2 4 0	8- 1 8	M 16	1 8 0	1 4	36	81 .5	12 0
	12 5	2 0 0	2 9 0	69 0	9 8 0	3 5 0	6 4 0	4 9 0	1 3 5	1 8 0	6 0	1 7	10	2 5 0	2 1 0	1 8 4	2 6 0	8- 1 8	M 16	2 0 0	1 7	45	10 2.6	15 0.8
	15 0	2 2 5	3 2 5	77 5	11 0 0	3 8 5	7 1 0	5 6 0	1 5 2	2 0 0	6 0	1 7	11	2 8 5	2 4 0	2 1 2	2 6 0	8- 2 2	M 20	2 0 0	1 7	58	14 6.8	21 2.8
0. 6	20 0	2 7 5	3 8 0	93 0	1 3 1 0	4 5 0	8 3 0	7 2 0	2 0 8	2 4 0	7 0	2 1	13	3 2 0	2 8 0	2 5 8	2 2 0	8- 1 8	M 16	3 6 0	2 7	68	22 3.2	41 3.9
	25 0	3 2 5	4 3 5	10 80	1 5 1 5	5 0 5	9 4 0	8 7 0	2 4 6	2 8 0	7 0	2 1	14	3 7 5	3 3 5	3 1 2	2 4 0	1 2- 1 8	M 16	4 5 0	3 2	80	30 8.8	57 5.2