JIS MARINE QUICK CLOSING VALVE

# Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K

ISO9001 Supplier

Class Certificate

Export Supply

Marine Emergency Shut-Off Valve is also called as Marine Quick Closing Valve. It is used to shut off the fuel oil pipeline in emergency. It can controlled by lever or the air cylinder. Materical can be cast steel, bronze...




## Key Highlights

| | |
|---|---|
| **Category** | JIS Marine Quick Closing Valve |
| **Standard** | JIS |
| **Material** | Cast Steel, Nodular Iron |
| **Weight / Size** | JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for... |
| **Certificate** | CCS, BV, ABS, GL, LR, DNV, NK,RINA |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


## Technical Specifications

| | | | |
|---|---|---|---|
| **Category** | JIS Marine Quick Closing Valve | **Model / SKU** | Marine-Cast-Steel-Emergency-Shut-Off-Valve-JIS-F7399-10K |
| **Standard** | JIS | **Material** | Cast Steel, Nodular Iron |
| **Weight / Size** | JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for quick closing-0.1Mpa Flange size as per JIS B2220 - 10K Main Material: | **Certificate** | CCS, BV, ABS, GL, LR, DNV, NK,RINA |
| **Warranty** | 12 Months unless specified otherwise | **Origin** | China |

**CONTENTS**

- China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K:
- Main Size List(mm):
- Main Material:

## China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 10K:

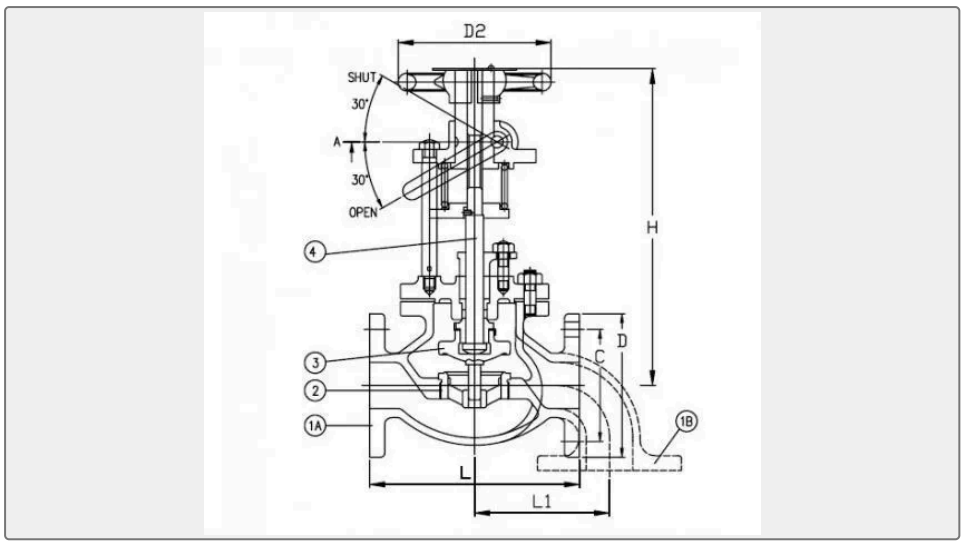


Marine Emergency Shut-Off Valve is also called as Marine Quick Closing Valve. It is used to shut off the fuel oil pipeline in emergency. It can controlled by lever or the air cylinder. Materical can be cast steel, bronze, nodular iron.

Operation type: Manual (Lever) or Pneumatically operated

Design Standard: JIS F7399-1996

Test Standard: JIS 7400-1996

Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for quick closing-0.1Mpa

Flange size as per JIS B2220 - 10K

## Main Material:

Body: Cast Steel

Bonnet: Cast Steel

Seat: Brass

Disc: Brass

Stem: Brass

Operation Spindle: SUS403

Operation Lever: SUS403

Handwheel: FC200 (Cast iron)

## Main Size List(mm):

| DN | L | D | C | No of bolt hole | bolt hole diameter | flange thickness | H | D2 |
|---|---|---|---|---|---|---|---|---|
| 40 | 170 | 140 | 105 | 4 | 19 | 16 | 310 | 140 |
| 50 | 220 | 155 | 120 | 4 | 19 | 16 | 335 | 160 |
| 65 | 270 | 175 | 140 | 4 | 18 | 18 | 395 | 180 |
| 80 | 300 | 185 | 150 | 8 | 19 | 18 | 420 | 180 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 100 | 350 | 210 | 175 | 8 | 20 | 18 | 510 | 224 |
| 125 | 420 | 250 | 210 | 8 | 19 | 20 | 440 | 250 |
| 150 | 490 | 280 | 240 | 8 | 19 | 22 | 520 | 320 |