

CB MARINE GATE VALVE

Marine Cast Steel Gate Valve CB/T466-1995

ISO9001 Supplier

Class Certificate

Export Supply

Marine cast steel gate valve is used on the pipe system for sea water, fresh water,lubrication oil. Design Standard: CB/T466-1995 Test Standard: GB600 Flange Size as per GB569 or GB2501 ...



Key Highlights

Category	CB Marine Gate Valve
Standard	GB
Material	Cast Steel
Weight / Size	GB600 Flange Size as per GB569 or GB2501 nominal pressure (Mpa) nominal ...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	CB Marine Gate Valve	Model / SKU	Marine-Cast-Steel-Gate-Valve-CB-T466-1995
Standard	GB	Material	Cast Steel
Weight / Size	GB600 Flange Size as per GB569 or GB2501 nominal pressure (Mpa) nominal diameter(mm) applicable medium 1.0 50-100 sea water,fresh water,lubrication oil 0.6 125-150 0.4 175-300 0.25 350-500 Main Parts & Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Marine Cast Steel Gate Valve CB/T466-1995:
- Main Parts & Material:
- Main Size List(mm):

China Marine Cast Steel Gate Valve CB/T466-1995:

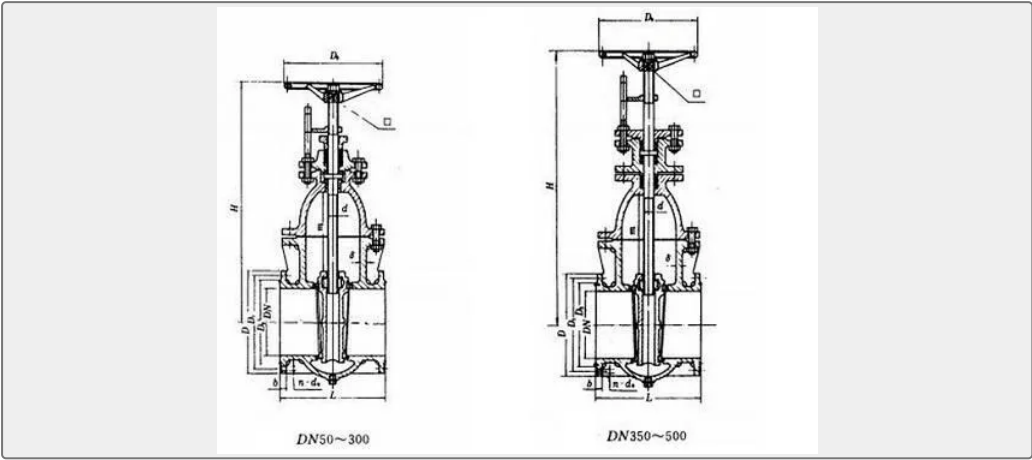

Marine cast steel gate valve is used on the pipe system for sea water, fresh water,lubrication oil.

Design Standard: CB/T466-1995

Test Standard: GB600

Flange Size as per GB569 or GB2501

nominal pressure (Mpa)	nominal diameter(mm)	applicable medium
1.0	50-100	sea water,fresh water,lubrication oil
0.6	125-150	
0.4	175-300	
0.25	350-500	

Main Parts & Material:

- Body-Cast Steel
- Bonnet-Cast Steel
- Disc-Cast Steel
- Stem-Stainless Steel
- Nut-Bronze
- Seal Ring-Stainless Steel

Main Size List(mm):

For Type A:

PN Mp a	DN (m m)	Structure Dimension		Flange					Bolt		Thicknes s δ	stem		han d whe el D0	Lift Range m	Weig ht (kg)
		L $\approx$	H $\approx$	D	D1	D2	b	d 0	n	Th.		d	$\square$			
1.0	50	190	340	135	103	84	13	15	6	M14	8	Tr22 $\times$ 10(P5))LH	14	180	60	18
	65	200	372	155	123	104	14	15	6	M14	9	Tr22 $\times$ 10(P5))LH	14	180	75	20
	80	220	430	179	138	118	14	15	8	M14	9	Tr24 $\times$ 10(P5))LH	17	200	92	25
	100	220	460	190	158	138	14	15	8	M14	10	Tr24 $\times$ 10(P5))LH	17	200	112	28
0.6	125	242	528	215	183	164	14	15	10	M14	10	Tr26 $\times$ 10(P5))LH	19	225	138	41
	150	248	566	240	208	190	14	15	12	M14	10	Tr26 $\times$ 10(P5))LH	19	225	165	51
0.4	175	268	630	270	238	221	15	15	12	M14	11	Tr28 $\times$ 10(P5))LH	22	250	190	70
	200	278	685	295	264	247	15	15	12	M14	11	Tr28 $\times$ 10(P5))LH	22	250	215	80
	250	310	755	365	327	306	16	16	14	M16	13	Tr30 $\times$ 12(P6))LH	24	280	265	111
	300	345	835	430	386	360	19	19	14	M20	13	Tr30 $\times$ 12(P6))LH	24	280	315	134
0.25	350	400	954	480	436	410	20	20	16	M20	14	Tr36 $\times$ 12(P6))LH	27	320	365	219
	400	430	1045	530	486	460	21	21	16	M20	15	Tr36 $\times$ 12(P6))LH	27	360	418	267
	450	460	1228	580	536	512	21	21	18	M20	16	Tr40 $\times$ 12(P6))LH	32	400	421	395
	500	480	1315	635	591	567	21	21	20	M20	16	Tr40 $\times$ 12(P6))LH	32	450	518	519

For Type AS:

PN Mp a	DN (mm)	Structure Dimension		Flange					Bolt		stem		hand whe el D0	Lift Range m	Weigh t (kg)
		L $\approx$	H $\approx$	D	D1	D2	b	d 0	n	Th.	d	$\square$			

1.0	50	178	340	16 5	12 5	10 2	2 0	1 8	4	M1 6	Tr22×10(P5)L H	1 4	180	60	20.3
	65	190	372	18 5	14 5	12 2	2 0	1 8	4	M1 6	Tr22×10(P5)L H	1 4	180	75	24.5
	80	203	430	20 0	16 0	13 3	2 0	1 8	8	M1 6	Tr24×10(P5)L H	1 7	200	92	33.8
	100	229	460	22 0	18 0	15 8	2 2	1 8	8	M1 6	Tr24×10(P5)L H	1 7	200	112	41.2
0.6	125	254	528	24 0	20 0	17 8	2 0	1 8	8	M1 6	Tr26×10(P5)L H	1 9	225	138	62.1
	150	267	566	26 5	22 5	20 2	2 0	1 8	8	M1 6	Tr26×10(P5)L H	1 9	225	165	71.6
0.4	175	292	630	29 5	25 5	23 2	2 2	1 8	8	M1 6	Tr28×10(P5)L H	2 2	250	190	86.4
	200	292	685	32 0	28 0	25 8	2 2	1 8	8	M1 6	Tr28×10(P5)L H	2 2	250	215	101.8
	250	330	755	37 5	33 5	31 2	2 4	2 2	1 2	M2 0	Tr30×12(P6)L H	2 4	280	265	155.1
	300	356	835	44 0	39 5	36 5	2 4	2 2	1 2	M2 0	Tr30×12(P6)L H	2 4	280	315	201.2
0.2 5	350	381	954	49 0	44 5	41 5	2 6	2 2	1 2	M2 0	Tr36×12(P6)L H	2 7	320	365	298.3
	400	406	1145	54 0	49 5	46 5	2 8	2 2	1 6	M2 0	Tr36×12(P6)L H	2 7	360	418	372.1
	450	432	1330	59 5	55 0	52 0	2 8	2 2	1 6	M2 0	Tr40×12(P6)L H	3 2	400	468	560.0
	500	457	1420	64 5	60 0	57 0	3 0	2 2	2 0	M2 0	Tr40×12(P6)L H	3 2	450	510	627.4