

CB MARINE STORM VALVE

Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS

ISO9001 Supplier

Class Certificate

Export Supply

Marine Screw Down Vertical Storm Valve is used on the pipe system with the medium sea water, fresh water & sewage. It can be closed by the handwheel. Design Standard:CB/T3477-92 Test Standard: GB600 ...



Key Highlights

Category	CB Marine Storm Valve
Standard	GB
Material	Cast Steel
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight T...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	CB Marine Storm Valve	Model / SKU	Marine-Cast-Steel-Screw-Down-Vertical-Storm-Valve-CB-T3477-92-Type-A-AS
Standard	GB	Material	Cast Steel
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight Type, Flange size as per GB2501 Type B- Angle Type, Flange size as per GB569 Type BS-Angle Type, Flange size as per GB2501 Type Nominal Pressure (Mpa) Nominal Size (mm) Applicable medium A,AS,B,BS 0.1 50-150 sea water, fresh water & sewage Main Parts & Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	- China Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS: - Main Size List(mm):	Main Parts & Material:
----------	--	--

China Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS:

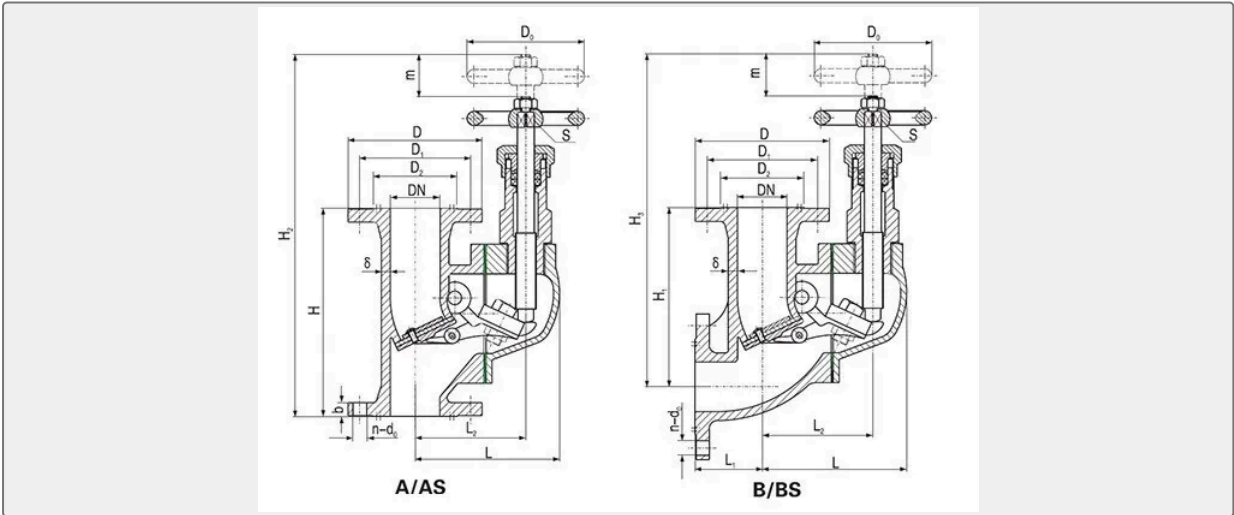

Type A- Straight Type, Flange size as per GB569

Type AS-Straight Type, Flange size as per GB2501

Type B- Angle Type, Flange size as per GB569

Type BS-Angle Type, Flange size as per GB2501

Type	Nominal Pressure (Mpa)	Nominal Size (mm)	Applicable medium
A,AS,B,BS	0.1	50-150	sea water, fresh water & sewage

Main Parts & Material:

Body-Cast Steel

Bonnet-Cast Steel

Disc-Bronze

Stem-Bronze

Clamp Material-Brass

Main Size List(mm):

For Type A,B:

nomi nal diam eter	structure dimension							Thick ness δ	flange connection dimension					bolt		hand wheel		Lift Range m	Weight(kg)		
																			cast steel		
	H	H 1	H 2	H 3	L	L1	L2		cast steel	D	D1	D2	b	d 0	n	Th.	Do		S	A	B
50	210	170	360	327	135	90	100	7.5	135	103	84	13	15	6	M14	80	11	40	12	13	
65	240	200	385	342	142	110	110	8.0	155	123	104	14	15	6	M14	80	11	45	17	19	
80	260	220	400	370	155	120	120	8.5	170	138	118	14	15	8	M14	80	11	45	22	24	
100	280	250	430	393	172	130	137	9.0	190	158	138	14	15	8	M14	80	11	45	30	35	
125	330	270	465	407	195	150	160	10.0	215	183	164	14	15	10	M14	80	11	65	44	50	
150	360	310	490	437	213	165	174	11.0	240	208	190	14	15	12	M14	120	11	65	52	67	

For Type AS, BS:

nomi nal diam eter	structure dimension							Thick ness δ	flange connection dimension					bolt		hand wheel		Lift Range m	Weight(kg)		
																			cast steel		
	H	H 1	H 2	H 3	L	L1	L2		cast steel	D	D1	D2	b	d 0	n	Th.	Do		S	AS	BS
50	21 0	17 0	36 0	32 7	13 5	90	10 0	8.0	14 0	11 0	90	1 6	1 4	4	M1 2	80	11	40	12	13	
65	24 0	20 0	38 5	34 2	14 2	11 0	11 0	8.0	16 0	13 0	11 0	1 6	1 4	4	M1 2	80	11	45	17	19	
80	26 0	22 0	40 0	37 0	15 5	12 0	12 0	9.0	19 0	15 0	12 8	1 8	1 8	4	M1 6	80	11	45	22	24	
100	28 0	25 0	43 0	39 3	17 2	13 0	13 7	9.0	21 0	17 0	14 8	1 8	1 8	4	M1 6	80	11	45	30	35	
125	33 0	27 0	46 5	40 7	19 5	15 0	16 0	10.0	24 0	20 0	17 8	2 0	1 8	8	M1 6	80	11	65	44	50	
150	36 0	31 0	49 0	43 7	21 3	16 5	17 4	10.0	26 5	22 5	20 2	2 0	1 8	8	M1 6	120	11	65	52	67	